


Roofdor S Data Sheet



Access hatch – mounted to Collar

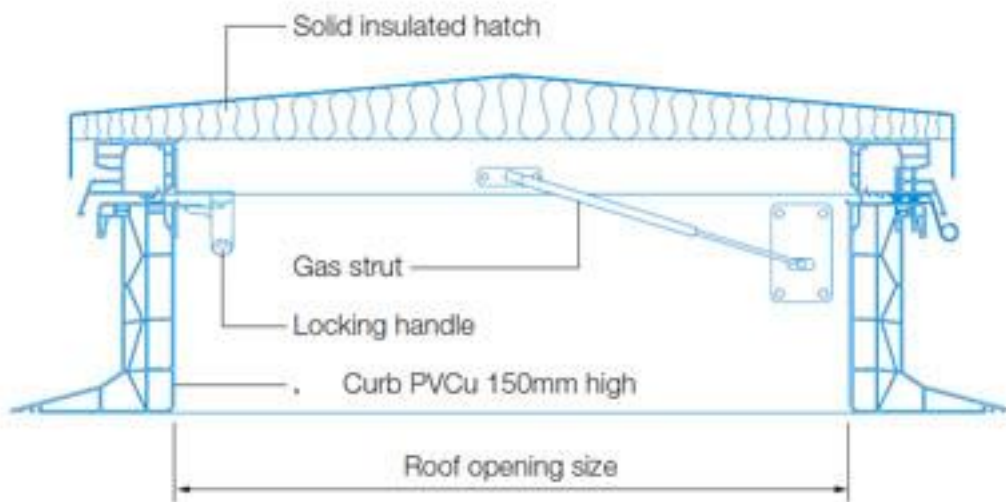

Roofdor S Data Sheet

Description

The Roofdor S is designed to allow access to and from roof areas and can form part of a fire escape route, they are used for accessing roof mounted plant, equipment and for any other maintenance tasks. They are available with either external or internal locking. They can also be supplied with a glazed lid, bringing the added benefit of natural daylight into the building.

Accessories

They are available with a range of up stands and ventilation products, making them suitable for a new build or refurbishment projects.

Technical Specification

Thermal transmission (W/m.K)	1.20*
Fire rating to BS476 Part 3	AA
Sound resistance (db)	28
Air permeability to EN1873	A4
Water tightness to EN1873	Pass
Impact test to EN1873	1200/J
Impact test to ACR [M] 001:2005	Class B

*Whole unit value calculated according to EN ISO 6946

