


# Fixation

## Fixation Brights/Fixation Neutrals/Fixation Accents/Fixation Shapes

Construction	Tufted, Level Loop Pile
Face Fibre	Nylon 6
Soil Release	StainSmart® for soil release, liquid repellence
Finished Face Weight	420 gm <sup>2</sup>
Gauge	40 / 10 cm
Rows	56 / 10 cm
Tuft Density	224,000/m <sup>2</sup>
Finished Pile Height	3.0 mm
Standard Backing	90% Recycled content Polyurethane cushion Available with TractionBack® on request
Nominal Total Thickness	8.8 mm
Tile Size	457.2 x 457.2 mm
Nominal Total Weight	3700 gm <sup>2</sup>
Tiles per Box	22 (4.598m <sup>2</sup> )

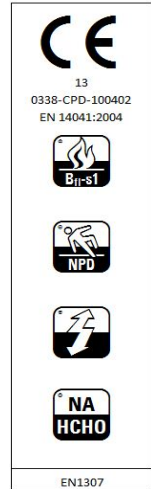

### PERFORMANCE

Flammability (Euroclassification EN13501:1-2002)	Class Bfl - s1
Flammability (Radiant Panel ASTM-E-648)	Class 1
Flammability (Hot metal nut BS4790)	Low radius of Char
Use Classification (EN1307)	Class 3 3 Heavy Commercial Use
Static Electricity (ISO 6356)	≤ 2.0 KV, Permanent Conductive Fibre
Impact Sound (ISO 140-8)	30 dB
Sound absorption (ISO 354)	0.3 Class D

### ENVIRONMENTAL

90% Recycled content cushion backing  
11% Recycled content by total product weight  
GUT & CRI Green Label Plus certified for indoor air quality  
BRE ENP 491 Certification - A/A+

Design Copyright - Milliken & Company

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending.

Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.




1096



DBBDB71A



ENP491

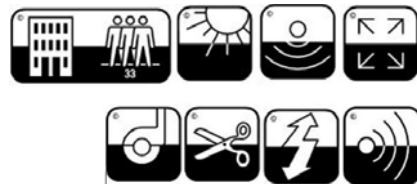


### Warranties:

12 year wear warranty  
Lifetime Antistatic warranty  
Latent Defects warranty

### Installation Method:

Brick



Milliken.