

Fusion Flex Single 4.6w

LED ARCHITECTURE

FF/24/0.5/****/##

**** specified kelvin colour temperate ## denotes IP rating

Our Fusion Flex Single products are traditionally used to provide detail lighting. Often to highlight features of joiner, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source. Common colour temperatures stocked and dispatched within 2 days. Custom colour orders and manufacture fittings increase lead time.



@ Residential London



@ Residential London



@ Czech & Speake



@ Linklaters London




@ Residential London



@ NBC Universal London

Fusion Flex Single LED strip

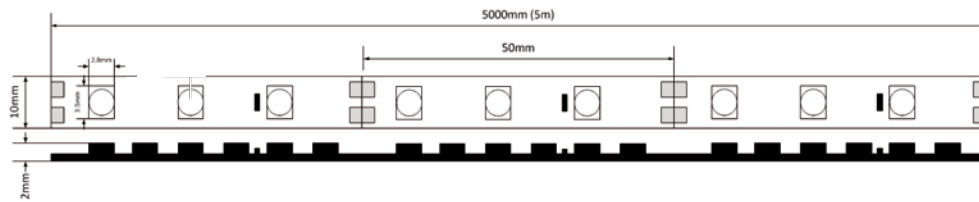

To specify state:

Fusion Flex Single (Profile)/FF/24/0.5/****/##

Controlled diode manufactured LED PCB on a flexible strip 10mm wide, 24volts 4.6w per meter.

IP rating IP22/65. Made to specific lengths or supplied on 5 meter reels by Edward Ray International Ltd.

Width	10	mm
Depth	2	mm
Length	5	m/reel
Voltage	24	Vdc
Wattage	4.6	W/m
Output	350	lm/m
Colour T.	2700,4500,6000*	K
IP Rating	22/65	-
MOQ	1 reel (5m)	-


*Stock Colours, custom available

The most popular profiles for use with our Fusion Flex Single. They can also be ordered without the LED product.



To include the profile within your specification, complete with the Fusion Flex Single, prefix the LED product code with the code for the profile. eg. S005/FF/24/0.5/****/##

**** specified kelvin colour temperate ## denotes IP rating


S005




S007



S008



K104



Fusion Flex Single 9.6w

LED ARCHITECTURE


FF/24/1/***/##

*** specified kelvin colour temperate ## denotes IP rating

Our Fusion Flex Single products are traditionally used to provide detail lighting. Often to highlight features of joiner, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source. Common colour temperatures stocked and dispatched within 2 days. Custom colour orders and manufacture fittings increase lead time.



@ Topshop

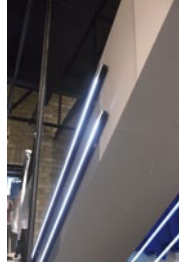


@ Topman London



@ Harrods



@ Residential London

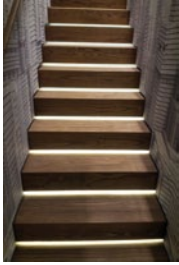


@ Residential Ascot



@ NBC Universal London

Width	10	mm
Depth	2	mm
Length	5	m/reel
Voltage	24	Vdc
Wattage	9.6	W/m
Output	750	lm/m
Colour T.	2700,4500,6000*	K
IP Rating	22/65	-
MOQ	1 reel (5m)	-

Fusion Flex Single LED strip

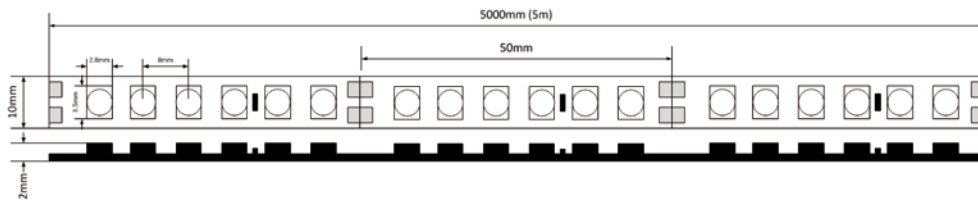

To specify state:

Fusion Flex Single (Profile)/FF/24/1/***/## | Also available as Dual 3000-6000K

Controlled diode manufactured LED PCB on a flexible strip 10mm wide, 24volts 9.6w per meter.

IP rating IP22/65. Made to specific lengths or supplied on 5 meter reels by Edward Ray International Ltd.


*Stock Colours, custom available

The most popular profiles for use with our Fusion Flex Single. They can also be ordered without the LED product.



To include the profile within your specification, complete with the Fusion Flex Single, prefix the LED product code with the code for the profile. eg. T006/FF/24/1/***/##

*** specified kelvin colour temperate ## denotes IP rating


S005




S007



S008



K104



LED ARCHITECTURE


FF/24/2/****/##

**** specified kelvin colour temperate ## denotes IP rating
 Our Fusion Flex Twin products are traditionally used to provide detail lighting. Often to highlight features of joiner, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source. Common colour temperatures stocked and dispatched within 2 days. Custom colour orders and manufacture fittings increase lead time.


Width	16	mm
Depth	2	mm
Length	5	m/reel
Voltage	24	Vdc
Wattage	19.2	W/m
Output	1500	lm/m
Colour T.	3000 - 6000	K
IP Rating	22/65	-
MOQ	1 reel (5m)	-

*Stock Colours, custom available
 The most popular profiles for use with our Fusion Flex Twin. They can also be ordered without the LED product.
 To include the profile within your specification, complete with the Fusion Flex Twin, prefix the LED product code with the code for the profile. eg. T006/FF/24/2/****/##
 **** specified kelvin colour temperate ## denotes IP rating

S009




S010





C010




T004



Fusion Flex Twin 19.2w

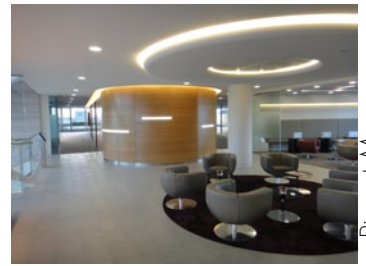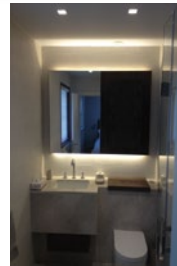

Fusion Flex Twin LED strip

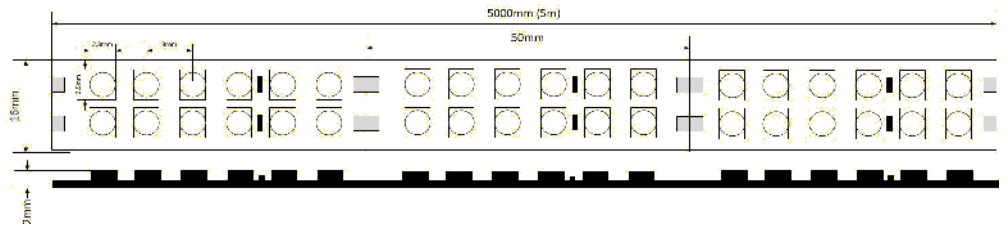

To specify state:
 Fusion Flex Treble (Profile)/FF/24/2/****/## | Also available as Dual 3000-6000K
 Controlled diode manufactured LED PCB on a flexible strip 16mm wide, 24volts 19.2w per meter.
 IP rating IP22/65. Made to specific lengths or supplied on 5 meter reels by Edward Ray International Ltd.



Fusion Flex Treble 28.8w

LED ARCHITECTURE

FF/24/3/RGB/##

**** specified kelvin colour temperate ## denotes IP rating

Our Fusion Flex Treble products are traditionally used to provide detail lighting. Often to highlight features of joiner, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source. Common colour temperatures stocked and dispatched within 2 days. Custom colour orders and manufacture fittings increase lead time.



@ MUSI Offices London




@ Primark Manchester



@ NBC Universal London



@ BBC London

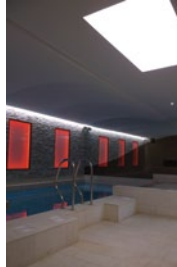


@ Residential Birmingham



@ SKY TV London

Fusion Flex Treble LED RGB strip

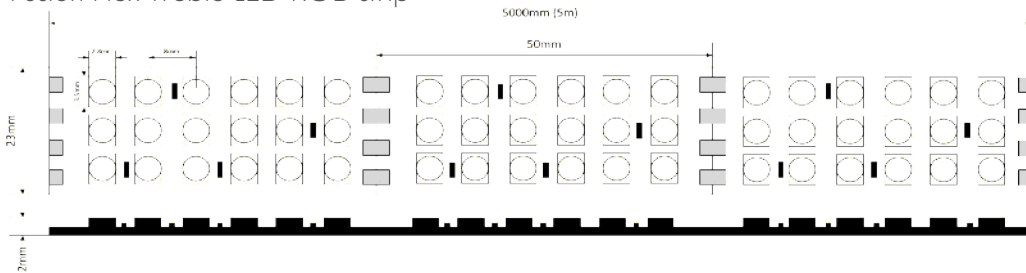

To specify state:

Fusion Flex Treble (Profile)/FF/24/3/RGB/##

Controlled diode manufactured LED PCB on a flexible strip 23mm wide, 24volts 28.8w per meter.

IP rating IP22/65. Made to specific lengths or supplied on 5 meter reels by Edward Ray International Ltd.

Width	23	mm
Depth	2	mm
Length	5	m/reel
Voltage	24	Vdc
Wattage	28.8	W/m
Output	2250	lm/m
Colour T.	RGB	
IP Rating	22/65	-
MOQ	1 reel (5m)	-


*Stock Colours, custom available

The most popular profiles for use with our Fusion Flex Treble. They can also be ordered without the LED product.



To include the profile within your specification, complete with the Fusion Flex Treble prefix the LED product code with the code for the profile. eg. T006/FF/24/3/RGB/##

**** specified kelvin colour temperate ## denotes IP rating



T006






L35



L36



L47

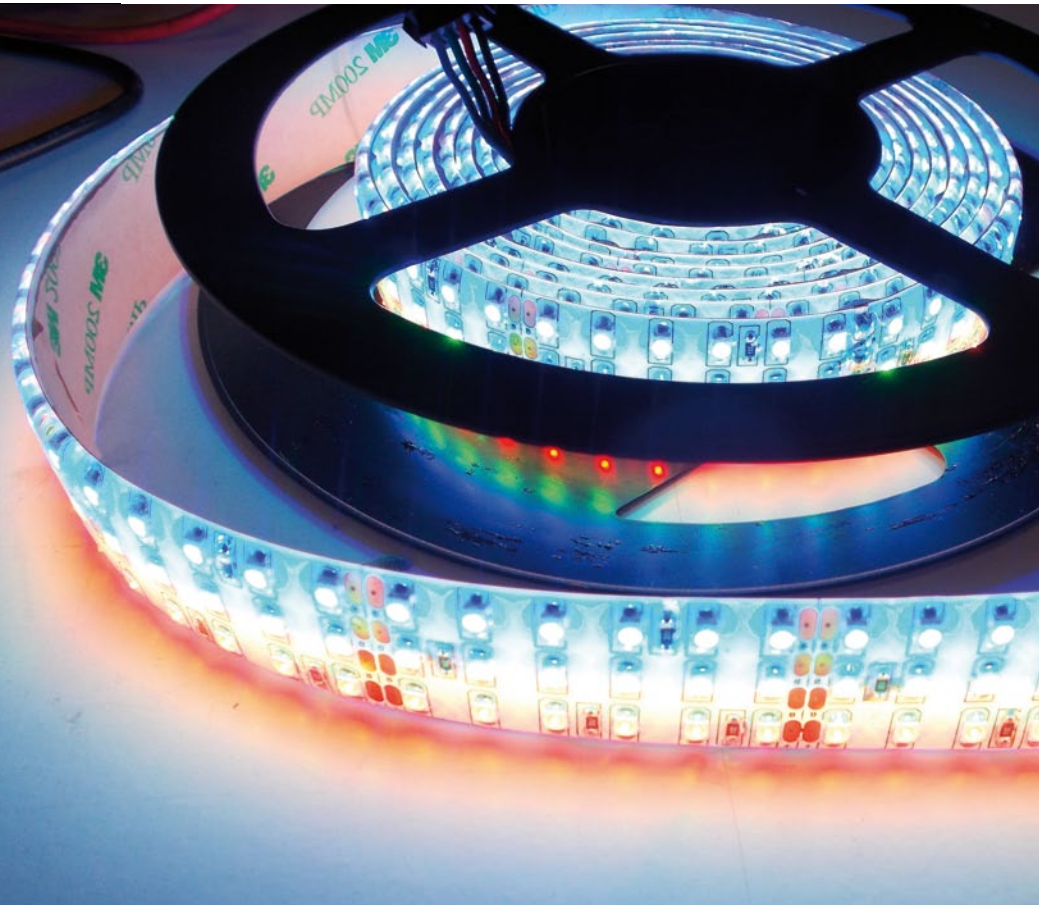

• LED Architecture • Stretch Ceilings • Stretch Mirror • Architectural Metalwork • Light Boxes



Discover our
Products


Fusion Flex Quad 38.6w

LED ARCHITECTURE

FF/24/4/****/##

**** specified kelvin colour temperate ## denotes IP rating


Our Fusion Flex Quad products are traditionally used to provide detail lighting. Often to highlight features of joiner, stair treads or illuminate shelving where you require something to be illuminated instead of providing a light source. Common colour temperatures stocked and dispatched within 2 days. Custom colour orders and manufacture fittings increase lead time.

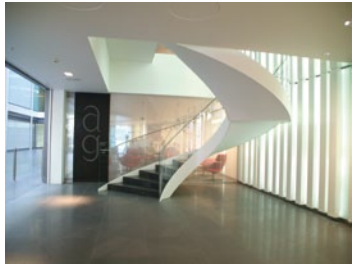

@ Addleshaw Goddard




@ Linklaters London

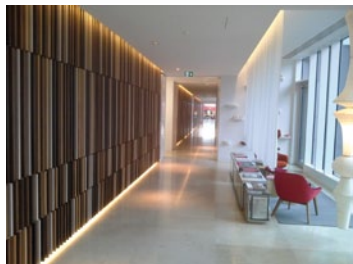

@ King's Cross



@ Residential London

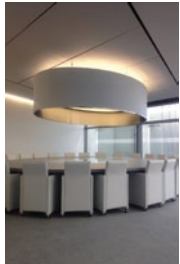


@ Repsol Madrid Offices



@ London Clinic


Fusion Flex Quad LED strip

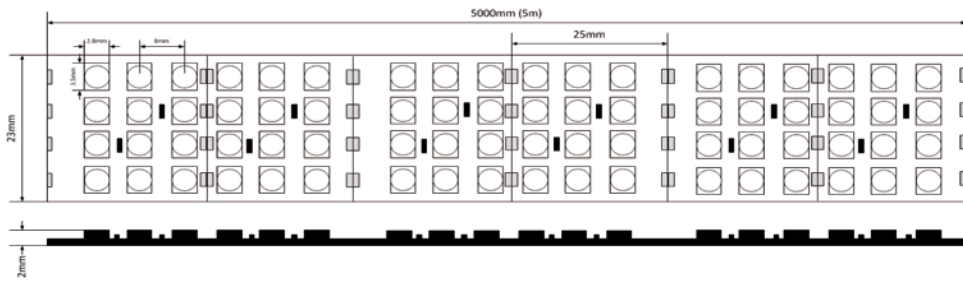

To specify state:

Fusion Flex Single (Profile)/FF/24/4/****/##

Controlled diode manufactured LED PCB on a flexible strip 23mm wide, 24volts 38.6w per meter. IP rating IP22/65. Made to specific lengths or supplied on 5 meter reels by Edward Ray International Ltd: info@edwardray.co.uk - +441276686175

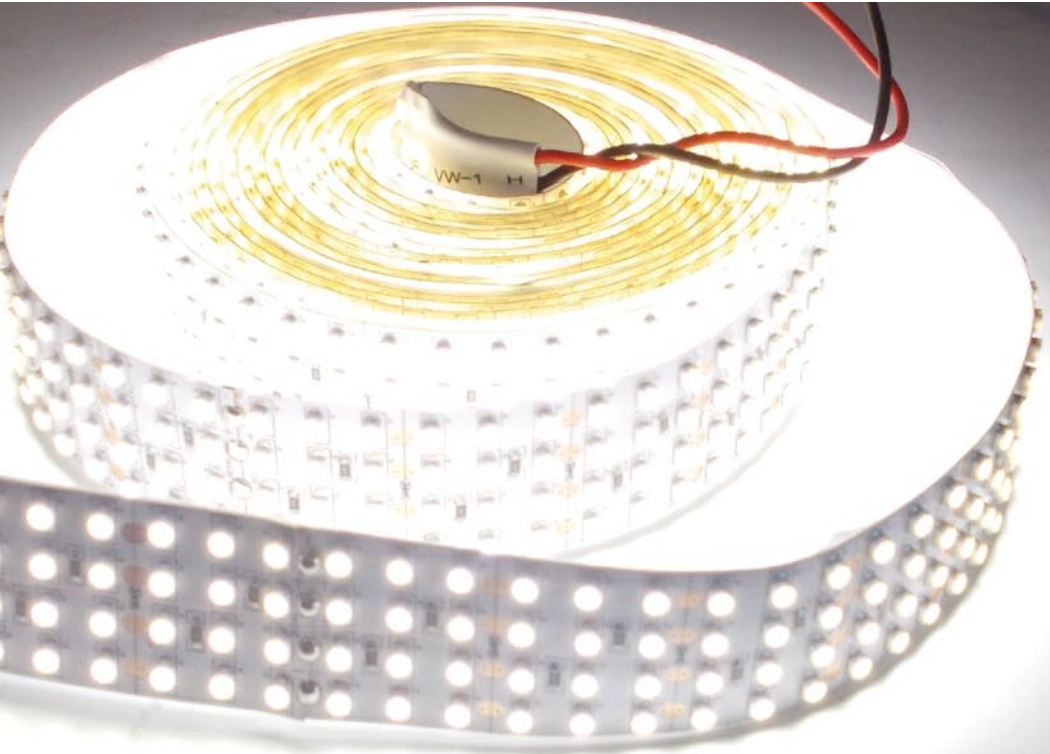



Width	23	mm
Depth	2	mm
Length	5	m/reel
Voltage	24	Vdc
Wattage	38.6	W/m
Output	2950	lm/m
Colour T.	2700,4500,6000*	K
IP Rating	22/65	-
MOQ	1 reel (5m)	-

*Stock Colours, custom available



The most popular profiles for use with our Fusion Flex Quad. They can also be ordered without the LED product.

To include the profile within your specification, complete with the Fusion Flex Single, prefix the LED product code with the code for the profile. eg. T006/FF/24/4/****/##



T006




L35



L36




L47



FUSION FLEX LED


Suitable for Single Fusion Flex

T001




Suitable for Single Fusion Flex

T002




Suitable for Single Fusion Flex

T003




Suitable for Twin Fusion Flex

T004




Suitable for Single Fusion Flex

COVE




Suitable for Quad Fusion Flex

L048




Suitable for Single Fusion Flex

C005



Suitable for Single Fusion Flex

ALPO33



EDWARD RAY®
INTERNATIONAL Ltd *think green*

CERTIFICATE OF CONFORMITY

CERTIFICATE NO. : ER20130204-003
 HOLDER : Edward Ray International Ltd
 ADDRESS : Westward House
 Glebeland Road
 Camberley
 Surrey
 GU15 3DB
 PRODUCT : FUSION FLEX LED TAPE
 MODEL NUMBER(S) : FF/24/1/3000/65 - FF/24/1/4500/65 - FF/24/1/6000/65 -
 FF/24/1/3000/22 - FF/24/1/4500/22 - FF/24/1/6000/22 -
 FF/24/2/3000/65 - FF/24/2/4500/65 - FF/24/2/6000/65 -
 FF/24/2/3000/22 - FF/24/2/4500/22 - FF/24/2/6000/22 -
 FF/24/3/3000/65 - FF/24/3/4500/65 - FF/24/3/6000/65 -
 FF/24/3/3000/22 - FF/24/3/4500/22 - FF/24/3/6000/22 -
 FF/24/4/3000/65 - FF/24/4/4500/65 - FF/24/4/6000/65 -
 FF/24/4/3000/22 - FF/24/4/4500/22 - FF/24/4/6000/22
 TEST STANDARD : EN 55015:2006 + A1:2007-A2:2009
 EN 61000-3-2:2006+A1:2009+A2:2009; EN 61000-3-3:2008
 EN 61541:2009
 EN 61000-4-2:2009; EN 61000-4-3:2005
 EN 61000-4-4:2004+A1:2010; EN 61000-4-5:2006
 EN 61000-4-6:2009
 EN 61000-4-8:2005; EN 61000-4-11:2004

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2004/108/EC. It is possible to use CE marking to demonstrate the compliance with this EMC directive. This certificate of conformity is based on a single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant directives have to be observed.



Signed:
 Date: 4th February 2013

Westward House, Glebeland Road, Camberley, Surrey GU15 3DB
 www.edwardray.co.uk e: info@edwardray.co.uk t: 01276 686175 f: 08721 114992
 Registered in England and Wales under Company registration No 75921067



EDWARD RAY®
INTERNATIONAL Ltd *think green*

CERTIFICATE OF CONFORMITY

CERTIFICATE NO. : ER20130204-004
 HOLDER : Edward Ray International Ltd
 ADDRESS : Westward House
 Glebeland Road
 Camberley
 Surrey
 GU15 3DB
 PRODUCT : FUSION FLEX LED TAPE
 MODEL NUMBER(S) : FF/24/1/3000/65 - FF/24/1/4500/65 - FF/24/1/6000/65 -
 FF/24/1/3000/22 - FF/24/1/4500/22 - FF/24/1/6000/22 -
 FF/24/2/3000/65 - FF/24/2/4500/65 - FF/24/2/6000/65 -
 FF/24/2/3000/22 - FF/24/2/4500/22 - FF/24/2/6000/22 -
 FF/24/3/3000/65 - FF/24/3/4500/65 - FF/24/3/6000/65 -
 FF/24/3/3000/22 - FF/24/3/4500/22 - FF/24/3/6000/22 -
 FF/24/4/3000/65 - FF/24/4/4500/65 - FF/24/4/6000/65 -
 FF/24/4/3000/22 - FF/24/4/4500/22 - FF/24/4/6000/22

TEST STANDARD : EN 60598-1:2008+A11:2009
 EN 60598-2-1:1989

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD directive 2006/95/EC. It is possible to use CE marking to demonstrate the compliance with this LVD Directive. This certificate of conformity is based on a single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant directives have to be observed.



Signed:
 Date: 4th February 2013

Westward House, Glebeland Road, Camberley, Surrey GU15 3DB
 www.edwardray.co.uk e: info@edwardray.co.uk t: 01276 686175 f: 08721 114992
 Registered in England and Wales under Company registration No 75921067



EDWARD RAY®
INTERNATIONAL Ltd *think green*

CERTIFICATE OF CONFORMITY

CERTIFICATE NO. : ER20130204-006
 HOLDER : Edward Ray International Ltd
 ADDRESS : Westward House
 Glebeland Road
 Camberley
 Surrey
 GU15 3DB
 PRODUCT : FUSION FLEX LED TAPE
 MODEL NUMBER(S) : FF/24/1/3000/65 - FF/24/1/4500/65 - FF/24/1/6000/65 -
 FF/24/1/3000/22 - FF/24/1/4500/22 - FF/24/1/6000/22 -
 FF/24/2/3000/65 - FF/24/2/4500/65 - FF/24/2/6000/65 -
 FF/24/2/3000/22 - FF/24/2/4500/22 - FF/24/2/6000/22 -
 FF/24/3/3000/65 - FF/24/3/4500/65 - FF/24/3/6000/65 -
 FF/24/3/3000/22 - FF/24/3/4500/22 - FF/24/3/6000/22 -
 FF/24/4/3000/65 - FF/24/4/4500/65 - FF/24/4/6000/65 -
 FF/24/4/3000/22 - FF/24/4/4500/22 - FF/24/4/6000/22

TEST STANDARD : EPA3050B:1996; EN1122:2001
 EPA3052:1996; EPA3060A
 EPA7196; EPA3540C; EPA8270C

The EUT described above has been consolidated by us and found in compliance with the council RoHS directive - 2002/95/EX. It is only valid in connection with the test report number: CTC2001009723 SZ4.



Signed:
 Date: 4th February 2013

Westward House, Glebeland Road, Camberley, Surrey GU15 3DB
 www.edwardray.co.uk e: info@edwardray.co.uk t: 01276 686175 f: 08721 114992
 Registered in England and Wales under Company registration No 75921067