


60 MINUTE FIRE RATED LETTERPLATE

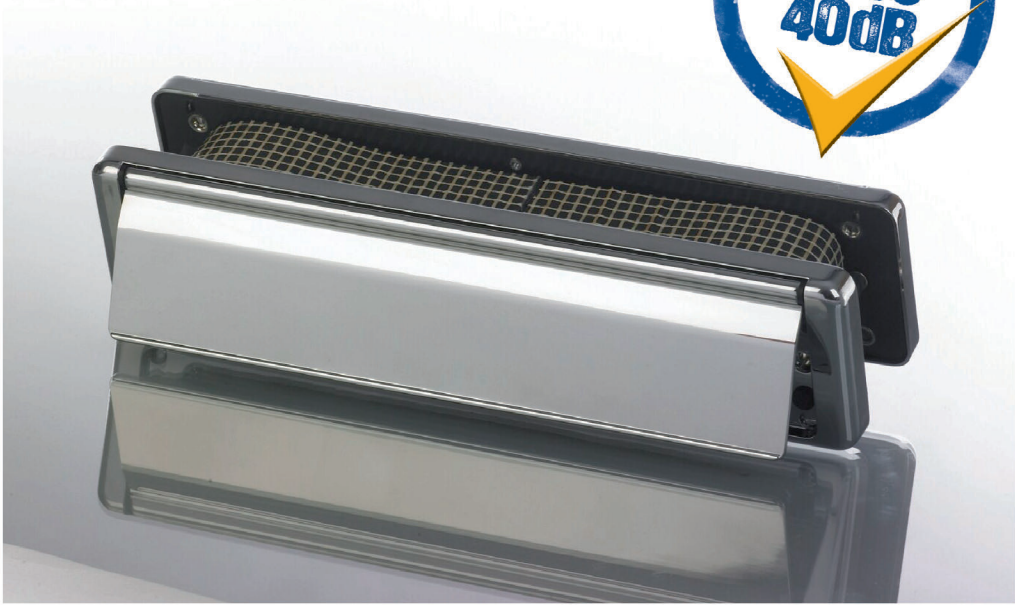

Features

- Designed for Timber and Composite Doors.
- Conforms to the requirement of BS EN 13724:2002.
- 180-degree flap means flaps won't snap off.
- Two faceplate height options: Standard 76mm or Slimline 68mm.
- Available to suit different mid-rail and panel thicknesses.
- Detachable location screws on rear plate for mass production uses.
- Fully Sprung loaded.
- Individually boxed for additional protection.
- Lifetime tested to 50,000 cycles.
- All finishes salt spray tested to 480 hours (BS EN 1670).
- Full weather sealing to provide a draft free environment.
- Fire Resistant version (with intumescent strip): 60 minute.
- Warrington Fire Test report (WF Report No. 136789) 60 minute within a section of timber based door leaf.
- Tested to BS 476-22: 1987 Fire Tests on building materials and structures.

NORSOUND LTD

Unit 5, Regents Drive, Prudhoe,
Northumberland NE42 6PX
United Kingdom

T. 01661 831 311
F. 01661 830 099
sales@norsound.co.uk
www.norsound.co.uk

NORSOUND