


Fitting Instructions, Norsound 630 Threshold Plate

Tools Required



Length

Installation Detail

It is not necessary to remove door(s) from its hinges

1: Cut to length

Remove plate from its packaging, measure the door width (between jambs or the door stops) to determine the length the plate needs to be cut down to.

Measure the plate and mark with pencil the desired length, Machine cut the threshold plate at the line. (Where threshold plate meets the door stop, sealant may be applied to prevent water leakage).

2: Fasten to floor.

Position plate on door sill in required location.

A: Screw fix.

Using a power drill with a 3mm drill bit, create fixing holes in required position, approx 200mm apart, making sure to countersink each individual fixing hole to ensure screws are flush when fitted.

Screw fix using screws and plugs supplied.

B: Adhesive fix.

Apply adhesive in channel(s) provided on under side of thresh, place in required position. Allow to dry.

We recommended Norsound Adhesive for this purpose.

Description of contents.

- 1: Aluminium threshold
- 2: Screws and plugs
- 3: Fitting instructions



Other Norsound seals include.

- Door perimeter seals
- Door bottom seals
- Automatic door bottom seals
- Threshold plates

All designed for Acoustic purposes.

IMPORTANT

Ensure that the installation of this product does not impede the opening or closing the door.

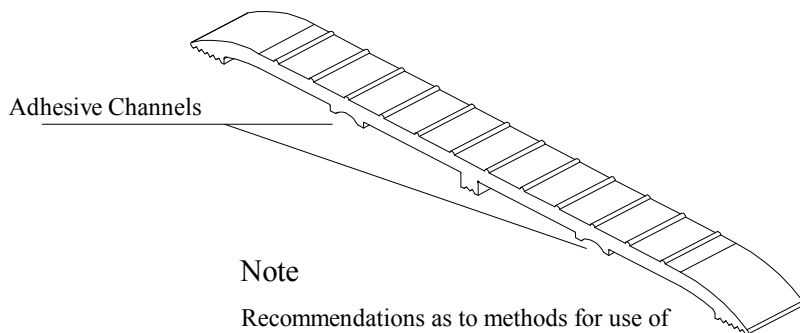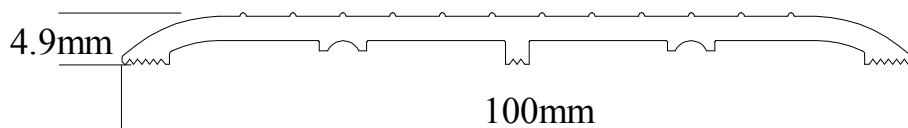

Note

Recommendations as to methods for use of materials and construction details are based on the experience and knowledge of Norsound and are given in good faith as a general guide and service to designers, contractors and manufacturers. Norsound reserves the right to make alterations or delete any installation detail without prior notice.