

NOR810S

DATASHEET

The NOR810S is a compact alternative to the NOR810.


- BS 476 Part 20:22 up to 60 minutes.
- BS EN 1191:2000 1,000,000 cycle test evidence available.

This automatic drop down seal has a light-weight, fully-adjustable operating mechanism incorporating a self-leveling action once it contacts the threshold.


The NOR810S provides excellent acoustic performance, it also provides a barrier to both drafts and energy loss.

This high-performance product is extremely durable having undergone Class 8, Severe Duty BS EN 1191:2000 opening / closing test achieving 1,000,000 cycles.

The seal was partnered in this test with the NOR710 which also carries similar certification.

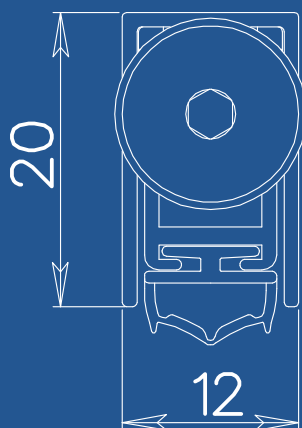

NORSOUND

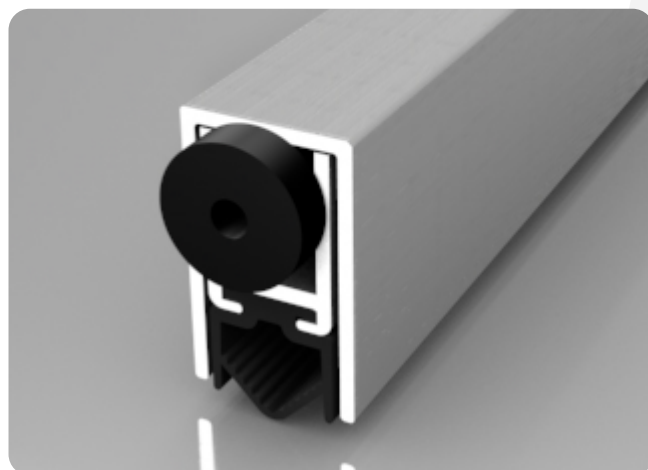

KEY BENEFITS

- 1,000,000 cycle tests to BS EN 1191:2000
- Light-weight operation
- Fully tested in FD30 and FD60 doorsets
- Unobtrusive (fully mortised)

FITMENT LOCATION

Single swing doors

MIN/MAX GAP SIZE

1mm - 12mm

SEAL MATERIAL

PVC rubber co-extruded seal in aluminium carrier and body

FIXING

Rout-in, screw fix

STANDARD LENGTHS

330mm, 430mm, 530mm, 630mm, 830mm, 830mm, 930mm, 1030mm, 1130mm, 1230mm

MAXIMUM CUT BACK

330mm - 430mm: 50mm max cut back
530mm upwards: 150mm max cut back

COLOURS

Holder: SA aluminium
Seal: Black