




ALLURE

ALLURE RANGE

Laminate the imagination



Lars
Contzen
Contzen



The Perform Panel **Allure Range** is more than just a decorative wall panel, it is a statement of **Aspiration, Luxury and Interior Design**

The Allure Range is an exclusive range of laminate decors and colours providing a selection of decorative wall panels which are versatile, robust, practical, modern and suitable for various internal wall applications within both domestic and commercial environments.

As the unique alternative to ceramic tiles, it offers floor to ceiling moisture protection, simple installation and virtually no maintenance. Perform Panel does not require grouting, suffer from unsightly

discolouration and it is easier and quicker to keep wall areas hygienically clean.

With a range of modern and fashionable decors, colours and trim finishes to suit, Perform Panel is traditionally utilised within bathroom, shower or washroom environments.

The Allure Range realises the potential for a decorative wall panel to be the centre-piece of fashion and design within any room.

Laminate the imagination...




PURE IDENTITY

-  Easily Installed
-  Cost Effective
-  Waterproof
-  Hygienic

contemporary



Standard Colours



0901 Black

9417 White

Colours shown match actual colours as closely as the printing process allows.



MICRO




aspiration



Standard Colours



0901 Black



9417 White



10542 Platinum



9429 Zest



9450 Aqua



0300 Fire



0798 Plum

Colours shown match actual colours as closely as the printing process allows.



CUBIX

-  Easily Installed
-  Cost Effective
-  Waterproof
-  Hygienic


interior design



Standard Colours



0901 Black



9417 White



10542 Platinum



9429 Zest



9450 Aqua



0300 Fire



0798 Plum

Colours shown match actual colours as closely as the printing process allows.



WHISPERING GRASS

-  Easily Installed
-  Cost Effective
-  Waterproof
-  Hygienic

luxury



Standard Colours



0901 Black

9417 White

10542 Platinum

9429 Zest

9450 Aqua

0300 Fire

0520 Cappuccine

0798 Plum

1851 Metallic

Colours shown match actual colours as closely as the printing process allows.



COLOUR SELECTOR

Create a unique statement of design

The Perform Panel Allure Range offers a comprehensive choice of alternative colours from the standard range*.

*A minimum quantity, extended lead-time and premium will apply to non-standard colours.

The market leading alternative colour selection will match any colour scheme and transform any domestic or commercial environment into a uniquely created interior design.



Trim Colours



Satin Anodised Aluminium (SAA)



Chrome




White



Black

With unique and market leading production capabilities within the laminate manufacturing industry, all trim options can be powder coated to match any required RAL colour*.

*A minimum quantity, extended lead-time and premium will apply to non-standard colours.

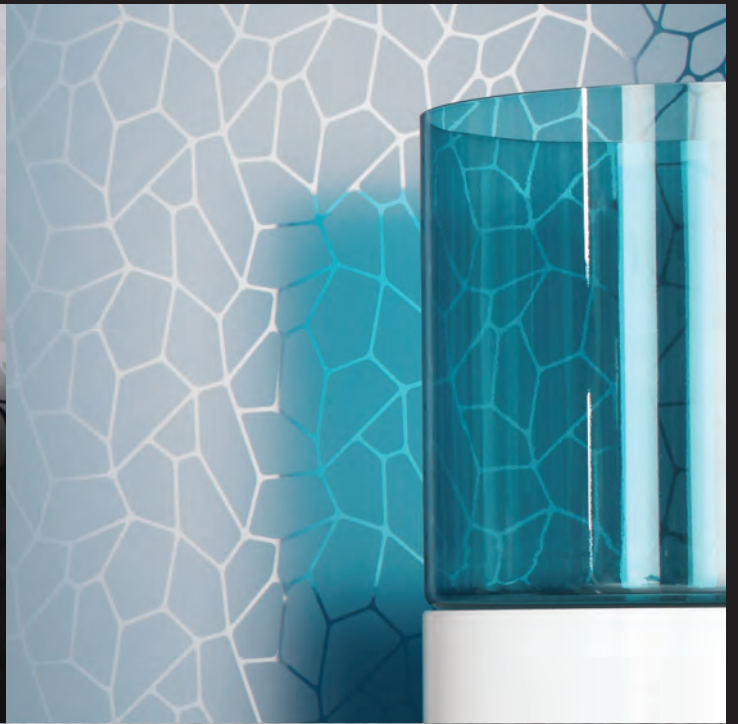

TECHNICAL

Perform Panel is manufactured in a range of decorative high pressure laminates which are specifically designed for exposure to water.

The standard panel dimension is 2400mm x 1200mm x 11mm and can be cut down to smaller dimensions as required. It is available in a range of cores: moisture resistant MDF (as standard), exterior grade MDF or WBP plywood.

The edges of the panels are square and these can be finished in a choice of satin anodised aluminium (SAA), chrome, white or black trims to complement the panel and its surroundings.

For covering larger areas a tongue and groove option is available for all panels within the range.

Trim Options



Bottom Trim provides a flexible finish that protects from moisture penetration, cleaning and wear. Available in white only.

Tongue + Groove Option



Installation Guide

1. Ensure the walls are completely dry and any source of dampness has been treated prior to fitting panels. We recommend the panels are fitted onto plasterboard or any flat, clean and dry surface. The panels can be fitted over existing tiles using suitable adhesive.
2. If using our recommended bottom trim, apply Sealux silicone to the trim and position on the shower tray/bath ensuring that it is plumb. Fix the trim to the wall using appropriate screws.
3. Securely screw fix the internal corner trim into the corner ensuring that it is plumb in both directions.
4. Leave the protective film in place on the face of the panel when cutting to size.
5. When cutting the panels, ensure they are face down when using a jigsaw and face up for a circular saw or hand saw to avoid chipping the laminate.
6. Apply a generous bead of Sealux silicone into the internal corner trim and along the bottom trim.
7. Apply suitable grip adhesive to the back of the panel in a grid form at approximately 300mm squares covering the full area of the panel.
8. Ease the panel into the internal corner trim and onto the bottom trim. Fix into position by applying hand pressure across the full area of the panel. Leave a 3-4mm expansion gap at the top of the panel. If not using a bottom trim allow the same expansion gap at the bottom.
9. Finish off the end panel by fitting an end cap and seal using Sealux silicone.
10. Repeat the same process for adjacent panels and trims.
11. Any cut-outs must always be smoothly radiused to prevent stress cracking on the laminate face. Any inserts must be fully sealed with Sealux sealant.

Tongue + Groove

When installing tongue and groove joints, 10mm is lost from original panel width, e.g.
 $2400\text{mm} \times 1200\text{mm} = 2400\text{mm} \times 1190\text{mm}$

Tongue & groove panels are supplied as standard with a tongue edge and groove edge.

Panels should be fitted "grooved" edge first and the "tongued" edge of the next panel angled in and pushed back into place.

The joint between the two panels must be fully sealed with Sealux silicone. A bead of the Sealux silicone must be applied to the internal gap of the "grooved" edge. A bead of Sealux silicone must also be applied to the "tongued" edge prior to fitting. Any excess Sealux silicone on the face of the panels, once fitted, should be cleaned off.

Accuracy of pattern alignment between panels may vary depending on the scale of the pattern.



Easily Installed



Cost Effective



Waterproof



Hygienic

www.performpanel.com

