


DR11CXTE-350 - Rako Compatible XTE Driver

Description


10W constant current driver with an output of 300mA DC20-25V. Designed to work with Orlight products.



Standards

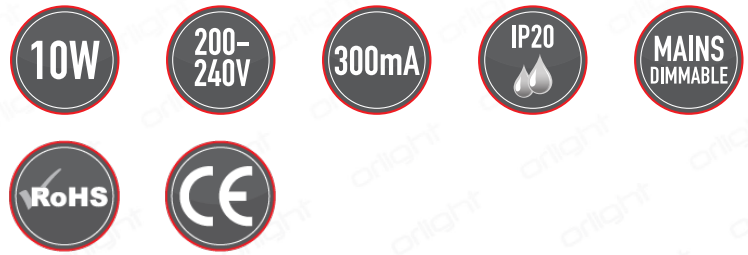

Dimensions

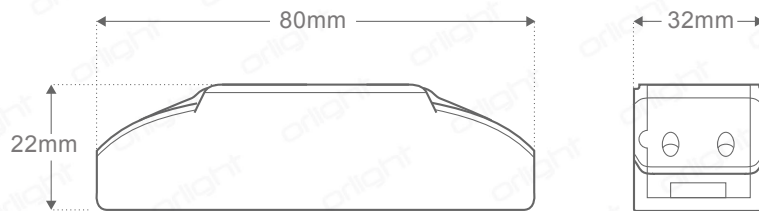

Specifications

Output	Dimming Options	Mains
	Type	Constant Current
	Power	10W Max
	Voltage	20-22V DC
	Current	300mA
	Voltage Tolerance	±5.0%
Input	Voltage Range	200-240VAC
	Frequency Range	50/60Hz
	Power Factor (Typ.)	PF>0.7/230VAC at full load
	Efficiency (Typ.)	85%
Protection	Short Circuit	Recovers automatically after fault condition is removed
	Over Load	Above 105% rated output power

Product Coding: Example: DR11CXTE-350

CODE

DR11CXTE-350