

## LINEAR-1000/1500 - Suspended Light




### Description

Suspended linear LED luminaire boasts a lightweight, slimline aluminium body, matt black finish and opal diffuser for wide beam. No visible suspension cables or fixing parts adds to this product's clean and high end look. CRI>90 to ensure superior light quality.

Suspension accessory kit required on order.


### Dimensions

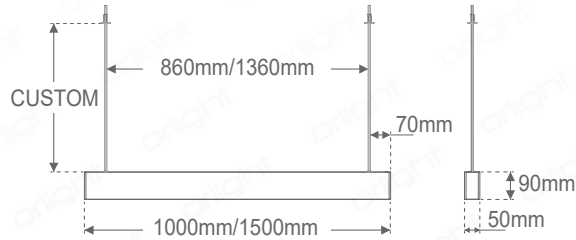

### Standards



### Polar Report

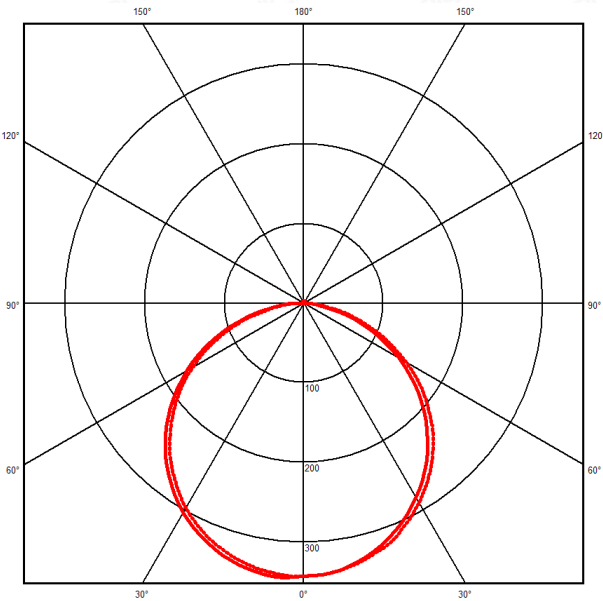

### Specifications

Chipset	Samsung SMD Chip	
Driver	Integral - Tridonic LED Driver	
Dimming Options	Switched	
Power Consumption	23W	
Voltage	220-240V	
Light Distribution	Wide	
Length	1M	1.5M
Colour Temperature	3000K	
Light Output ~	1121lm	1352lm
lm Per Watt ~	49lm/W	59lm/W
CRI	>90	>90
Beam Angle	120°	
Binning	2 step MacAdams Ellipse	
Chip Life TM-21	L70 > 50,000 hours	
Maximum Ambient Temperature	+80°C	
Minimum Ambient Temperature	-40°C	
Install information	Suspended from within the ceiling void	
Cable / Fixing Length	Length available upon request	
IP Rating	IP20	
Weight	3Kg	4.5Kg
Finish	Aluminium - Matt Black - (RAL9005)	

### Colourmetrics

#### 3000K

R1	R2	R3	R4	R5	R6	R7	R8
95	99	98	93	95	97	91	83
R9	R10	R11	R12	R13	R14	R15	
61	96	95	81	96	100	91	

Product Coding: Example: LINEAR-1500-BL-4000K

CODE	LENGTH	COLOUR	COLOUR TEMP
LINEAR	1000 - (1M)	BL (MATT BLACK - RAL9005)	3000K
	1500 - (1.5M)		