


ORLBH28-E - LED Bulkhead - Eyelid Large



Description

This series of surface fixtures feature IP65 rated construction with a textured epoxy finish. The product includes integrated LED power supply with solid state chipset and polycarbonate diffuser for glare reduction. A CRI value of Ra > 80 ensures light quality and eyelid construction provides asymmetric downward light emission. Available in Black, White and bespoke RAL finishes.


Dimensions



Standards



Polar Report

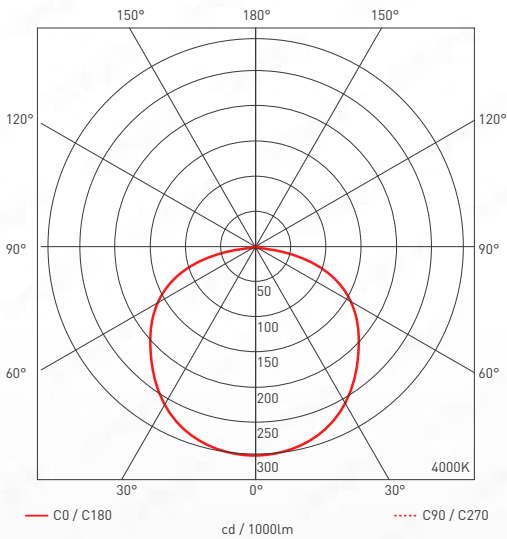

Specifications

Chipset	Epistar 0918
Dimming Options	1-10V; DALI
Power Consumption	13W
Voltage	240V
Colour Temperature	4000K
Light Output ~	585lm
lm Per Watt ~	45lm/W
CRI	>80
Beam Angle	120°
Binning	4 Step MacAdams Ellipse
Chip Life TM-21	L70 > 36,000 hours
IP Rating	65
Touch Temperature (Glass)	34.4°C
Touch Temperature (Body Casing)	31.4°C
Weight	2848g
Finish	Black, White, RAL

Colourmetrics

4000K

R1	R2	R3	R4	R5	R6	R7	R8
83	89	94	84	82	85	88	68
R9	R10	R11	R12	R13	R14	R15	
15	74	83	61	84	97	76	

Product Coding: Example: ORLBH28-E-BL-LED-4000K-EM-DALI

CODE	FINISH	LAMP	COLOUR TEMP	DIMMING OPTION	EMERGENCY OPTION
ORLBH28-E	WH - (WHITE)	LED	4000K	ND - (SWITCHED)	EM
	BL - (BLACK)			1-10V	EM
	RAL - (BESPOKE RAL)			DALI	EM