




ORLCB - Trimless Downlight

Description


Trimless architectural downlight, with aluminium construction and plaster-in mechanism. Minimal 54mm aperture with deep recessed light source serves to minimise glare with 360 degree rotation and tilt facility.




Dimensions Fixed (No Engine)

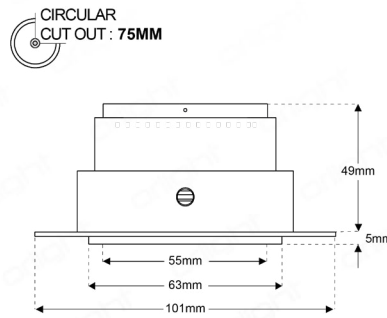


Dimensions Adjustable (No Engine)

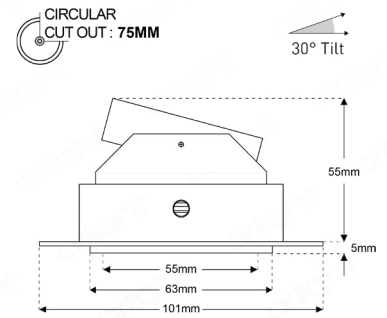

Dimensions w/Engine: DB-R999 range (FIXED)

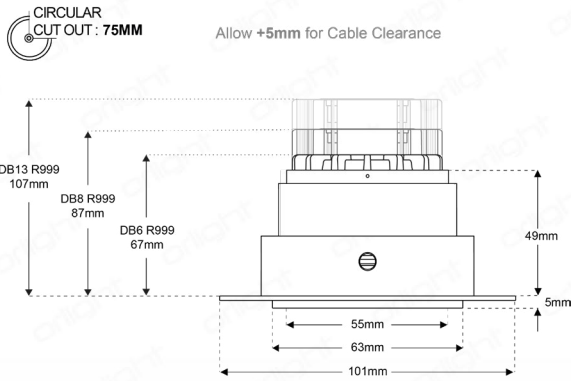

Dimensions w/Engine: DB-R999 range (ADJUSTABLE)

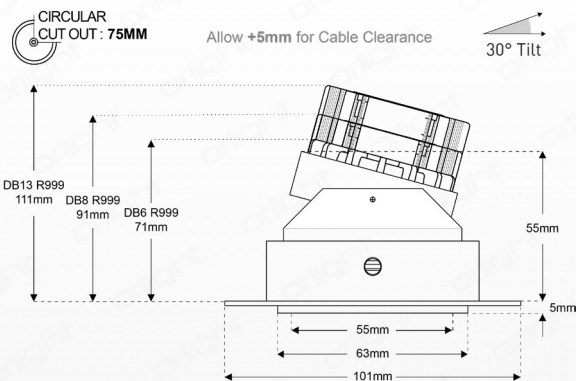

Specifications

Lamps	DB-R999 Range (Solid State)
Construction	Aluminium
Lamp Change	Clip Mechanism
Power Consumption	Variable Light Source
Tilt	30°
Rotation	360°
Cutout	75mm
Anti-Glare	Deep Recess
IP Rating	IP20
Finish	White RAL9016, White RAL9010, Black RAL9005

Product Coding Example: ORLCB-FX-AW-9016

PREFIX	CODE	TILT	FINISH
ORL	CB	(ADJUSTABLE)	AW-9016 (WHITE RAL)
		FX - (FIXED)	AW-9010 (WHITE RAL)
			BL-9005 (BLACK RAL)