



ORLCL - Fixed Minimal Trim Downlight




Description

Fixed architectural downlight with minimal trim to remain discreet in-situ, available in standard or textured with RAL9016 finish.


Recessed light source serves to minimise glare and also available in IP54.

Dimensions

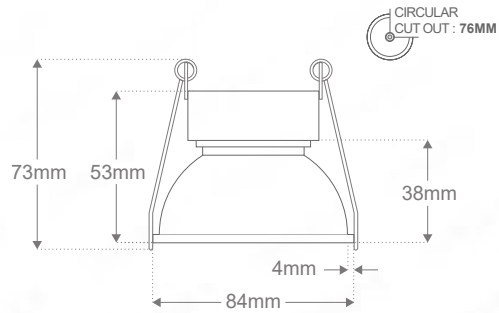


Dimensions w/Lamp: R9-99

Allow +5mm for Cable Clearance

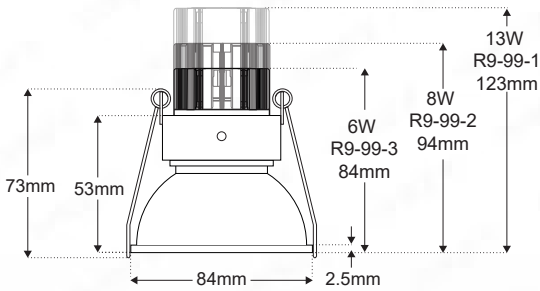

Dimensions w/Lamp: DB4 - DB6 - DB8

Allow +5mm for Cable Clearance

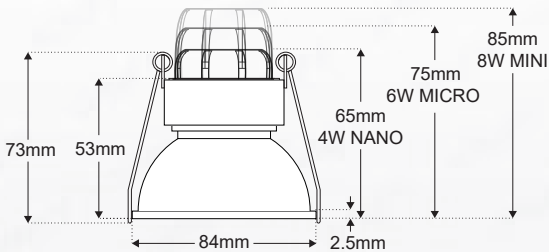

Specifications

Lamps	DIABLO and R9-99 Range
Construction	Aluminium
Lamp Change	Removal of Fixture
Power Consumption	Variable Light Source
Voltage	Max. 240V
Tilt	Fixed
Rotation	Fixed
Cutout	76mm
Anti-Glare	N/A
IP Rating	20; 54
Finish	White Powder Coated (RAL9016); Textured Finish (RAL9016)

Product Coding: Example: ORLCL-WH-IP54

PREFIX

ORL

CODE

CL

FINISH

WH - (WHITE RAL9016)

TF - (TEXTURED FINISH RAL9016)

IP RATED

IP54