




## ORLLH-BL-4000K - External Lighting Post

## Description


Streetscape fixture featuring Aluminium construction to IP65 finished with Epoxy Powder Coat to RAL9004. Integrated Bridgelux LED chipset with Meanwell Power Supply unit. BiPoLe downward light emission with PMMA optic to 120 degrees. Available in 40W & 50W power configurations. Suitable for use in combination with up to 4M mounting post.

## Dimensions

## Standards

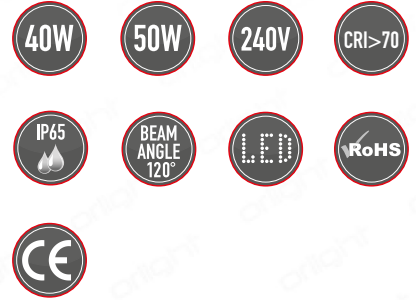

## Polar Report

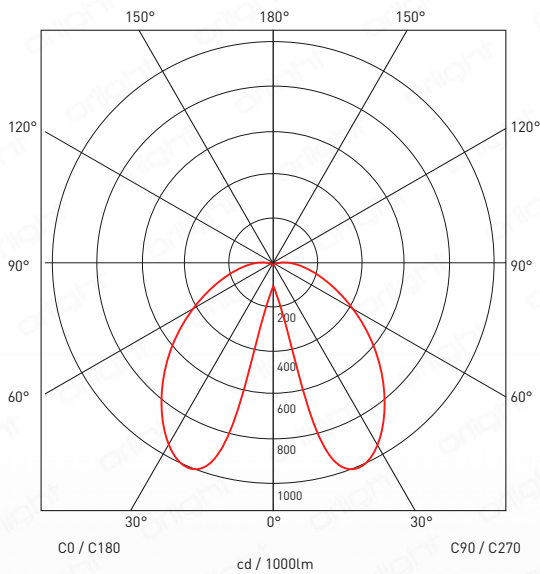

## Specifications

Chipset	Bridgelux		
Dimming Options	Switched		
Voltage	230V		
Power Consumption	50W	40W	50W
Colour Temperature	3000K	4000K	4000K
Light Output ~	3996lm	3472lm	4344lm
lm Per Watt ~	80lm/W	85lm/W	83lm/W
CRI	>70	>70	>70
Beam Angle	120°		
Binning	4 Step MacAdams Ellipse		
Integral Driver	Meanwell		
Chip Life TM-21	L70 > 60,000 hours		
IP Rating	65		
Weight	7500g		
Construction	Aluminium		
Finish	Black - Epoxy Powder Coated (RAL9004)		

## Colourmetrics

3000K

4000K

Product Coding: Example: ORLLH-40W-BL-4000K

CODE

WATTAGE

FINISH

COLOUR TEMP

ORLLH

40W

BL-(RAL9004)

3000K

50W

4000K