


ORLLM732-SS - Mini Display Light

Description


The ORLLM732-SS miniature display light is stylish and decorative. The item features Stainless Steel construction rated to IP65 making this product suitable for both interior and exterior applications. The product is directional and thus perfect for lighting focal features on the wall or within display cabinets. Incorporates an intergrated CREE USA LED white chip set powered at 1W. A low energy, no maintenance solution.

Dimensions

Standards

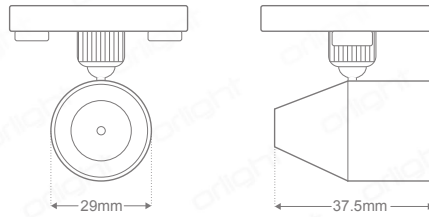

Polar Report

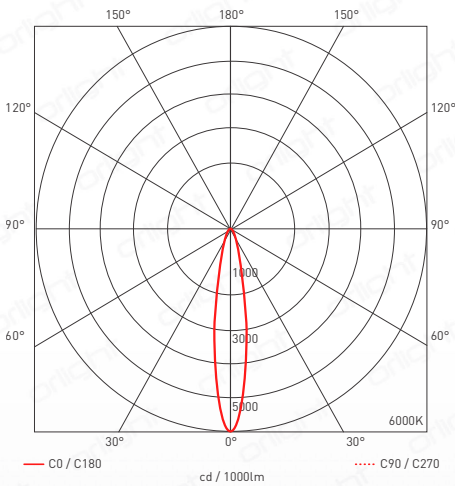

Specifications

Dimming Options	MAINS; 1-10V; DALI
Power Consumption	1W Fixture / 3W Circuit Power
Voltage	3V
Colour Temperature	6000K
Chipset	XPE
Light Output ~	53lm
lm Per Watt ~	53lm/W
CRI	>70
Beam Angle	20°
Binning	4 Step MacAdams Ellipse
Chip Life TM-21	L70 > 60,500 hours
IP Rating	65
Operating Ambient Temp	-20-50°C
Max Surface Operating Temp	65°C
Weight	167g
Finish	316 Marine Grade Stainless Steel

Colourmetrics

6000K

R1	R2	R3	R4	R5	R6	R7	R8
70	75	77	74	71	66	81	62
R9	R10	R11	R12	R13	R14	R15	
0	39	71	42	71	87	65	

Product Coding: Example: ORLLM732-SS-6000K-DALI

*Accessories

CODE	FINISH	COLOUR TEMP	DIMMING OPTION	DRIVERS
ORLLM732	SS - (STAINLESS STEEL)	6000K	ND - (SWITCHED)	ORLRPV350CC - (IP68)
			D - (MAINS DIM)	JOLLY-MD - (IP20)
			1-10V	JOLLY-MINI-1-10V - (IP20)
			DALI	JOLLY-MINI-DALI - (IP20)
			*Refer to Accessories	