

ONLY 6 MM WIDTH

orlight

www.orlight.com | 01707 663 883

MICRO STRIP

Available in bespoke lengths with plug and play connections to drivers.

Integral 2oz copper Orlight heatsink
Increased board thickness enables optimal heat dissipation

Higher strength adhesive liner
Upgraded 3M foam based backing

Superior Orlight purity epoxy
Enhanced formulation that won't degrade with time
and provides better optical properties

High CRI chipset
Available in 6 colours

IP65
Rated as standard



Available in 6 colour temperatures

Super Warm White	Warm White	Warm Neutral White	Neutral White	Neutral Cool White	Cool White
2200K	2400K	2800K	3200K	4000K	6500K

Fully dimmable on:


0-10V protocol Leading/Trailing edge

orlight

MICROSTRIP - TECHNICALLY ENHANCED



Up to 162 Lumens Per Meter Power consumption - 3.4W Per Meter

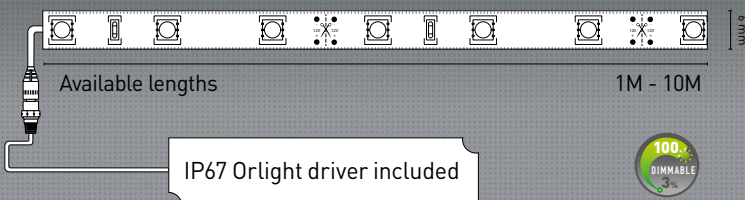

COLOUR	PRODUCT CODE	LUMENS TYPICAL
2200K	ORLMS6012/2200	131 Lm/M
2400K	ORLMS6012/2400	135 Lm/M
2800K	ORLMS6012/2800	143 Lm/M
3200K	ORLMS6012/3200	149 Lm/M
4000K	ORLMS6012/4000	155 Lm/M
6500K	ORLMS6012/6500	162 Lm/M

DRIVER	LENGTH	PRODUCT CODE	DRIVER SIZE (LxWxH)
18W	1 - 5 Meters	ORLR601218	140mm x 30mm x 22mm
35W	6 - 10 Meters	ORLR601235	145mm x 40mm x 30mm

DIMMABLE ORLIGHT DRIVERS AVAILABLE UPON REQUEST

