


ORLWP5-LED - Single LED 5FT Weather Pack

Description

Orlight IP65 rated LED weather packs are ideal for back of house areas, car parks, storage areas, warehousing, under canopy, walkways and general industrial use. Featuring a high efficacy Tridonic LED card, body and diffuser constructed from injection moulded Polycarbonate. Supplied with stainless steel clips for added durability. Emergency option available. Do not connect battery supply until 220/240V A.C. supply is permanently fed and lamp fitted. Allow 24 hours charge before running lamp in emergency mode.

Dimensions

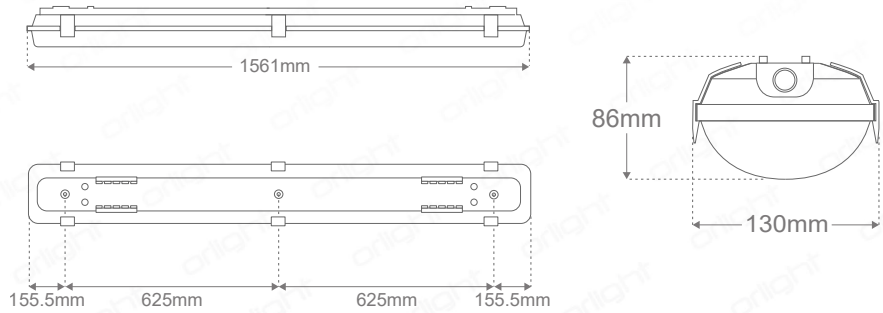

Specification - Standard (Selected configuration will be Integral)

Light Source	Tridonic LED Card	
Dimming Option	Switched; 1-10V; DALI; DSI (Selected configuration will be Integral)	
Current	325mA	375mA
Power Consumption	60W	70W
Voltage	240V	240V
Colour Temperature	4000K	4000K
Light Output	7947lm	9133lm
lm Per Watt	133lm/W	131lm/W
CRI	>80	>80
Binning	3 Step MacAdams Ellipse	
Chip Life TM-21	L70 > 72,000 hours	
TP (a) Rating	65°C	
Ambient Temperature	-40°C ~ 65°C	
IP Rating	IP65	
Weight	2.5kg (standard); 3.5kg (emergency option)	
Material	Polycarbonate / Stainless Steel Clips	

Colourmetrics

4000K



R1	R2	R3	R4	R5	R6	R7	R8
82	89	94	83	82	84	86	66
R9	R10	R11	R12	R13	R14	R15	
11	74	82	62	84	97	76	

Specification - Emergency Mode (Selected configuration will be Integral)

Battery Pack	ACCU-NiCd 4A 55 4 Cell
Light Output~	698lm
Battery Life	> 3 hours

Product Coding: Example: ORLWP5-21W-LED-EM

CODE	WATTAGE	LIGHT SOURCE	CONTROL OPTION	EMERGENCY OPTION
ORLWP5	60W	LED	ND - (SWITCHED)	EM-EMERGENCY
	70W		1-10V	EM-EMERGENCY
DALI			EM-EMERGENCY	
DSI			EM-EMERGENCY	