

ORL-X14 - LED Surface Fixture



Description


IP65 rated fixture with polycarbonate construction and anti-glare diffuser. Integral Tridonic control gear, with CRI>80 to ensure light quality.

Side conduit entry points and twist / lock mechanism diffuser for ease of installation and maintenance.


Standards



Fixing details

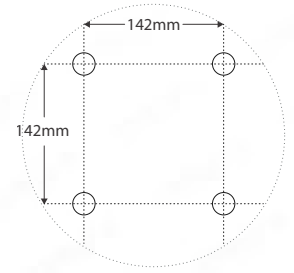


Dimensions

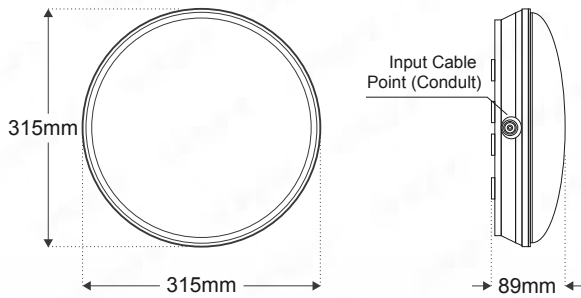

Specifications

Chipset	Solid State LED chipset
Dimming Options	Switched
Power Consumption	14W
Voltage	220 - 240V
Driver	Integral - Tridonic PSU
Colour Temperature	4000K
Light Output ~	1697lm
lm Per Watt ~	121lm/W
CRI	>80
Beam Angle	Diffuse
Binning	3 Step MacAdams Ellipse
Emergency Light Output	151lm
Emergency Details	NED/ 3.6 Ah NiCd
Battery Life	3 hours
IP Rating	65
Weight	990g
Finish	White

Polar Report

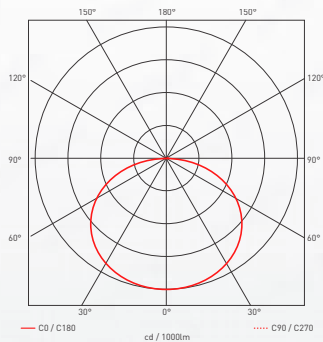

Colourmetrics

4000K

R1	R2	R3	R4	R5	R6	R7	R8
84	90	94	85	84	86	88	69
R9	R10	R11	R12	R13	R14	R15	
18	76	84	65	85	97	78	

Product Coding: Example: ORLX14-WH-4000K-EM

CODE	FINISH	COLOUR TEMP	DIMMING OPTION	EMERGENCY OPTION
ORLX14	WH - (WHITE)	4000K	(SWITCHED)	EM - EMERGENCY