


SABRE - External Lighting Bollard

Description

This IP65 exterior LED bollard emits a solid stream of light from a single side and is great for hospitality and commercial applications. Constructed from aluminium, available in 4000K offering excellent functionality as well as decoration to an external scheme.


Root Fixing Detail

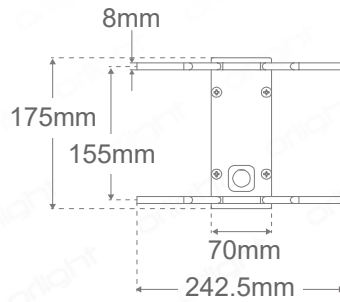

Standards



Dimensions

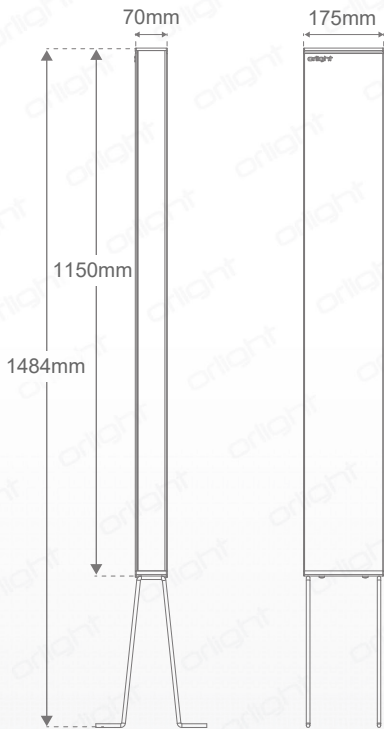

Specifications

Chipset	TRIDONIC SMD Chipset
Dimming Options	Switched; DALI
Power Consumption	26W
Voltage	220-240V
Driver	Integral (supplied with fitting)
Light Distribution	Wide
Colour Temperature	4000K
Light Output ~	1100lm
lm Per Watt ~	44lm/W
CRI	>80
Beam Angle	115°
Binning	2 step MacAdams Ellipse
Chip Life TM-21	L70 > 60,000 hours
Maximum Ambient Temp	+65°C
Minimum Ambient Temp	-40°C
Install information	Root Mounted
IP Rating	IP65
Weight	7Kg
Finish	Epoxy Powder Coat - Grey RAL9023
Maintenance	Removable head unit for access

Colourmetrics

4000K

R1	R2	R3	R4	R5	R6	R7	R8
81	89	95	83	82	85	86	64
R9	R10	R11	R12	R13	R14	R15	
7	74	83	69	83	97	74	

Product Coding: Example: SABRE-1M-4000K

CODE	LENGTH	COLOUR TEMPERATURE
SABRE	1M	4000K