


## SHP115 - Tiltable Solid State Downlight

## Description

The SHP115 adjustable downlight features a 'thin trim' design to appear subtle in-situ. Construction rated to IP20 with Epoxy power coat finish. Incorporating a single SHARP LED light source it ensures perfect uniformity of beam. The CRI value Ra >80 provides light quality assurance & colour consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy. Available in combination with Mains Dimmable, 1-10V and DALI dimmable Power Supplies.




## Dimensions

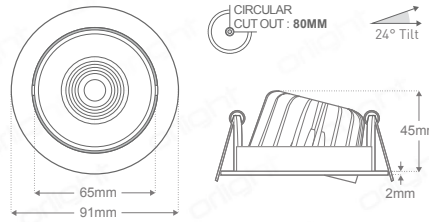

## Standards



## Polar Report

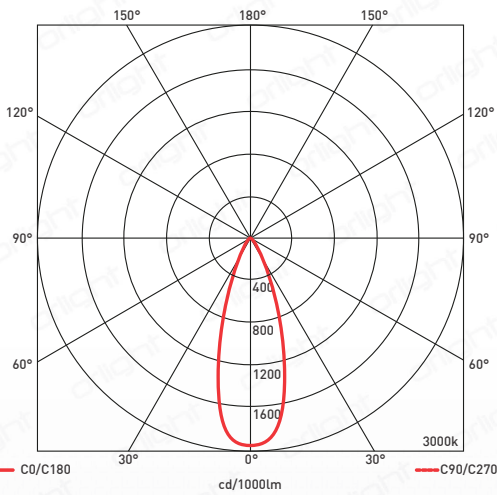

## Specifications

Chipset	SHARP LED	
Dimming Options	MAINS, 1-10V; DALI	
Power Consumption	8W Fixture / 10W Circuit Power	
Voltage	36V	
Colour Temperature	3000K	4000K
Light Output ~	851lm	880lm
lm Per Watt ~	106lm/W	110lm/W
CRI	>80	
Beam Angle	36°	
Binning	2 Step MacAdams Ellipse	
Chip Life TM-21	L70 > 60,00 hours	
IP Rating	20	
Weight	160g	
Finish	White Aluminium	

## Colourmetrics

### 3000K

R1	R2	R3	R4	R5	R6	R7	R8
79	87	95	81	79	84	84	61
R9	R10	R11	R12	R13	R14	R15	
9	71	81	70	80	97	72	

### 4000K

R1	R2	R3	R4	R5	R6	R7	R8
81	84	88	83	81	80	85	69
R9	R10	R11	R12	R13	R14	R15	
16	64	85	67	81	93	74	

Product Coding: Example: SHP-115-WH-3000K-DALI

\*Accessories

CODE	FINISH	COLOUR TEMP	DIMMING OPTION	EMERGENCY OPTION	DRIVERS
SHP-115	WH - (WHITE)	3000K	ND - (SWITCHED)	EM	INCLUDED
		4000K	D - (MAINS DIM)	EM	INCLUDED
			1-10V	EM	JOLLY-MINI-1-10-LC
			DALI	EM	JOLLY-MINI-DALI-LC
*Refer to Accessories					