

# diversity

A balanced range of modern, heavy contract colours for any application

heavy contract

12 colourways






Diversity 110




Diversity 650

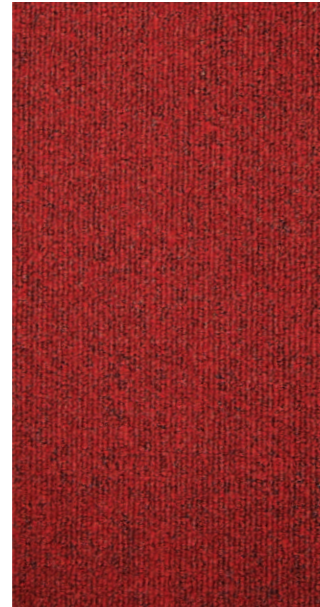

Diversity 210




Diversity 310

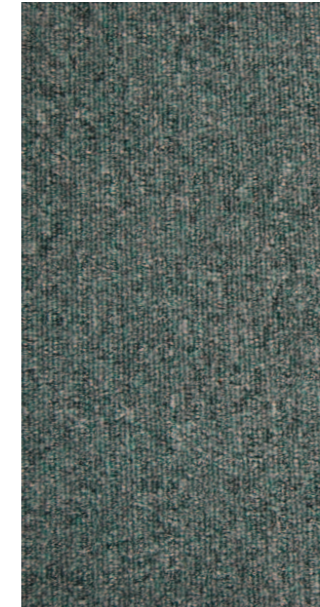


Diversity 510




Diversity 610

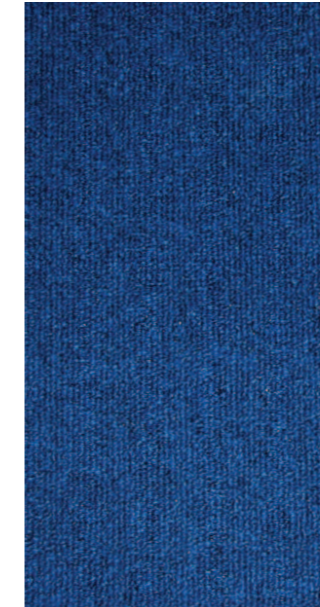


Diversity 620

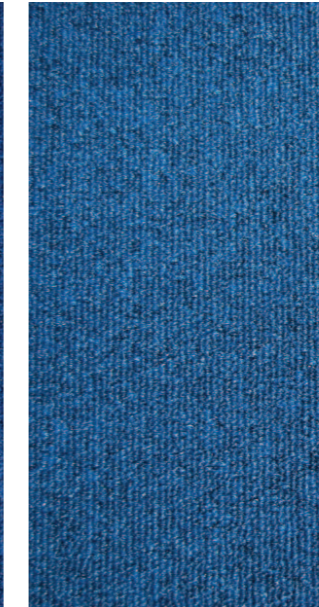


Diversity 630

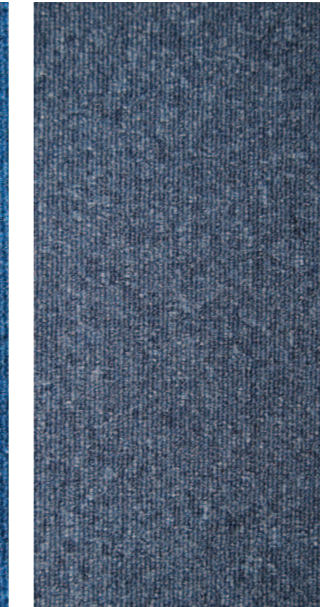

Diversity 640

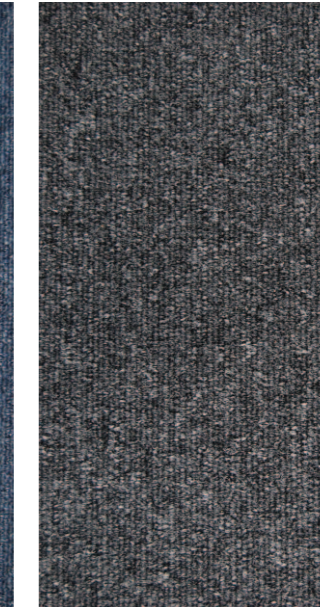

Diversity 810

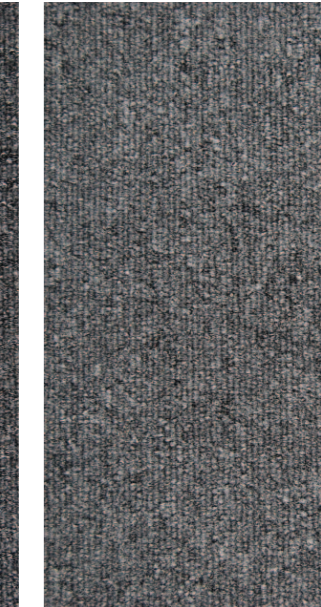

Diversity 820



Diversity 830



**Heavy Contract**

**10 Year Warranty**

**Recyclable - Product can be repurposed at the end of its lifecycle as a non-standard option**

**100% Solution Dyed Nylon**

**Suitable for offices, retail, schools, colleges and leisure**

**Up to 55% recycled content in the bitumen backing**


-  **Style**  
1/10" gauge Tufted Loop Pile Tile
-  **Yarn Construction**  
100% Solution Dyed Nylon
-  **Pile Yarn Weight**  
500 gsm
-  **Pile Height**  
3mm
-  **Pile Density**  
169,300 tufts per m2
-  **Total Weight**  
4270 gsm
-  **Total Thickness**  
5.5mm (Tile)
-  **Backing**  
Bitumen
-  **Dimensions**  
50cm x 50cm
-  **Wear Classification**  
Heavy Contract
-  **Anti-static**  
Suitable for use with computers Less than 2Kv
-  **Colour Fastness**  
To Light (BS EN ISO105-B02) 6  
To Water (BS EN ISO105-E01) 4 - 5  
To Rubbing (BS EN ISO105-X12) 4 - 5
-  **Flammability**  
Floorcoverings tested to BS4790 (Hot Metal Nut Test)  
Euroclass Flammability (BS EN 13501) Bfl-s1
-  **Castor Chair Test**  
BS EN 9852.9  
Suitable for continuous use with castor chairs
-  **Warranty**  
10 Years

**INSTALLATION**  
Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.

**COLOUR**  
For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

**MAINTENANCE**  
It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.





paragon

Farfield Park  
Manvers  
Wath-upon-Dearne  
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839  
F. +44 (0) 1709 763 813  
E. [sales@paragon-carpets.co.uk](mailto:sales@paragon-carpets.co.uk)  
W. [www.paragon-carpets.co.uk](http://www.paragon-carpets.co.uk)