


sirocco

Solid performance and reliability as standard

Suitable for all general office areas

10 colourways




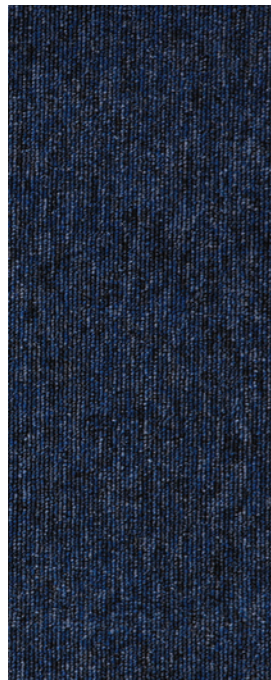


Sirocco Sapphire
(LRV - L26.97 Y4.95)




Sirocco Aegean
(LRV - L34.69 Y8.41)

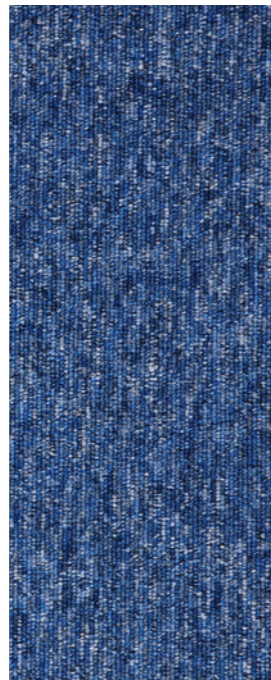


Sirocco Midnight
(LRV - L35.84 Y9.34)

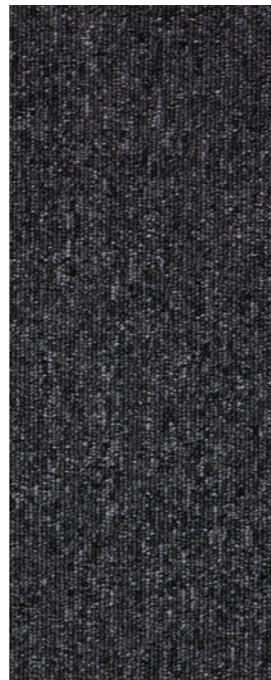


Sirocco Quartz
(LRV - L29.40 Y5.15)

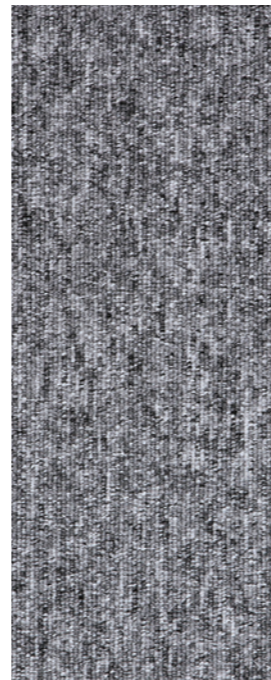


Sirocco Pewter
(LRV - L46.71 Y15.55)

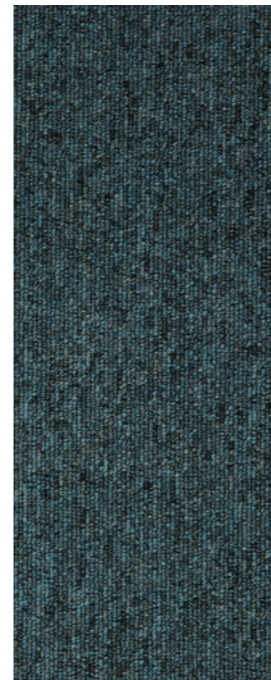


Sirocco Kingfisher
(LRV - L32.84 Y7.37)

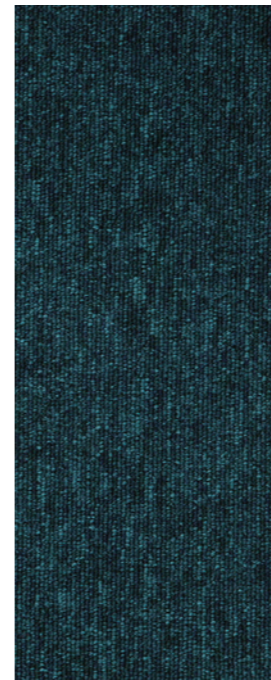


Sirocco Forest
(LRV - L23.93 Y3.76)

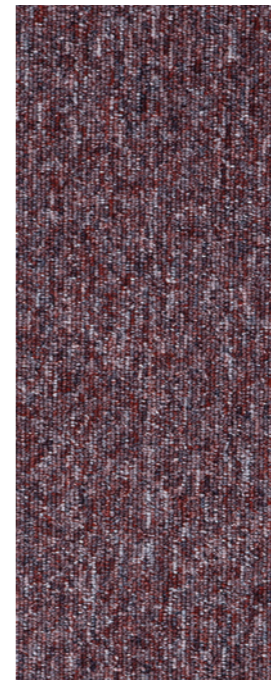

Sirocco Heather
(LRV - L36.59 Y8.81)

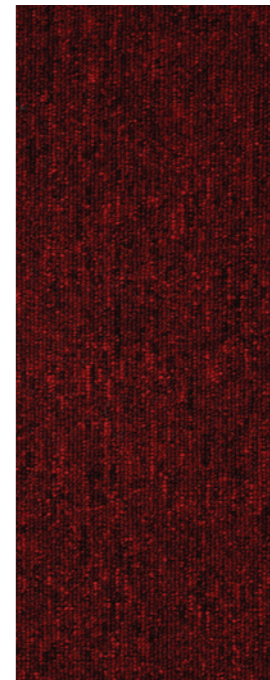

Sirocco Tempest
(LRV - L21.09 Y3.22)

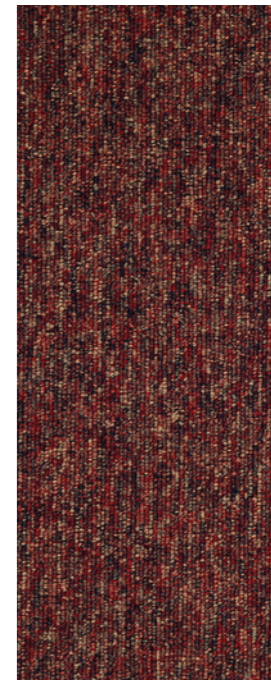

Sirocco Paprika
(LRV - L31.27 Y6.71)



Suitable for all Commercial and Education Markets






Contract Rated

10 Year Warranty

580gsm Pile Yarn Weight

Up to 50% recycled content in the bitumen backing

-  **Style**
Tufted Loop Pile 1/10" gauge
-  **Yarn Construction**
100% Polypropylene
-  **Pile Yarn Weight**
580 gsm
-  **Pile Height**
3.5mm
-  **Total Weight**
4360 gsm
-  **Total Thickness**
6.5mm
-  **Backing**
Bitumen
-  **Dimensions**
50cm x 50cm
-  **Wear Classification**
Contract Rated

-  **Anti-static**
<2Kv body voltage. Suitable for use with computers
-  **Colour Fastness**
To Light BS EN (ISO105 – B02) Better than 6
To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
To Rubbing BS EN (ISO105 - X12) Wet 4 - 5
Dry 4 - 5
-  **Flammability**
Floorcoverings tested to BS4790 (Hot Metal Nut Test) Low Radius of Char
Euroclass Flammability (BS EN ISO 9239) Bfl-s1
(BS EN ISO 11925-2) Bfl-s1
-  **Castor Chari Test**
Suitable for use with castor chairs
-  **Warranty**
10 Years

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.

 545333 05	 Certificate No BARE22345 Fully accredited with ISO14001	 FM30054 BS EN ISO 9001		
	EN 14041:2004 Product Type Bitumen backed tufted carpet tile Reaction to fire Class Bfl-s1 Slipperiness NPD			
				

paragón

CARPETS

Farfield Park
Manvers
Wath-upon-Dearne
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk

