

# DEBS

DBS.T.D.P.40.840.H.WH



## SPECIFICATION TEXT

TRACK MOUNTED DEBS, DIRECT OVAL LIGHT DISTRIBUTION, POLISHED REFLECTOR OPTIC, LED LIGHT SOURCE, 4000K CCT, HF ELECTRONIC DRIVER. DIE-CAST ALUMINIUM HOUSING FINISHED WHITE. DIMENSIONS: (LXWXH) 145 X 50 X 111MM


## PRODUCT IMAGE




## TECHNICAL DETAILS

- Light Distribution: Direct Oval
- Light Source: LED
- Colour Temperature: 4000K
- Optic: Polished
- Nett luminous flux of luminaire: 4650 lm
- Luminaire efficacy: >116 lm/W
- Colour Rendering Index min.: 80 Ra
- Connected Load: 40W
- Driver: HF electronic
- Ingress Protection: IP20
- Emergency:
- Options: Anti glare Louvre

## DIMENSIONAL DETAIL

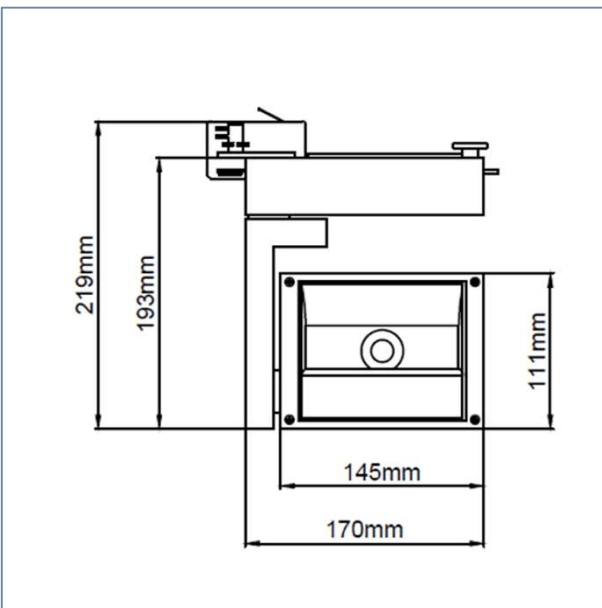

## PHOTOMETRIC CURVE

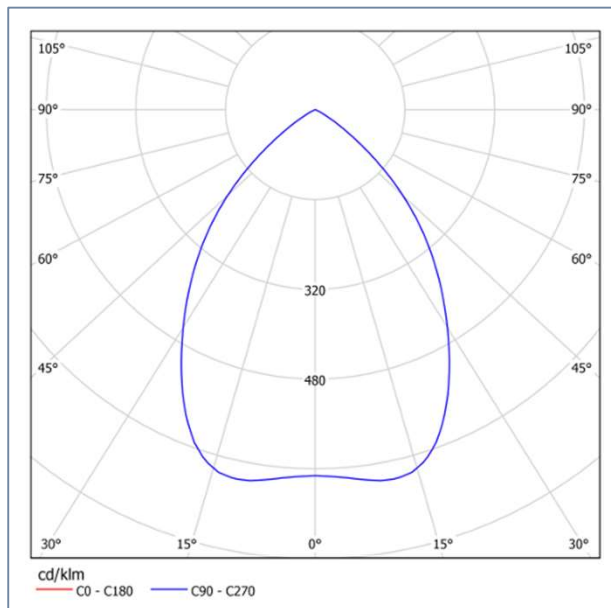

230 V  
50 Hz

