

Philip Payne 2850FL

Description:

LED backlit warning sign .
Semi-secret acrylic legend panel (order separately).
Flush wall mounted.

- Standards:**
- EN60598-2-22
 - EN55015
 - EN50082-1
 - EN60555-2
 - CE marked

Specification:

Total weight: 1.5Kg.
Voltage: 220–240V AC 50/60Hz.
Supply current: 100mA during normal luminaire operation, after inrush current on start up.
Lamps: 2x White LED light strips.
Operating temp: Min 0°C / Max 25°C.
IP Rating: IP30.


Part Numbers Explained:

2850FL-B Where 'B' designates the finish.
See Table 'B' for options & codes.



Table 'B': Finish Options

'B' Code	Finish	'B' Code	Finish
No Suffix	Gloss White supplied as standard.	G	Grey RAL9006.
		K	Black RAL9005.
B	Brass. Polished & lacquered.	R	Satin chrome.
		V	Old penny bronze.
C	Polished chrome.	Z	Special finish: customer specification.
D	Brass made antique.		

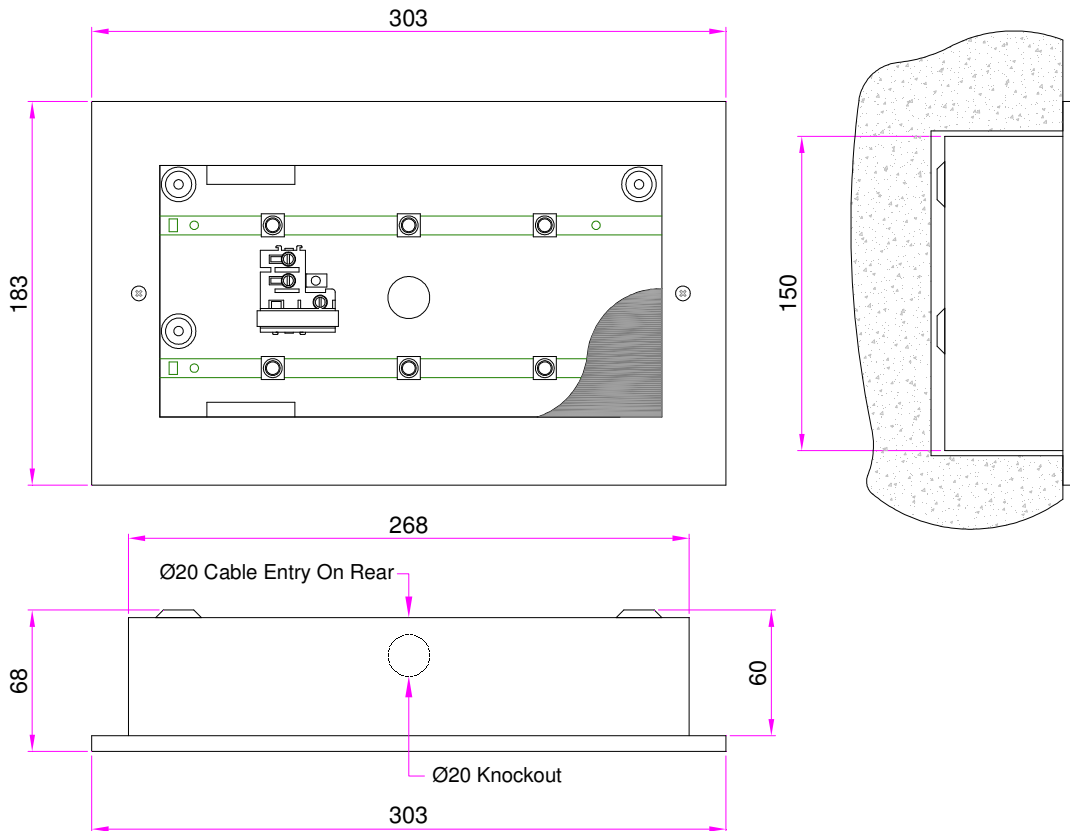

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077

