

**Description:**

Two section warning sign (upper & lower sections separately switched).  
Semi-secret legend panel (order separately).  
Surface wall mounted.

**Standards:**

- EN60598-1
- EN55015
- EN61547
- EN61000-3-2
- CE marked


**Specification:**

Weight: 2.0 Kg.  
Voltage / Current: Dependent upon gear: See Table 'A'.  
Operating Temp: Min 0°C / Max 25°C.  
IP Rating: IP30.

**Part Numbers Explained:**

2874S - A - B


Where: 'A' designates the lamp & gear type. See Table 'A' for options & codes.  
'B' designates the cover finish. See Table 'B' for options & codes.

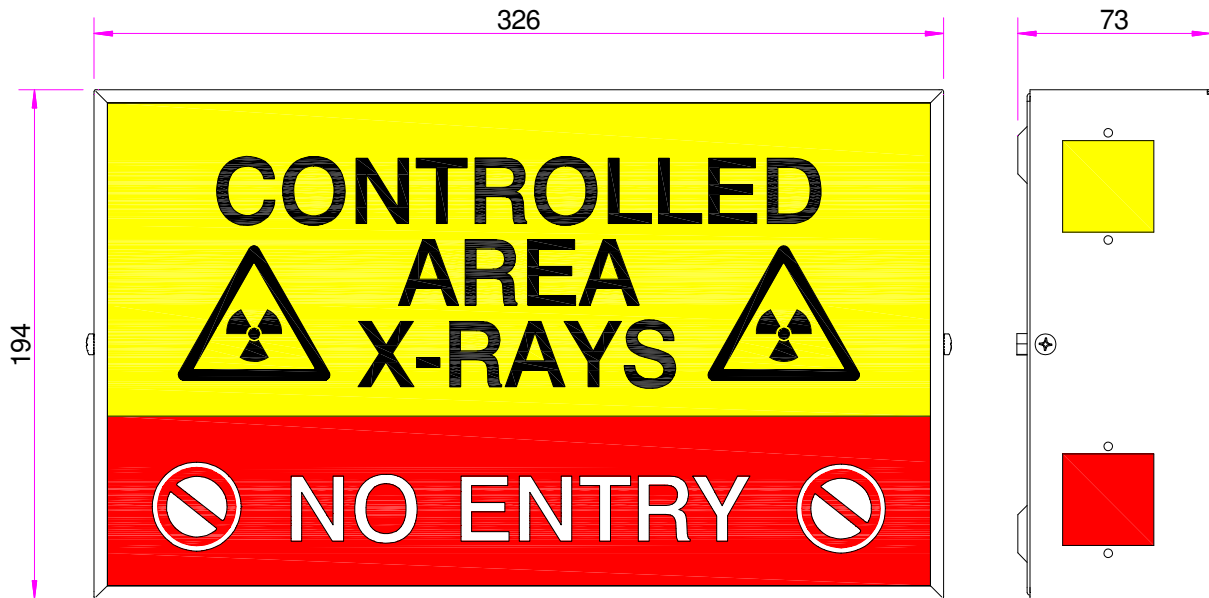

Upper & Lower sections are separately switched.  
The example legend shown is for illustration only.  
The required legend is to be specified on order.

Side lights do not feature on all models.  
See Table 'A'.

Ø20 Cable Entry On Rear

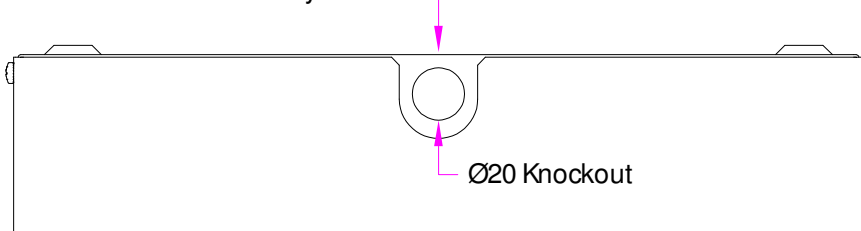

**Table A: Lamp & Gear Options**

'A' Codes	Lamp & Gear Upper Section	Lamp & Gear Lower Section	Additional Features	Supply Current*
B	8W T5 HF gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	None	<250mA
BB	8W T5 HF gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	Lower section sounder	<300mA
BL	8W T5 HF gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	Side lights	<250mA
BLB	8W T5 HF gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	Side lights & lower section sounder	<300mA
F	8W T5 HF gear: 220-240V AC 50/60Hz	8W T5 HF gear: 220-240V AC 50/60Hz	None	<200mA
FB	8W T5 HF gear: 220-240V AC 50/60Hz	8W T5 HF gear: 220-240V AC 50/60Hz	Lower section sounder	<250mA
FL	8W T5 HF gear: 220-240V AC 50/60Hz	8W T5 HF gear: 220-240V AC 50/60Hz	Side lights	<200mA
FLB	8W T5 HF gear: 220-240V AC 50/60Hz	8W T5 HF gear: 220-240V AC 50/60Hz	Side lights & lower section sounder	<250mA
IL	3W LED light strip & 12-24V DC LED Driver	3W LED light strip & 12-24V DC LED Driver	None	<700mA
ILL	3W LED light strip & 12-24V DC LED Driver	3W LED light strip & 12-24V DC LED Driver	Side lights	<700mA
L	3W LED light strip & driver 220-240V AC 50/60Hz	3W LED light strip & driver 220-240V AC 50/60Hz	None	<200mA
LL	3W LED light strip & driver 220-240V AC 50/60Hz	3W LED light strip & driver 220-240V AC 50/60Hz	Side lights	<200mA
P	2 x 7W TC-S HF Gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	None	<300mA
PL	2 x 7W TC-S HF Gear: 220-240V AC 50/60Hz	2 x 15W SBC 220-240V AC 50Hz	Side lights	<300mA
T	2 x 15W SBC 220-240V AC 50Hz	2 x 15W SBC 220-240V AC 50Hz	None	<300mA
TL	2 x 15W SBC 220-240V AC 50Hz	2 x 15W SBC 220-240V AC 50Hz	Side lights	<300mA

\*Supply current during normal luminaire operation, after inrush current on start up.

**Table B: Finish Options**

'B' Codes	Finish	'B' Codes	Finish
No Suffix	Gloss white as standard.	K	Black RAL9005.
B	Brass. Polished & lacquered.	R	Satin chrome.
C	Polished chrome.	V	Old penny bronze.
D	Brass made antique.	Z	Special finish: customer specification.
G	Grey RAL9006.		

## Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC  
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384  
Fax: 0121 711 2469

E-mail: [mail@philippayne.co.uk](mailto:mail@philippayne.co.uk)  
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001  
FM55077