

**Philip**

**Payne**

**2875F RANGE**

**Description:**

Single section warning sign.  
Semi-secret legend panel (order separately).  
Flush wall mounted.

**Standards:**

- EN60598-1
- EN55015
- EN61547
- EN61000-3-2
- CE marked



**Specification:**

Weight: 2.0 Kg.  
Voltage / Current: Dependent upon gear: See Table 'A'.  
Operating Temp: Min 0°C / Max 25°C.  
IP Rating: IP30.

**Part Numbers Explained:**

2875F - A - B

Where: 'A' designates the lamp & gear type. See Table 'A' for options & codes.  
'B' designates the cover finish. See Table 'B' for options & codes.

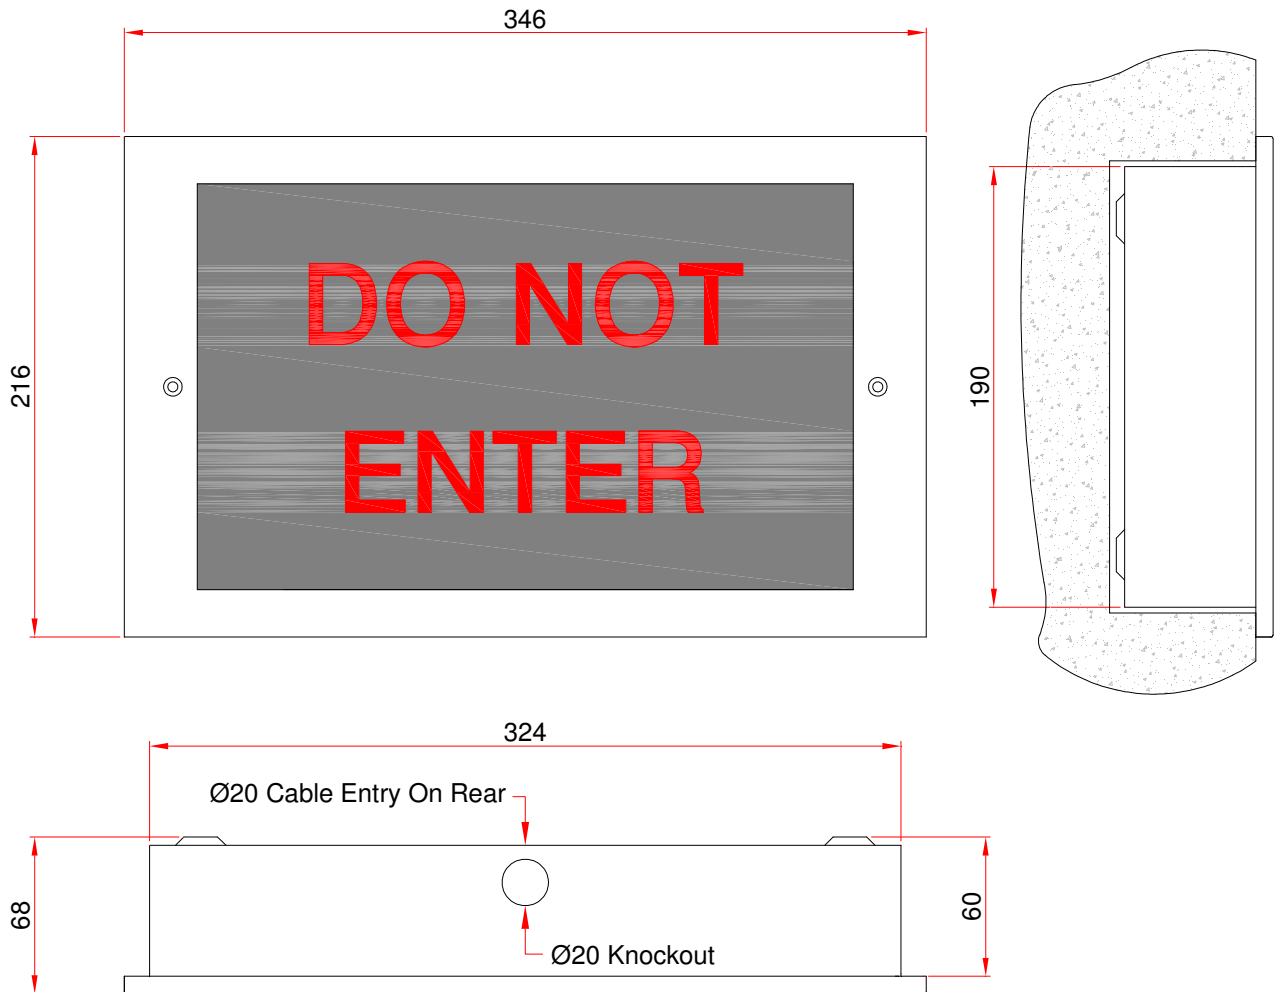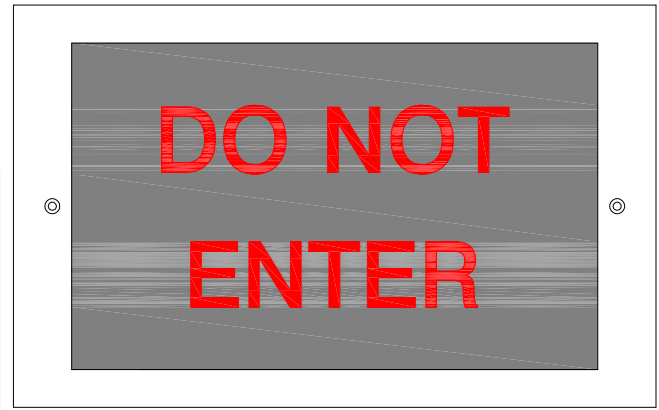

**Table A: Lamp & Gear Options**

'A' Codes	Lamps	Gear	Additional Features	Supply Current*
F	2 x 8W T5	HF gear: 220-240V AC 50/60Hz	None	<200mA
IL	2 x 3W LED light strip	LED Driver : 12-24V DC	None	<400mA
IV24	2 x 8W T5	AC/DC inverter: 24V	None	<1300mA dependent upon supply voltage
IV50	2 x 8W T5	AC/DC inverter: 50V	None	<1300mA dependent upon supply voltage
IV50	2 x 8W T5	AC/DC inverter: 50V	None	<1300mA dependent upon supply voltage
IV110	2 x 8W T5	AC/DC inverter: 110V	None	<1300mA dependent upon supply voltage
L	2 x 3W LED light strip	LED Driver 220-240V AC 50/60Hz	None	<100mA

\*Supply current during normal luminaire operation, after inrush current on start up.

**Table B: Finish Options**

'B' Codes	Finish	'B' Codes	Finish
No Suffix	Gloss white as standard.	K	Black RAL9005.
B	Brass. Polished & lacquered.	R	Satin chrome.
C	Polished chrome.	V	Old penny bronze.
D	Brass made antique.	Z	Special finish: customer specification.
G	Grey RAL9006.		

**Philip Payne Ltd**

A SUBSIDIARY OF F.W. THORPE PLC  
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384  
Fax: 0121 711 2469

E-mail: [mail@philippayne.co.uk](mailto:mail@philippayne.co.uk)  
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001  
FM55077



2875F\_RANGE\_7