



Description:

LED illuminated warning sign with metal legend frame.
Legend panel to be ordered separately.
Semi-recessed wall or surface wall mounted.

Standards:

- EN60598-2-22
- EN55015
- EN50082-1
- EN60555-2
- CE marked



Specification:

- Total Weight = 1.2 Kg.
- Operating Temp = Min 0°C / Max 25°C.
- IP Rating = IP20.

Part Numbers Explained:

SSS – ARCF – B – LA – F Where:-

- SSS = Sign format. See Table SSS for options & codes.
- ARCF = Range code. No options required.
- B = Body finish. See Table B for options & codes.
- LA = Gear code for Mains LED. No options required.
- F = Frame finish. See Table F for options & codes.

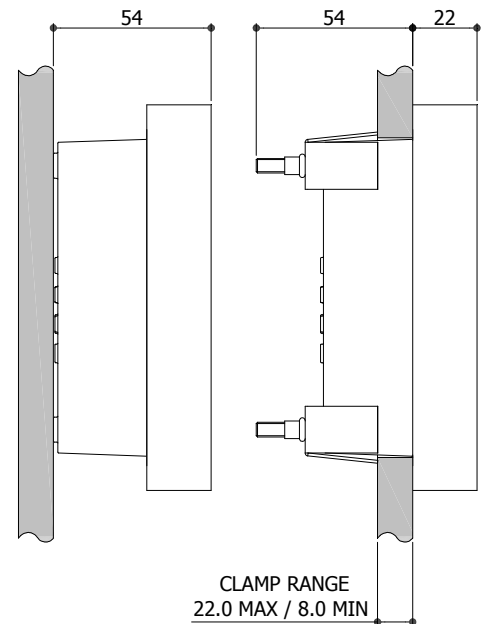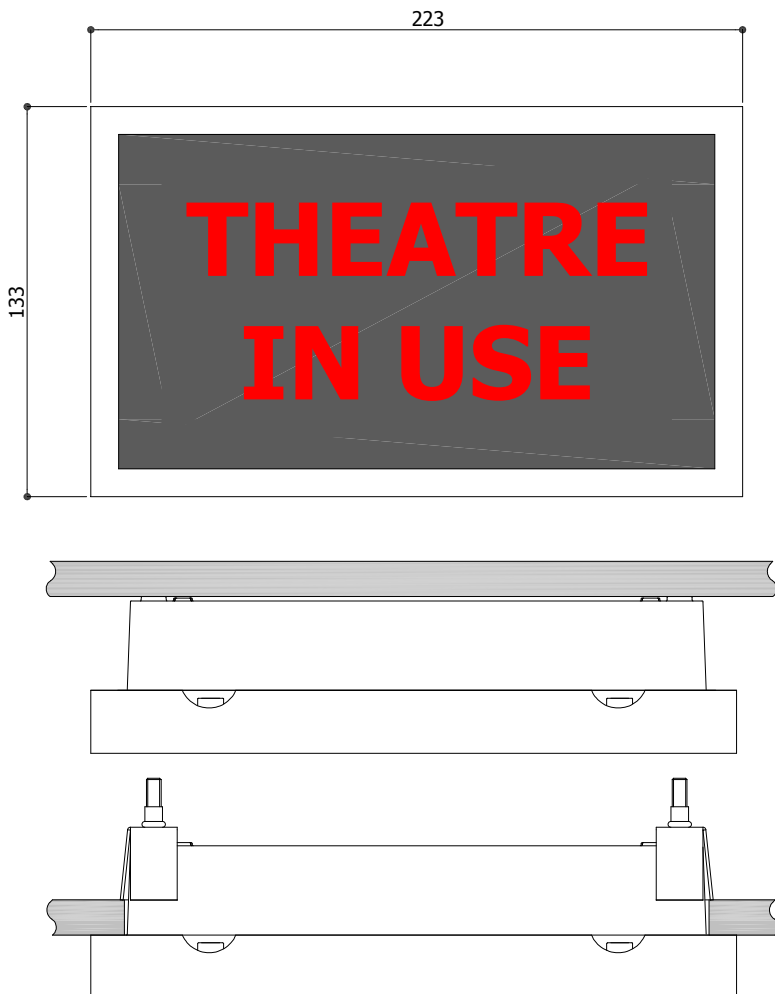

**SEMI RECESSED WALL
OR
SURFACE WALL MOUNTED**



= 200mm x 110mm

Table SSS: Sign Format Options

SSS Code	221	222
Format	Single section.	Two sections – Separately switched.
Gear / Supply	1 x Mains LED driver 220V-240V AC 50/60Hz	2 x Mains LED drivers 220V-240V AC 50/60Hz
LED	1 x Luxeon Rebel	2 x Luxeon Rebel
Supply Current	<100mA	<200mA

Table B: Body Finish Options

B Code	Finish
G	Grey RAL9006.
K	Black RAL9005.
V	Old penny bronze.
W	White RAL9010.
Z	Special finish: Customer specification.

Table F: Frame Finish Options

F Code	Finish
B	Brass. Polished & Lacquered.
C	Polished Chrome.
D	Brass made antique.
G	Grey RAL9006.
K	Black RAL9005.
R	Satin chrome.
V	Old penny bronze.
W	White RAL9010.
Z	Special finish: Customer specification.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077

