

Description:

LED emergency exit sign with integral downlighter.
 Acrylic legend panel with decorative frame (to be ordered separately).
 Surface wall mounted only.

Standards:

- EN60598-2-22
- EN55015
- EN50082-1
- EN60555-2
- CE marked

Specification:

Total Weight: 1 Kg.
 Voltage: Dependent upon gear: See Table 'AA'.
 Current: <100mA (during normal luminaire operation, after inrush current on start up).
 LED: 2 x Philips Luxeon Rebel.
 Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.
 Autotest Versions: Stand alone automatic testing in accordance with IEC62034.
 Operating Temp: Min 0°C / Max 25°C.
 IP Rating: IP20.



Part Numbers Explained:

222ARCP-C-AA-B

Where:-

'C' designates the body finish.
 See Table 'C' for body finish options & codes.

'AA' designates the gear type.
 See Table 'AA' for gear options & codes.

'B' designates the legend trim finish.
 See Table 'B' for legend trim finish options & codes.

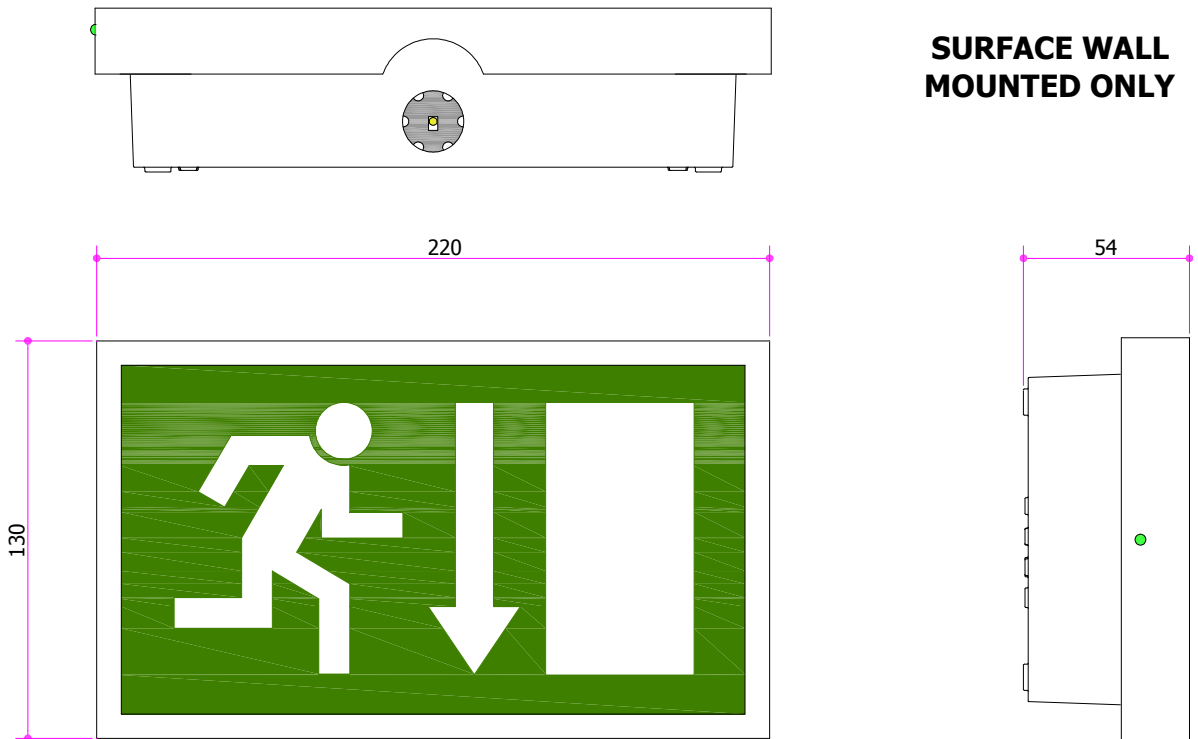


Table 'C': Body Finish Options

'C' Codes	Finish
G	Grey RAL9006.
K	Black RAL9005.
W	White RAL9010: standard finish of PC/ABS material.
Z	Special finish: customer specification.

Table 'AA': Gear / Operation Options

'AA' Codes	Gear / Operation
DL	220V-240V AC 50/60Hz DALI emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.
LA	93-256V DC/AC 50Hz LED driver. For use with central battery or static inverter.
LR	93-256V DC/AC 50Hz LED driver with 230V AC ± 10% 50Hz hold off relay. For use with central battery or static inverter.
LM	220V-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.
PL	230V ± 10% 50/60Hz emergency module with 2 x normally closed potential free contacts & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.
YL	220V-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.

Please Note that the LED downlighter illuminates at the same time as the exit sign.

Table 'B': Legend Trim Finish Options

'B' Codes	Finish
B	Brass. Polished & lacquered.
C	Polished chrome.
D	Brass made antique
G	Grey RAL9006.
K	Black RAL9005.
R	Satin chrome.
W	White RAL9010.
Z	Special finish: customer specification.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077