

Description:


Edge lit emergency exit sign.
Acrylic legend panel with clear polished edges (order separately).
Recessed ceiling mounted.

Standards:

- EN60598-2-22
- EN60598-1
- EN55015
- EN61547
- EN61000-3-2
- CE marked

Specification:

Total Weight: 2 Kg.
Voltage / Current: Dependent upon gear: See Table 'AA'.
Lamp: Philips Luxeon Rebel ES LED Light Strip.
Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.
Autotest Versions: Stand alone automatic testing in accordance with IEC62034.
Operating Temp: Min 0oC / Max 25oC.
IP Rating: IP20.

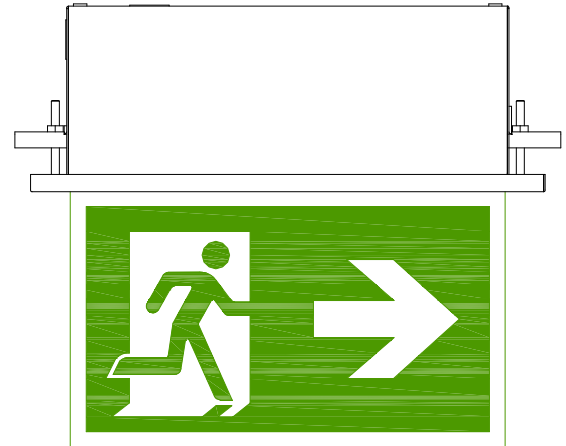

Part Numbers Explained:

220FC - AA - B

Where:-

'AA' designates the lamp & gear type.
See Table 'AA' for options & codes.

'B' designates the trim finish.
See Table 'B' for options & codes.

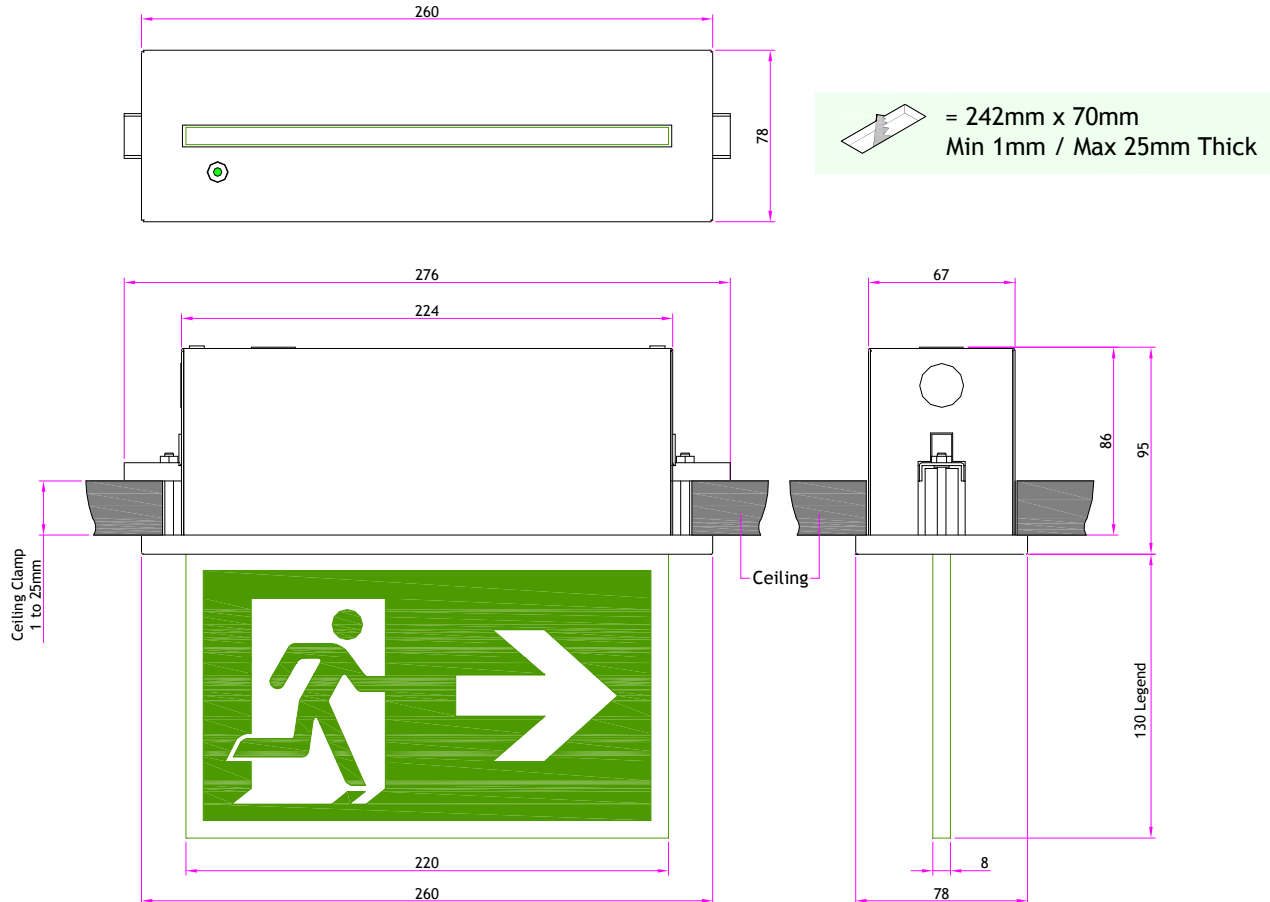


Table 'AA': Gear / Operation**

'AA' Codes	Gear / Operation	Supply Current*
DL	220-240V AC 50/60 Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
LA	220-240V DC/AC 50/60 Hz LED driver for use with central battery / static inverter.	<100mA
LM	220-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA
YL	220-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA

*Supply current during normal luminaire operation, after inrush current on start up.

Table 'B': Finish Options

'B' Codes	Trim Finish
B	Brass. Polished & lacquered.
C	Polished chrome.
D	Brass made antique.
G	Grey RAL9006.
K	Black RAL9005.
R	Satin chrome.
V	Old penny bronze.
W	White RAL9010.
Z	Special finish: customer specification.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384

Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk

Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077



220FC_RANGE_1