



Fabricated from stainless steel or aluminium, the frame is fixed to a floor plate via spigots. The cover houses an IP65 rated gear box, containing terminals for all mains and internal connections (plus data if required)

The Expost has three full height panels, a central 8mm illuminated panel and 2 outer 4mm panels. The central panel is illuminated by a long life LED strip in mains/emergency modes or if preferred emergency only mode.



**Specification**

- **Finishes**
- Stainless: Bead Blasted
- Aluminium: Powder Coated
- Voltage 230v50Hz
- IP65
- Weight 13Kg (max)
- Auto Test/DALI options
- 3Hr Maintained or Non Maintained

**Applications**

- Roof Terraces
- Concourses
- Courtyards
- Public Thoroughfares
- Temporary Exits (Free Standing)
  - Exhibitions
  - School open days
  - Churches

Part Number	
<b>Stainless Steel</b>	
EXPI05LM	3 Hour Maintained
EXPI05YL	AutoTest
EXPI05DL	Dali
<b>Aluminium</b>	
EXAI05LM	3 Hour Maintained
EXAI05YL	AutoTest
EXAI05DL	Dali

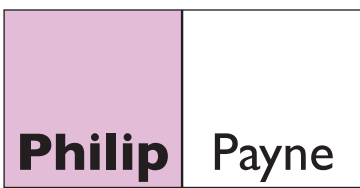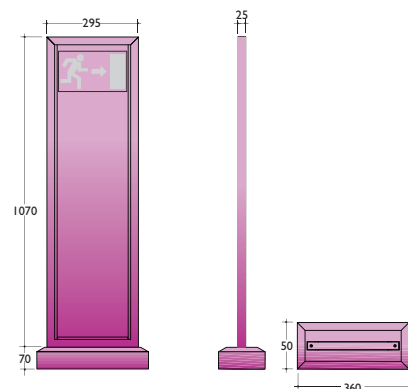

**Philip Payne Ltd**  
 A SUBSIDIARY OF F.W. THORPE PLC  
 Thornhill Road, Lode Lane, Solihull, B91 2HB, England.  
 Tel: 0121 705 2384  
 Fax: 0121 711 2469  
 e-mail: mail@p-payne.co.uk  
 www.p-payne.co.uk  
 Philip Payne Ltd registered in England No. 1361523  
 We reserve the right to alter specifications without prior notice.

