

**Description:**

Edge lit emergency exit sign.  
Acrylic legend panel with clear polished edges (order separately).  
Recessed ceiling mounted or recessed wall flag mounted.

**Standards:**

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- CE marked

**Specification:**

Total Weight: 2.0Kg.  
Voltage / Current: Dependent upon gear: See Table 'AA'.  
DALI Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.  
Autotest Versions: Stand alone automatic testing in accordance with IEC62034.  
Operating Temp: Min 0°C / Max 25°C.  
IP Rating: IP20.





**Part Numbers Explained:**

250MCRV-AA-B

Where:-



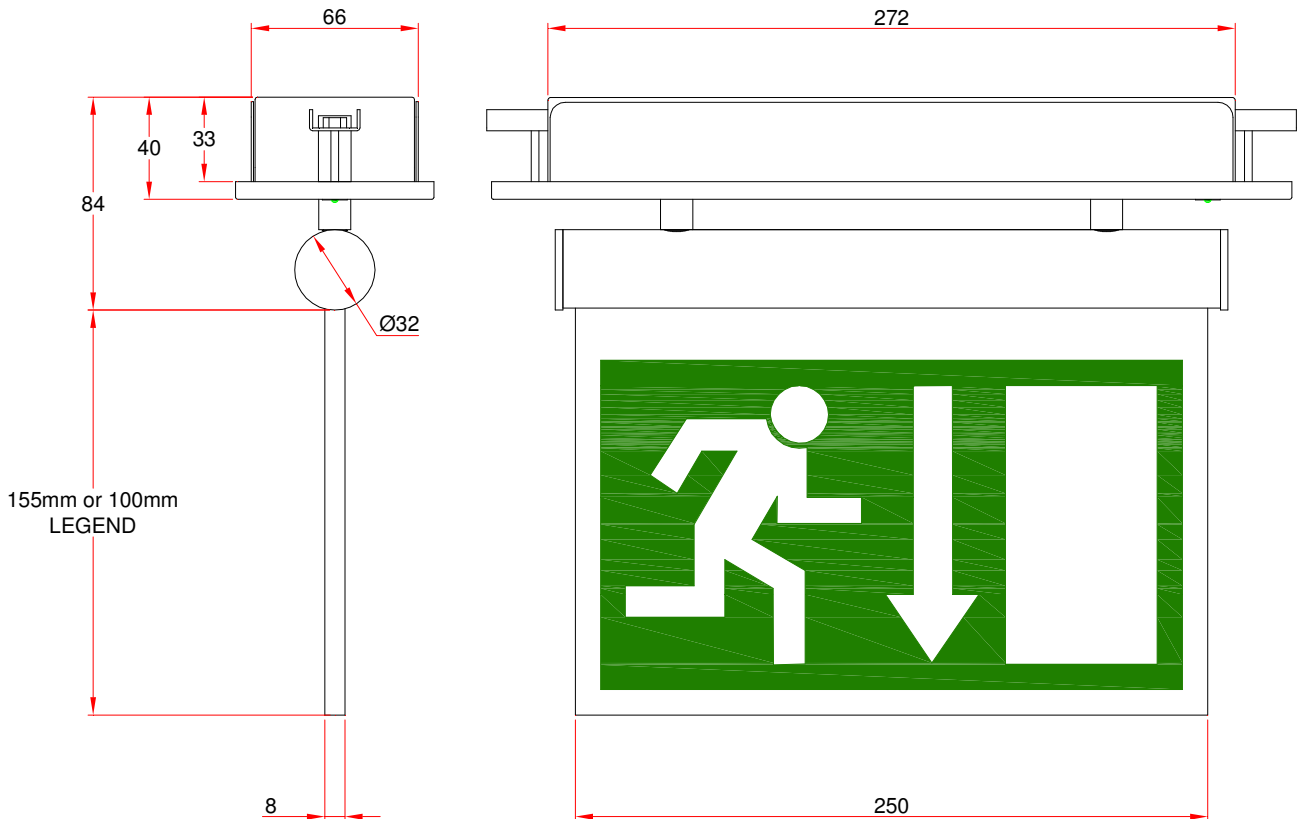

'AA' designates the lamp & gear type.  
See Table 'AA' for options & codes.

'B' designates the finish.  
See Table 'B' for options & codes.



= 285mm x 70mm

**Table 'AA': Gear / Operation**

'AA' Codes	Lamp	Gear / Operation	Supply Current	BSI Kite Mark
<b>DL</b>	1W LED strip	220-240V AC 50/60 Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	
<b>LA</b>	1W LED strip	220-240V DC/AC 50/60 Hz LED driver. For use with static inverter.	<100mA	Not Kite Marked
<b>LE</b>	1W LED strip	220-240V DC/AC 50/60 Hz LED driver. For use with static inverter.	<100mA	
<b>LR</b>	1W LED strip	93-256V DC/AC 50Hz LED driver with 230V AC ± 10% 50Hz hold off relay. For use with central battery or static inverter.	<100mA	Not Kite Marked
<b>LM</b>	1W LED strip	220-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	
<b>PL</b>	1W LED strip	230V AC ± 10% 50/60Hz emergency module with 2 x normally closed potential free contacts & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	Not Kite Marked
<b>YL</b>	1W LED strip	220-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	

**Table 'B': Finish Options**

'B' Codes	Finish
<b>B</b>	Brass. Polished & lacquered.
<b>C</b>	Polished chrome.
<b>D</b>	Brass made antique.
<b>G</b>	Grey RAL9006.
<b>K</b>	Black RAL9005.
<b>R</b>	Satin chrome.
<b>V</b>	Old penny bronze.
<b>W</b>	White RAL9010.
<b>Z</b>	Special finish: customer specification.

**Philip Payne Ltd**

A SUBSIDIARY OF F.W. THORPE PLC  
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384

Fax: 0121 711 2469

E-mail: [mail@philippayne.co.uk](mailto:mail@philippayne.co.uk)

Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001  
FM55077

250MCRV\_RANGE\_5