

Description:

Edge lit emergency exit sign.
Acrylic legend panel with clear polished edges (order separately).
Surface ceiling mounted or surface wall flag mounted.

Standards:

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- CE marked

Specification:

Total Weight: 2.0Kg.

Voltage / Current: Dependent upon gear: See Table 'AA'.

DALI Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.

Autotest Versions: Stand alone automatic testing in accordance with IEC62034.

Operating Temp: Min 0°C / Max 25°C.

IP Rating: IP20.



Part Numbers Explained:


250MCSV-AA-B

Where:-

'AA' designates the lamp & gear type.
See Table 'AA' for options & codes.

'B' designates the finish.
See Table 'B' for options & codes.

CEILING MOUNTED

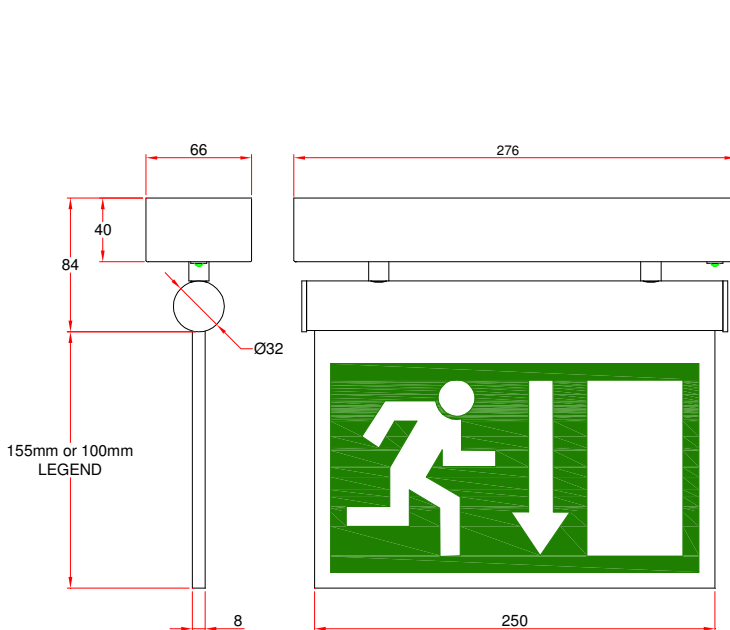

WALL MOUNTED

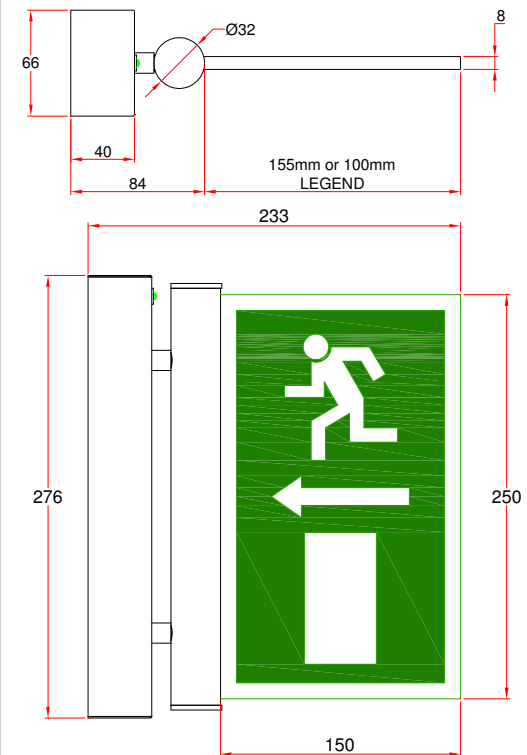


Table 'AA': Gear / Operation





'AA' Codes	Lamp	Gear / Operation	Supply Current	BSI Kite Mark
DL	1W LED strip	220-240V AC 50/60 Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	
LA	1W LED strip	220-240V DC/AC 50/60 Hz LED driver. For use with static inverter.	<100mA	Not Kite Marked
LE	1W LED strip	220-240V DC/AC 50/60 Hz LED driver. For use with static inverter.	<100mA	
LR	1W LED strip	93-256V DC/AC 50Hz LED driver with 230V AC ± 10% 50Hz hold off relay. For use with central battery or static inverter.	<100mA	Not Kite Marked
LM	1W LED strip	220-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	
PL	1W LED strip	230V AC ± 10% 50/60Hz emergency module with 2 x normally closed potential free contacts & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	Not Kite Marked
YL	1W LED strip	220-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation.	<100mA	

Table 'B': Finish Options

'B' Codes	Finish
B	Brass. Polished & lacquered.
C	Polished chrome.
D	Brass made antique.
G	Grey RAL9006.
K	Black RAL9005.
R	Satin chrome.
V	Old penny bronze.
W	White RAL9010.
Z	Special finish: customer specification.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077



250MCSV_RANGE_5