

Description:

Edge lit emergency exit sign.
Acrylic legend panel with clear polished edges (to be ordered separately).
Surface ceiling mounted.
Surface wall mounted with wall bracket kit (to be ordered separately).

Standards:

- EN60598-2-22
- EN55015
- EN50082-1
- EN60555-2
- CE marked

Specification:

Total Weight: 1.1Kg.
Voltage / Current: Dependent upon gear: See Table 'AA'.
Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.
Autotest Versions: Stand alone automatic testing in accordance with IEC62034.
Operating Temp: Min 0°C / Max 25°C.
IP Rating: IP20.

**Part Numbers Explained:**

S7000-AA-B

Where:-
'AA' designates the lamp & gear type.
See Table 'AA' for options & codes.

'B' designates the finish.
See Table 'B' for options & codes.

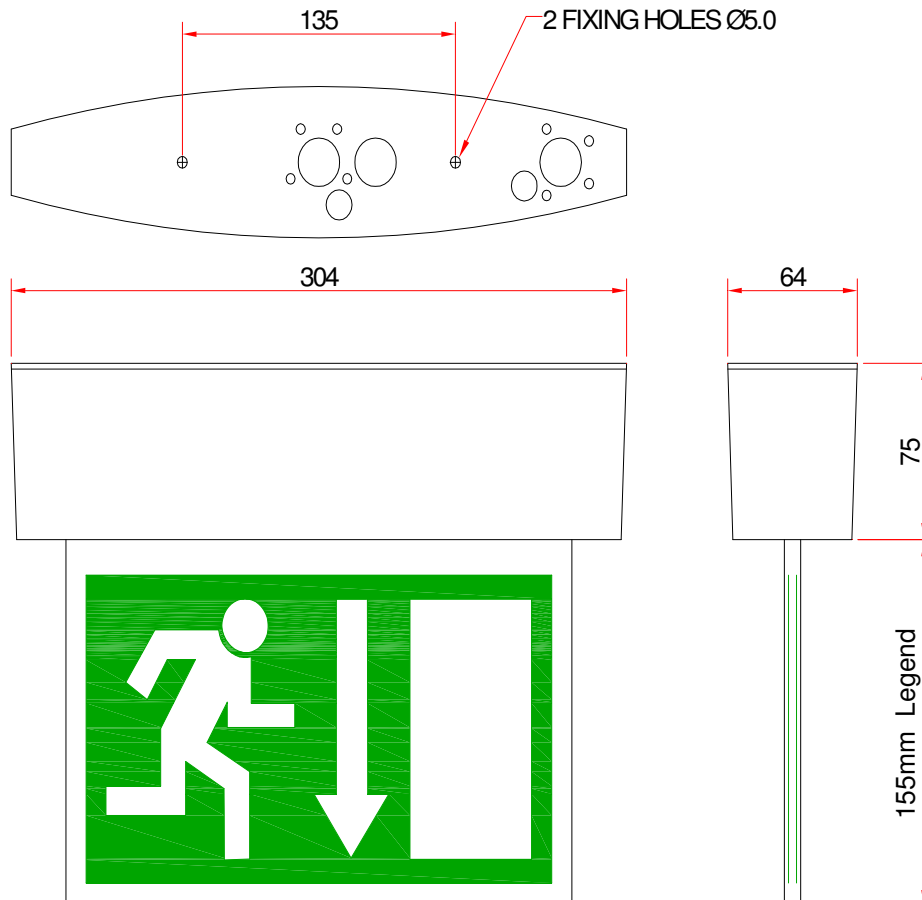


Table 'AA': Gear / Operation

'AA' Codes	Lamp	Gear / Operation	Supply Current
DL	1W LED strip	230V AC ± 10% 50/60Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or Non-maintained operation.	<100mA
LA	1W LED strip	93-256V DC/AC 50Hz LED driver. For use with central battery or static inverter.	<100mA
LE	1W LED strip	220-240V AC 50/60 Hz LED driver for use with central battery / static inverter.	<100mA
LR	1W LED strip	93-256V DC/AC 50Hz LED driver with 230V AC ± 10% 50Hz hold off relay. For use with central battery or static inverter.	<100mA
LM	1W LED strip	230V AC ± 10% 50/60Hz emergency module & self contained 3 hour NiMH battery pack. Maintained or Non-maintained operation.	<100mA
PL	1W LED strip	230V AC ± 10% 50/60Hz maintained emergency module with 2 x normally closed potential free contacts & self contained 3 hour NiMH battery pack.	<100mA
YL	1W LED strip	230V AC ± 10% 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or Non-maintained operation.	<100mA

Table 'B': Finish Options

'B' Codes	Finish
G	Grey RAL9006.
K	Black RAL9005.
W	White RAL9010.
Z	Special finish: customer specification.

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384

Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk

Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523



ISO 9001
FM55077

