

UNI+ Emergency Luminaire AVUA03 LED Range.

Description:


Surface mounted LED emergency luminaire with adjustable lamp head & open area distribution lens.

Standards:

- EN60598-2-22
- EN55015
- EN50082-1
- EN60555-2
- CE marked

Specification:

Total Weight: 2 Kg.
 Lamp: Power LED with open area distribution lens.
 Voltage / Current: Dependant upon gear. See table.
 Dali Versions: Dedicated DALI interface for customer controlled monitoring & reporting. Also, stand alone automatic testing in accordance with IEC62034 if not connected to a DALI system.
 Autotest Versions: Stand alone automatic testing in accordance with IEC62034.
 Operating Temp: Min 0°C / Max 25°C.
 IP Rating: IP30.
 Luminous Flux: Dependant upon gear. See table.

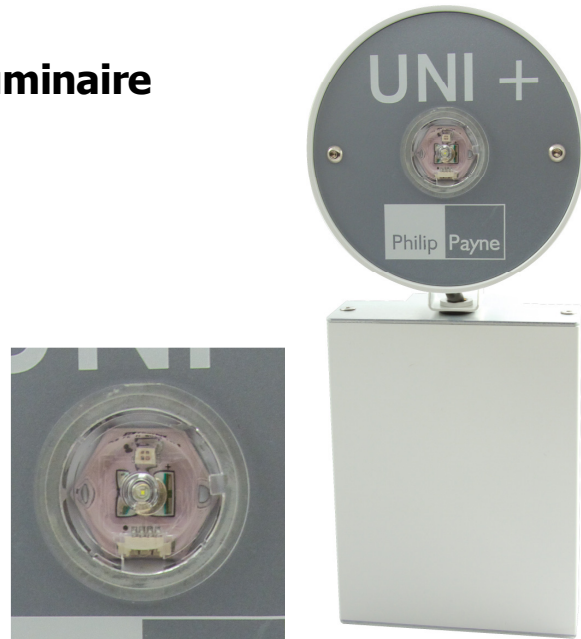


Part Numbers Explained:

AVUA03 - AA - B

Where:-

'AA' designates the gear type. See table for options & 'AA' codes.
 'B' designates the finish. See table for options & 'B' codes.

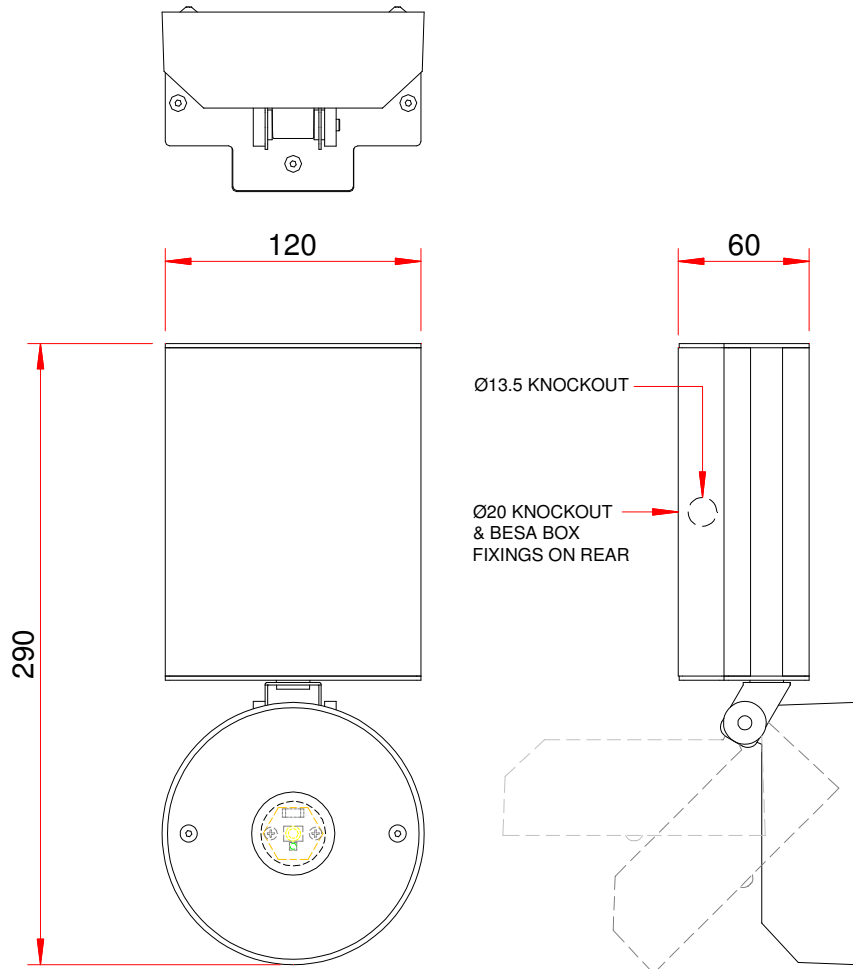

Gear Options

| 'AA' Code | Gear / Operation | Luminous Flux | Supply Current* |
|-----------|--|--|-----------------|
| DL | 220-240V AC 50/60 Hz emergency module with DALI interface & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation. | Emergency Mode = 134 lm Maintained Mode = 84 lm | <100mA |
| LA | 93-256V DC/AC 50Hz LED driver for use with central battery / static inverter. | 140 lm | <100mA |
| LR | 93-256V DC/AC 50Hz LED driver with 230V AC \pm 10% 50Hz hold off relay for use with central battery / static inverter. | 140 lm | <100mA |
| LM | 220-240V AC 50/60Hz emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation. | Emergency Mode = 134 lm Maintained Mode = 84 lm | <100mA |
| PL | 230V AC \pm 10% 50/60Hz emergency module with 2 x normally closed potential free contacts & self contained 3 hour NiMH battery pack. Maintained or non-maintained operation. | Emergency Mode = 134 lm Maintained Mode = 84 lm | <100mA |
| YL | 220-240V AC 50/60Hz Autotest emergency module with self contained 3 hour NiMH battery pack. Maintained or non-maintained operation. | Emergency Mode = 134 lm Maintained Mode = 84 lm | <100mA |

*Supply current during normal luminaire operation, after inrush current on start up.

Finish options

| 'B' Code | Finish |
|----------|--|
| G | Grey RAL9006. |
| K | Black RAL9005. |
| V | Old penny bronze. |
| W | White RAL9010. |
| Z | Special finish. Customer specification to be specified on order. |

Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Lode Lane, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469

E-mail: mail@philippayne.co.uk
Website: <http://www.philippayne.co.uk>

Philip Payne Ltd registered in England No. 1361523

