

Legno

Wood Collection

P O R C E L A I N T I L E S



Legno

Wood Collection

Inspired by clean Scandinavian design, Legno emulates the soft look of wood in a pure, minimalist way. The subtle texture of wood grain comes through in all colours, from a bleached pastel to dramatic, dark hues. Thanks to the wide range of technical features, this range can be used to coordinate indoor and outdoor space, and the anti-slip rating allows for its use poolside and in wet rooms.

7 COLOURS | 1 SIZE | 2 FINISHES | R9 NATURAL | R10 STRUCTURED | V2 VARIATION



Legno
Almond



Legno
Graphite





Legno
Dark Brown



Legno
Fume





Legno
Gray

Colours



Almond



Charcoal



Dark Brown



Fume



Graphite



Gray




Latte


Colours

COLOUR	FINISH	SIZE(MM)
Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	200 X 1200 X 9
Almond Charcoal Dark Brown Fume Graphite Gray Latte	Structured	200 X 1200 X 9

Size Guide (mm)



Special Pieces

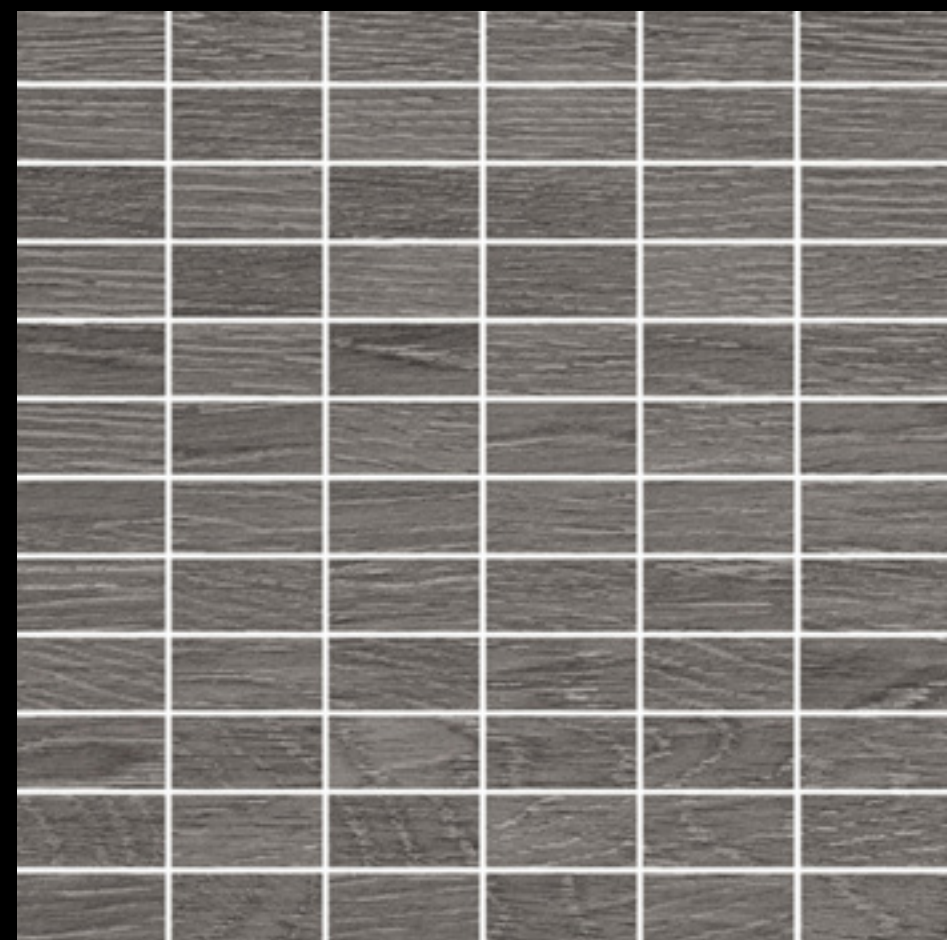

Mosaic



Stick

DETAIL	COLOUR	FINISH	SIZE(MM)
Gradino A	Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	297 X 1200
Mosaic	Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	300 X 300
Skirting Tile	Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	72 X 600
Skirting Tile	Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	40 X 600
Stick	Almond Charcoal Dark Brown Fume Graphite Gray Latte	Natural	300 X 600

Technical Details

PHYSICAL PROPERTIES	STANDARD OF TEST	REQUIRED VALUE	MANUFACTURERS MEAN VALUE
Sides	EN ISO 10545-2	$\pm 0.6\% \text{ MAX } (\pm 2.0 \text{ mm MAX})$	Complies
Thickness	EN ISO 10545-2	$\pm 5.0\% \text{ MAX } (\pm 0.5 \text{ mm MAX})$	Complies
Straightness of sides	EN ISO 10545-2	$\pm 0.5\% \text{ MAX } (\pm 1.5 \text{ mm MAX})$	Complies
Rectangularity	EN ISO 10545-2	$\pm 0.6\% \text{ MAX } (\pm 2.0 \text{ mm MAX})$	Complies
Surface flatness	EN ISO 10545-2	$\pm 0.5\% \text{ MAX } (\pm 2.0 \text{ mm MAX})$	Complies
Water absorption	EN ISO 10545-3	$\leq 0.5\%$	0.03%
Flexion resistance	EN ISO 10545-4	$S \geq 700 \text{ N } (< 7.5 \text{ mm})$ $S \geq 1.300 \text{ N } (> 7.5 \text{ mm})$	$S \geq 2.912 \text{ N}$ $R \geq 50.5 \text{ N/mm}^2$ (197x1200mm Size)
Impact resistance	EN ISO 10545-5	DECLARED VALUE	0.88
Abrasion resistance	EN ISO 10545-6	$\leq 175 \text{ Mm}^3$	124mm ³
Coefficient of linear thermal-expansion	EN ISO 10545-8	—	On Request
Resistance to thermal shocks	EN ISO 10545-9	PASS ACCORDING EN ISO 10545-1	No Damage
Frost resistance	EN ISO 10545-12	PASS ACCORDING EN ISO 10545-1	No Damage
Resistance to chemicals	EN ISO 10545-13	UB MIN.	UA ULA UHA
Resistance to stains	EN ISO 10545-14	DECLARED VALUE	5
Slip resistance	DIN 51130	-	R9 - Natural R10 - Grip



Legno - Almond

P O R C E L A I N T I L E S

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 8731 6787

www.porcelaintiles.co.uk

South London Showroom
88 High Street Wimbledon
London SW19 5EG
020 3141 3337

enquiry@porcelaintiles.co.uk