



Adapter Product Instructions



User Manual

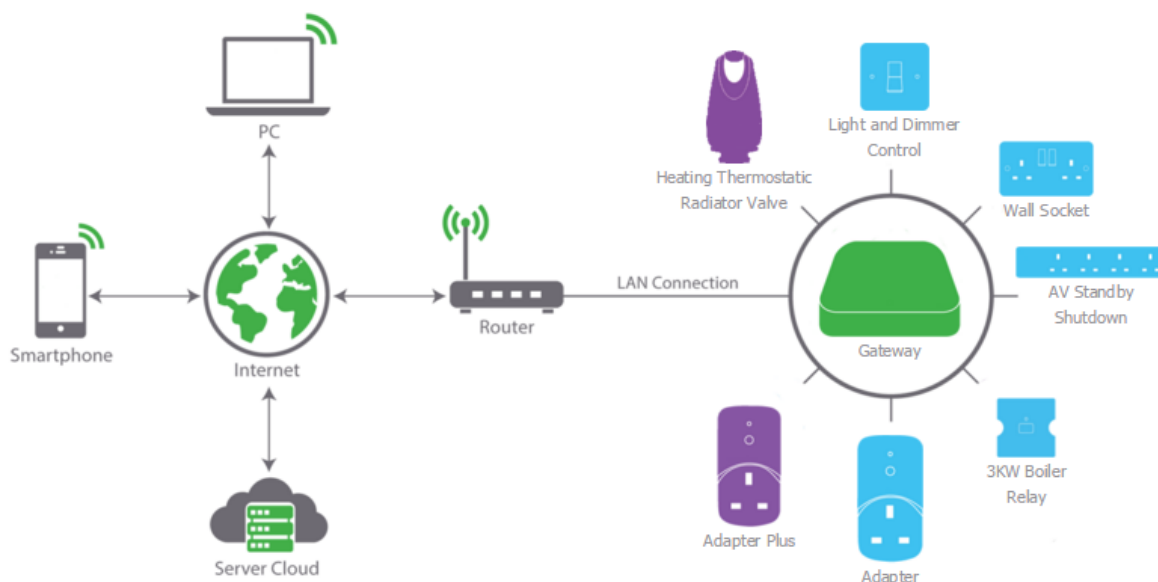

The adapter may be paired either from the app MiHome  on your smart device (Android or Apple IOS) or from a web browser connected via the Gateway.

Pairing via a Browser:

Hold down the button on the front of the housing of the adapter for 5 seconds or more. You should see the red light on the adapter housing start flashing at 1 second intervals.

On the webpage choose Manage Devices, then Pair Device and select the Control Socket followed by Register Device. If pairing is successful, the red light on the adapter should then briefly flash rapidly for a second or so.

You will then be asked to confirm that the pairing was successful or cancel if you did not see the light on the adapter flashing quickly. Once you have confirmed pairing, you should see the device come up on the screen as being paired.

Pairing via the App on your smartphone:

Similarly follow the instructions in the App to select and pair a Control adapter.

You can then view and control your paired device by selecting the Dashboard option on your App or in your browser window.

Specification

Input voltage: 220 - 250V~ 50Hz, 13A, 3kW max. Standard UK mains plug

Power consumption: < 0.3W

Appliance connection: Socket for domestic appliances with a standard UK plug to BS1363

Radio: 433.92MHz, OOK

Range of operation: Typically 25m line-of-sight

The unit complies with all essential requirements for CE marking as per directive 93/98/EEC.

Troubleshooting

1. Ensure that you do not plug your adapters into adjacent sockets in a wall socket or extension lead. There should be several metres distance between individual adapters.
2. Any local source of radio noise may effect operation. This may include poorly regulated fans or other devices running electric motors, noisy power supplies or other low quality electrical and electronic equipment including LED lights.
3. If your attempt to pair an adapter fails please try again. Occasionally the signals between devices may be subject to noise or other outside interference which is common for radio systems of this nature.
4. The range of communication between your Gateway and linked devices will be affected by anything in between that may obscure the signal such as furniture, walls, ceilings, windows, doors etc.

Declaration of Conformity

Model MIHO002 is CE marked in accordance with directive 93/98/EEC.

Caution

Important Note: The adapter can get warm to the touch during normal operation. This is normal and does not affect the operation or lifetime of the device.

The adapter devices are 13amp approved, however it is not recommended to use your Control adapter with any appliance pulling a large current for an extended period, such as a heater or a device with a powerful motor such as a power tool or washing machine.

Please be aware that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

