

DECLARATION OF PERFORMANCE

according Annex III of the Regulation (EU) No 305/2011
amended by Commissions delegated Regulation (EU) No 574/2014

No. GBI P55-1

Unique identification code of the product-type:

**SP Top ^[basic]
Renovierputz
0420**

Intended use/es:

**Designed rendering / plastering mortar used on moist masonry walls
containing water soluble salts**

Manufacturer:

**REMMERS GmbH
Bernhard-Remmers-Straße 13
D-49624 Lönigen
Tel. 0049 / 5432 / 83- 0**

System/s of AVCP:

**System 4
(for internal and external uses, in wall, column, partition and
ceiling finishes)
System 4
(for reaction to fire regulations)**

Harmonised standard:

EN 998-1: 2010

Notified body/ies:

not relevant

Declared performance/s:

Essential characteristics	Performance	System of assessment and verification of constancy of performance	Harmonised Technical specification
Reaction to fire:	class A1	System 4	EN 998-1:2010
Adhesion:	$\geq 0,08 \text{ N/mm}^2$ (fracture pattern B)		
Water absorption:	$\geq 0,3 \text{ kg/m}^2$ after 24 h		
Water vapour permeability:	$\mu \leq 15$		
Thermal conductivity ($\lambda_{10, \text{dry}}$)	$\leq 0,4 \text{ W/(mK)}$ for P = 50 %		
Durability (against freeze-thaw):	Resistant, by use acc. TDS		
Dangerous substances	NPD		

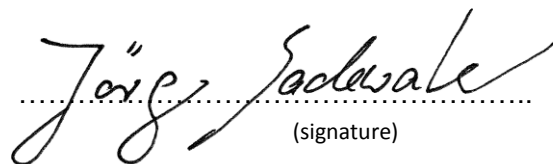
The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Jörg Sadewater, Bereichsleiter F+E - mineralische Baustoffe

Löningen, 01.11.2016

(place and date of issue)


.....
(signature)