

PRODUCT DATA

Decking Strips



DECKING STRIPS

Made from tough fibreglass with anti slip grit top surface. These strips are the ideal solution to help with slippery decking areas. The GRP pultruded strips come complete with pre-drilled holes and screw fixings. Simply lay the strips on top of your decking and screw through the pre-drilled holes into the timber to secure the strips in place. It couldn't be easier.

BENEFITS

- Extremely durable anti slip surface
- Easy to install
- Waterproof and Rot proof
- Pre-drilled for screw fixing (screws included)
- Choice of 3 widths
- Choice of 2 lengths
- Available in different colours
- Suitable for domestic and commercial use

QUICK & EASY INSTALLATION



Rust-Oleum Netherlands B.V.
Braak 1, 4704 RJ
P.O. Box 138, 4700 AC
Roosendaal, The Netherlands
T +31 (0)165 593 636
F +31 (0)165 593 600
info@rust-oleum.eu
www.rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Halen, Belgium
T +32 (0)13 460 200
F +32 (0)13 460 201
info.be@ro-m.com
www.ro-m.com

Rust-Oleum France S.A.S
11, Rue Jules Verne, B.P. 60039
95322 St-Leu-la-Forêt Cedex
France
T +33 (0)1 30 40 00 44
F +33 (0)1 30 40 99 80
info.fr@ro-m.com
www.ro-m.com

Rust-Oleum UK Ltd.
Rotterdam House
116 Quayside
Newcastle
NE1 3DY
United Kingdom
T +44 (0)2476 717 329
F +44 (0)2476 718 930
info@rust-oleum.eu
www.rust-oleum.eu

PRODUCT DATA

Decking Strips

REFERENCE PROJECTS



Rust-Oleum Netherlands B.V.
Braak 1, 4704 RJ
P.O. Box 138, 4700 AC
Roosendaal, The Netherlands
T +31 (0)165 593 636
F +31 (0)165 593 600
info@rust-oleum.eu
www.rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Halen, Belgium
T +32 (0)13 460 200
F +32 (0)13 460 201
info.be@ro-m.com
www.ro-m.com


Rust-Oleum France S.A.S
11, Rue Jules Verne, B.P. 60039
95322 St-Leu-la-Forêt Cedex
France
T +33 (0)1 30 40 00 44
F +33 (0)1 30 40 99 80
info.fr@ro-m.com
www.ro-m.com

Rust-Oleum UK Ltd.
Rotterdam House
116 Quayside
Newcastle
NE1 3DY
United Kingdom
T +44 (0)2476 717 329
F +44 (0)2476 718 930
info@rust-oleum.eu
www.rust-oleum.eu


PRODUCT DATA

Decking Strips

COLOURS AVAILABLE

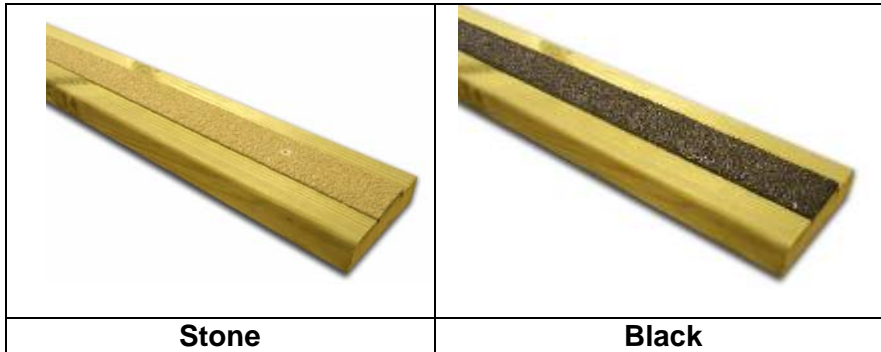

SIZES AVAILABLE

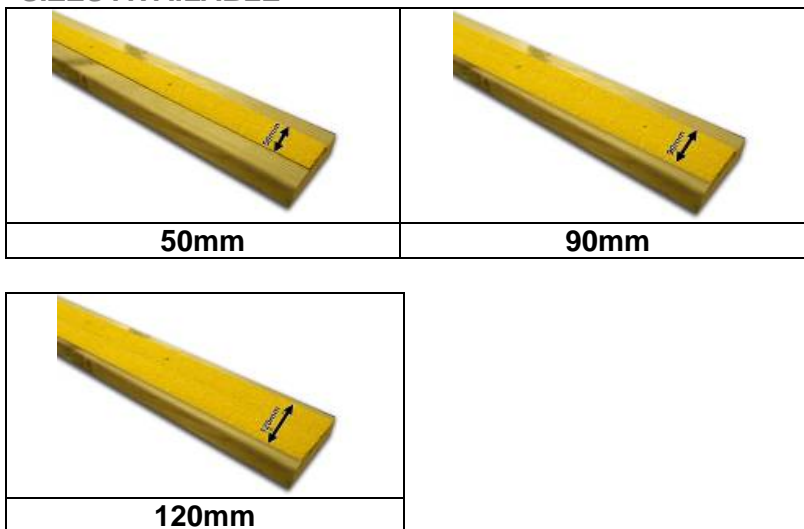

Each decking strip is 3mm thick with each edge chamfered so as to not cause a trip hazard. The grit top surface is made from a tough hard wearing aggregate that offers extreme slip resistance in most weather conditions.

Description:	Anti Slip Decking Strips
Design:	Pultruded fibreglass profile with pre-drilled holes
Size:	3mm thick, 50mm, 90mm and 120mm deep, 1200mm and 2400mm long with chamfered edges
Weight:	0.5 kg per metre
Service temperatures:	-20 to +80°C
Stock Colours:	Stone, Yellow or Black
General use:	Standard pedestrian / Some vehicle traffic

Rust-Oleum Netherlands B.V.
Braak 1, 4704 RJ
P.O. Box 138, 4700 AC
Roosendaal, The Netherlands
T +31 (0)165 593 636
F +31 (0)165 593 600
info@rust-oleum.eu
www.rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Halen, Belgium
T +32 (0)13 460 200
F +32 (0)13 460 201
info.be@ro-m.com
www.ro-m.com

Rust-Oleum France S.A.S
11, Rue Jules Verne, B.P. 60039
95322 St-Leu-la-Forêt Cedex
France
T +33 (0)1 30 40 00 44
F +33 (0)1 30 40 99 80
info.fr@ro-m.com
www.ro-m.com

Rust-Oleum UK Ltd.
Rotterdam House
116 Quayside
Newcastle
NE1 3DY
United Kingdom
T +44 (0)2476 717 329
F +44 (0)2476 718 930
info@rust-oleum.eu
www.rust-oleum.eu

PRODUCT DATA

Decking Strips

Decking Strips – Pre-drilled hole configuration

50mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

90mm Wide

1200 mm – one row of 7 holes (6 mm diameter), 50 mm in from each end and then approx. 183 mm centres. Supplied with zinc plated wood screws.

2400 mm – one row of 11 holes (6 mm diameter), 50 mm in from each end and then approx. 230 mm centres. Supplied with zinc plated wood screws.

120mm Wide

1200 mm – two row of 5 holes (10 total), (6mm diameter), 50 mm in from each end and then approx. 275 mm centres. Supplied with zinc plated wood screws.

2400 mm – two row of 5 holes (10 total), (6 mm diameter), 50 mm in from each end and then approx. 287mm centres. Supplied with zinc plated wood screws.

Safety

When installing the product, standard personal protective equipment should be worn as a minimum. These include a dust mask (or similar), safety goggles, heavy duty gloves and overalls. If required, the product should be cut in a well ventilated area or close to extraction points. Dust residue can be disposed of using normal waste disposal methods. No special permissions or licenses are required.

Rust-Oleum Netherlands B.V.

Braak 1, 4704 RJ
P.O. Box 138, 4700 AC
Roosendaal, The Netherlands
T +31 (0)165 593 636
F +31 (0)165 593 600
info@rust-oleum.eu
www.rust-oleum.eu

N.V. Martin Mathys S.A.

Kolenbergstraat 23
3545 Zelem
Halen, Belgium
T +32 (0)13 460 200
F +32 (0)13 460 201
info.be@ro-m.com
www.ro-m.com

Rust-Oleum France S.A.S

11, Rue Jules Verne, B.P. 60039
95322 St-Leu-la-Forêt Cedex
France
T +33 (0)1 30 40 00 44
F +33 (0)1 30 40 99 80
info.fr@ro-m.com
www.ro-m.com

Rust-Oleum UK Ltd.

Rotterdam House
116 Quayside
Newcastle
NE1 3DY
United Kingdom
T +44 (0)2476 717 329
F +44 (0)2476 718 930
info@rust-oleum.eu
www.rust-oleum.eu