

CITYWALL

DIMENSIONS (mm)
H: range up to 1750 max
W: 1200, 900, 600, 300
D: 100

CITYWALL 100-FB4-SR4

WEIGHT
84kg/m²

RESISTANCE
Manual attack resistance:
BS EN 1627 L3 & L4
Manual Attack Resistance:
LPCB LPS1175 SR4 issue 8
Bullet resistance: EN 1522 FB4

CITYWALL 100-FB4-F90

WEIGHT
84kg/m²

RESISTANCE
Manual attack resistance:
BS EN 1627 L3 & L4
Bullet resistance: EN 1522 FB4

CITYWALL 100-FB4-F90-EXV25

WEIGHT
84kg/m²

RESISTANCE
Manual attack resistance:
BS EN 1627 L3 & L4
Bullet resistance: EN 1522 FB4
Fire resistance: 90 mins
Blast resistance: 100kg of explosive at 25m,
ISO16933 classification EXV25 attaining
category (A) no hazard

CITYWALL 50-FB4

DIMENSIONS (mm)
D: 50

WEIGHT
74kg/m²

RESISTANCE
Manual attack resistance:
BS EN 1627 L3 & L4
Bullet resistance: EN 1522 FB4

CITYWALL 100-FB6

WEIGHT
314kg/m²

RESISTANCE
Manual attack resistance:
BS EN 1627 L3 & L4
Bullet resistance: EN 1522 FB6

CITYWALL


CityWall is a modular security walling system designed to construct secure enclosures offering protection against intrusion, manual attack, ballistic, fire and blast. Typical applications are ATM pods, panic rooms, guardhouses, cash centres, embassies, foreign exchange or any other operation where there is a serious risk of attack.

MAIN FEATURES

- Versatile modular construction
- Blast, bullet, manual attack and fire resistant all available in one product
- Constructed from a formed zintec sheet steel and steel armouring
- Can be used in bespoke external walling applications
- The complete enclosure can be fitted to an existing concrete slab or an optional steel floor can be supplied to lay on top of the existing floor

OPTIONAL

- Standard panel dimensions are stated but custom sizes can be accommodated
- Panel finish can be left in plain steel or covered in cladding to suit any environment
- Cutouts can be made to some models of CityWall to accommodate either ATM machines or bullet resistant windows

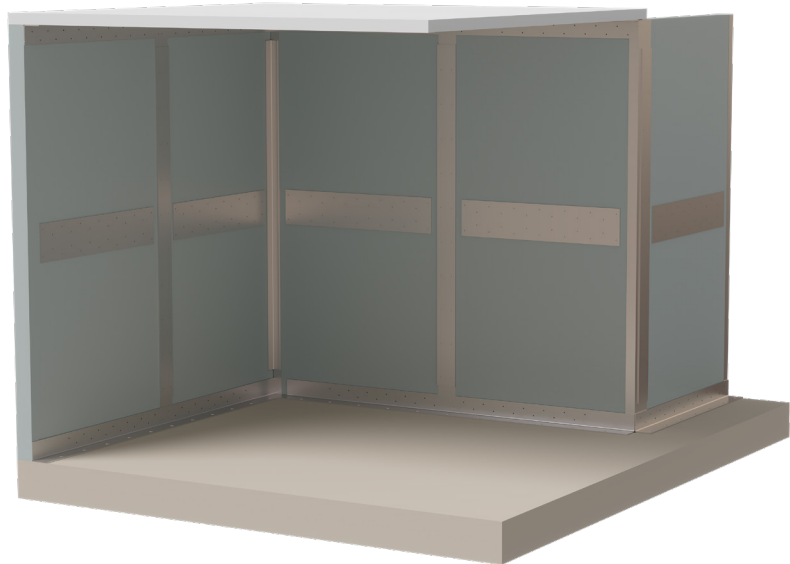

LPS 1175: Issue 8
Cert/LPCB ref. 1617a (issue 1)

**SERVICE &
MAINTENANCE
AVAILABLE**

+44 (0) 1322 223 233

sales@safetell.co.uk safetell.co.uk