


Place SAM 01 profile block on side spindle 2.

Place SAM 01 profile block on side spindle 3.

**PLEASE NOTE: WHERE NECESSARY, USE APPROPRIATE CUTTER TO REDUCE THICKNESS TO GIVEN SIZE!**

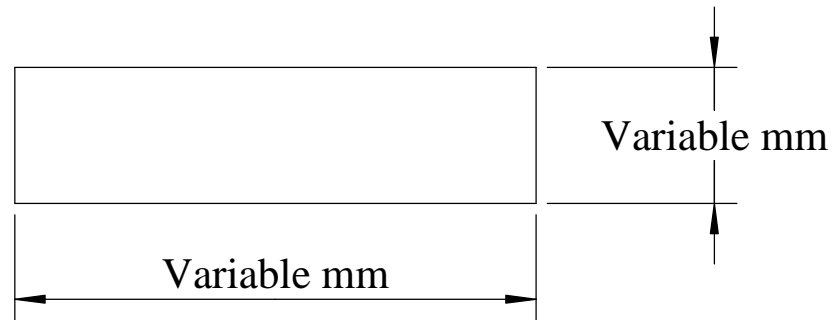

**WHEN THICKNESS HAS TO BE REDUCED,  
THE MAXIMUM WIDTH OF THIS PROFILE IS 100MM.**

**PLEASE NOTE: WHEN TOP SURFACE HAS BEEN MACHINED,  
THE BOTTOM (GOOD) SURFACE WILL BE THE PRIMED SURFACE.**

PRINTED COPY UNCONTROLLED

## SAM MOULDINGS

Newpark Industrial Estate Greystone Road Antrim BT41 2RU  
Tel : (028) 9442 8288 Fax : (028) 9442 8244

Website: [www.sammouldings.co.uk](http://www.sammouldings.co.uk) Email: [info@sammouldings.co.uk](mailto:info@sammouldings.co.uk)

PROFILE

DRAWN BY

S McMaster

REV: 2

**SAM 01**

DATE

28/09/2010

AUTH:

SCALE

1:1

TOLERANCE  
+/- 0.5MM