
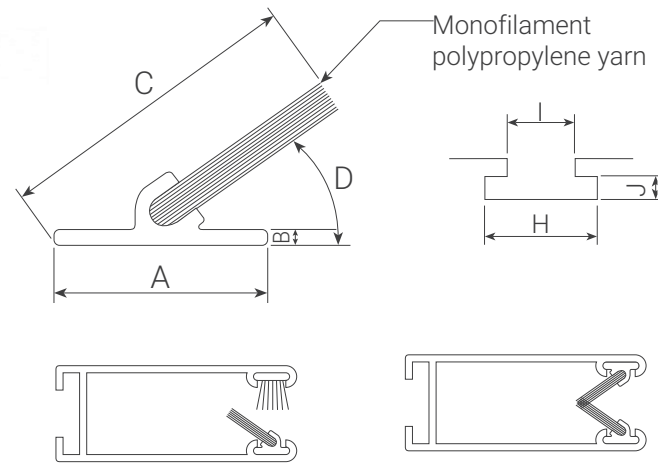


ANGLE-PILE (AP): EXTRUDED BRUSH PILE SEALS

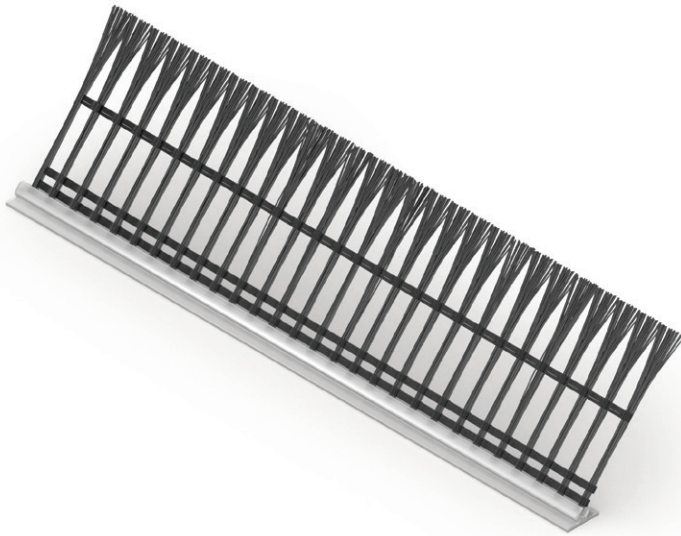

Untreated monofilament yarn with extruded base. Available in 35°, 45° or 60° angles. Guaranteed on centre pile, suitable for machine insertion. Predominantly applied in side guiding channels of rolling insect screens. Install single with softer standard pile, or double, to hold the screen mesh in the guides.

Recommended compression:

- 15-20%

	4,8	6,9
H	5,3	7,7
I	3,2	3,2
J	1,3	1,3

TECHNICAL SPECIFICATION

STANDARD SOLUTIONS				
D Angles	A Base width*	B Base thickness	C Brush height	C Brush density
45 ± 5°	4,8 ± 0,2 mm	0,65 ± 0,15 mm	9,0 ≤ C ≤ 12,0 ± 0,5 mm with 0,50 mm intervals	24
60 ± 5°	6,9 ± 0,2 mm		12,0 < C ≤ 25,0 ± 0,5 mm with 1,0 mm intervals	

Multifilament pile yarn colours (≈ RAL)



*With optional hot-melt adhesive (HM). Note: total height will increase up to 0,5 mm if hot-melt requested.