




CB TEST CERTIFICATE

Ref. Certificate No.

IT-12101

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

Issued by:	IMQ S.p.A.		
Product:	Circuit-breakers for overcurrent protection		
Applicant:	SCHNEIDER ELECTRIC INDUSTRIES SAS	ELECTROPOLE 31 RUE PIERRE MENDES FRANCE, EYBENS 38050 GRENOBLE CEDEX 9	France
Manufacturer:	SCHNEIDER ELECTRIC INDUSTRIES SAS	ELECTROPOLE 31 RUE PIERRE MENDES FRANCE, EYBENS 38050 GRENOBLE CEDEX 9	France
Factory: nb: Additional factory information on page 2	SCHNEIDER ELECTRIC BULGARIA E00D	PLOVDIVPLANT 4202 RADINOVO	Bulgaria
Rating and principal characteristics:	6A-10A-13A-16A-20A-25A-32A - 3000A - 230V - (1P - 1P+N - 2P) - 400V - (3P - 3P+N - 4P) - Curve C (See Additional Sheet)		
Trade mark (if any):	Schneider Electric 		
Model/Type reference:	Series Domae 3000A (See Additional Sheet)		
Additional information:			
Sample of product tested to be in conformity with IEC:	60898-1(ed.1);am1;am2	National differences: EU Group Differences	
Test Report Ref. No:	TPRSPPRERTPB120065403-01/00 + TPRSPPRERTB120065403-01/20		

This CB Test Certificate is issued by the National Certification Body:

IMQ S.p.A.
Via Quintiliano 43 I-20138 Milano, Italy

Signed by: Fulvio Giorgi

Date of issue: 2012-07-25





IEC SYSTEM FOR CONFORMITY TESTING
TO STANDARDS FOR SAFETY OF
ELECTRICAL EQUIPMENT (IECEE) CB
SCHEME

Ref. Certificate No.

IT-12101

SCHNEIDER ELECTRIC THAILAND CO LTD
540 SOI 9 BANGPOO INDUSTRIAL ESTATE
SUKHUMVIT ROAD, MUANG DISTRICT
10280 SAMUT PRAKARN
Thailand

SCHNEIDER ELECTRIC INDUSTRIE ITALIA
S.p.A.
VIA E. GRECO 9 - LOC. VAZIA
02100 RIETI RI
Italy

Additional information (if necessary)

This CB Test Certificate is issued by the National Certification Body:

IMQ S.p.A.
Via Quintiliano 43 I-20138 Milano, Italy


Signed by: Fulvio Giorgi

Date of issue: 2012-07-25



Description of the series DOMAE 3000A

Rated voltage: 230V (1P; 1P+N; 2P); 400V (3P; 3P+N; 4P)

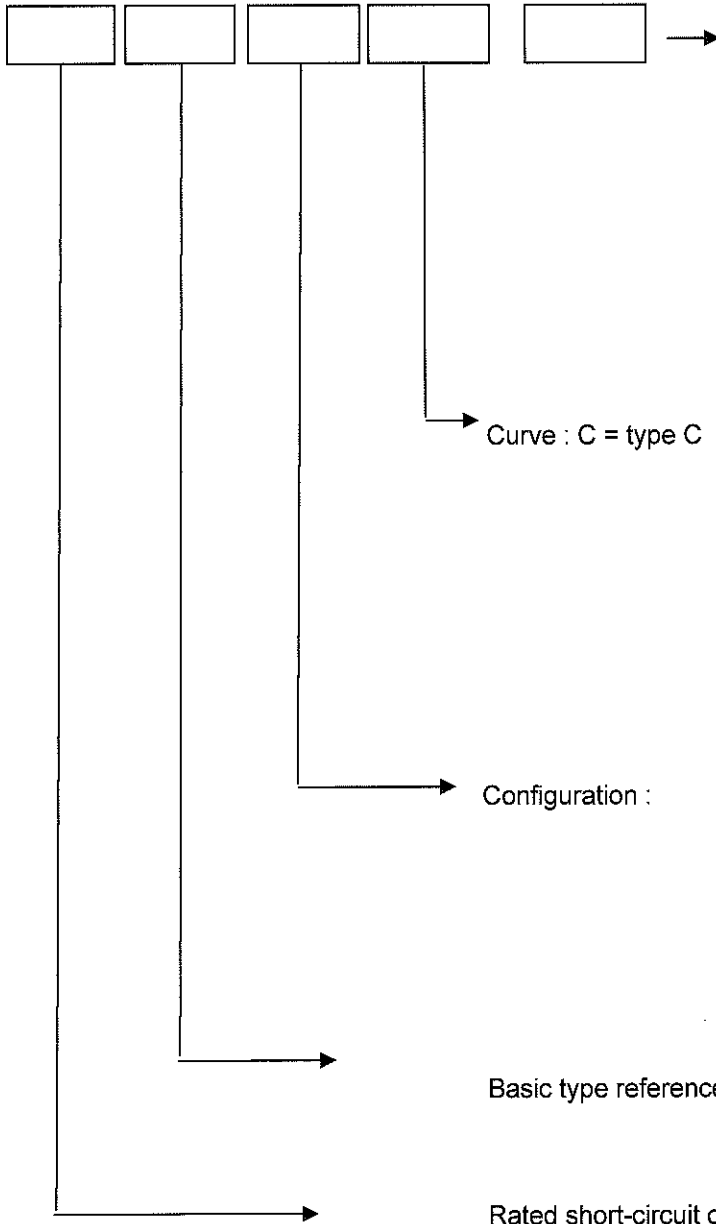

- Rated current :
- 6 = 6A
 - 10 = 10A
 - 13 = 13A
 - 16 = 16A
 - 20 = 20A
 - 25 = 25A
 - 32 = 32A

Curve : C = type C

- Configuration :
- 1 = single-pole
 - phN = single-pole + neutral (*)
 - phNR = single-pole + neutral (**)
 - 2 = two poles
 - 3 = three poles
 - 3phN = three poles + neutral(*)
 - 3phNR = three poles + neutral (**)
 - 4 = four poles

Basic type reference: DOM = case of white colour; handle of orange, black, blue or Violet colour.

Rated short-circuit capacity : 3 = 3000A

(*) Version with the neutral pole on the left; (**) Version with the neutral pole on the right.