

The Benchmark of Energy Efficiency

Infrared Tube Heater

infraSchwank D Form L



Now also with
modulating operation



Schwank
INNOVATIVE HEATING SOLUTIONS




Infrared Tube Heater – InfraSchwank D Form L


- Radiant factor of up to 59,3%*
- Available as single stage, 2-stage or fully modulating version
- Long laminar flame
- Pressure burner system Whisper-Jet for stand-alone systems

- Quiet as a whisper
- Quality "Made in Germany"
- Quick and easy assembly


* Radiant factor of an infraSchwank 30 measured by DVGW laboratory according to DIN EN 416-2

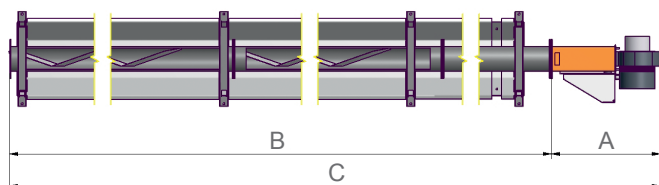

Section



View A



Dimensions [in mm]	15 L	20 L	30 L	40 L	50 L	60 L
A	445	445	445	445	470	470
B	6100	6100	9150	13620	18000	19570
Dimension B refers to: [numbers of tubes x length of tubes in mm]	2 x 3050	2 x 3050	3 x 3050	3 x 4540	2 x 3050 2 x 5950	3 x 4540 1 x 5950
C	6545	6545	9595	14065	18470	20040
D	273	273	273	273	290	290

Gas		15 L	20 L	30 L	40 L	50 L	60 L
Natural gas H / G 20	gas input in kW	15.0	19.0	29.0	39.0	49.0	60.0
[H _{i,n} = 9,97 kWh/m³]	gas consumption in m3/h	1.50	1.91	2.91	3.91	4.92	6.02
Natural gas L / G 25	gas input in kW	15.0	19.0	29.0	39.0	49.0	60.0
[H _{i,n} = 8,57 kWh/m³]	gas consumption in m3/h	1.75	2.22	3.38	4.55	5.72	7.00
Propane / G 31	gas input in kW	15.0	19.0	29.0	39.0	49.0	60.0
[H _{i,n} = 12,87 kWh/kg]]	gas consumption in kg/h	1.17	1.48	2.25	3.03	3.81	4.66
	weight in kg	57	57	80	114	142	153
	air/exhaust connection in mm	Ø 100					
	electrical consumption in W	104				91	
	electrical protection	IP 20					
	gas connection [female]	R½"	R½"	R½"	R¾"	R¾"	R¾"
	electrical supply in V	230 V / 50 Hz ~					
	ignition and control	spark ignition and ionisation electrode run by automatic controller					
	CE-Identification	CE-0085BO0037					

Appliance

- as single heater with individual fan
- as system D [herringbone system], several heaters with central flue fan

Air/exhaust requirements

- for indoor dependent operation [Art. B]
- for indoor independent operation [Art. C]

Min. connection pressure

	15 L - 50 L	60 L
Nat. gas H:	15 mbar	20 mbar
Nat. gas L:	20 mbar	30 mbar
Propane:	40 mbar	40 mbar

Max. connection pressure

Nat. gas and propane: 60 mbar

Schwank
INNOVATIVE HEATING SOLUTIONS



United Kingdom

Schwank Ltd
Suite 21, 50 Churchill
Square Business Centre,
Kings Hill, West Malling,
Kent ME19 4YU
Tel.: +44 (0) 208 641 3900
Fax: +44 (0) 208 641 2594
E-mail: sales@schwank.co.uk
Internet: www.schwank.co.uk

Ireland

Eurogas Ltd
Unit 38B, Southern Cross
Bus Pk, Boghall Road
Bray, Co Wicklow
Tel.: +353 1 286 8244
Fax: +353 1 286 1729
E-mail: info@eurogas.ie
Internet: www.eurogas.ie

Australia

Devex Systems Pty Limited
5/83 Bassett St
Mona Vale NSW 2103
Tel.: +61 02 9997 2811
Fax: +61 02 9997 7852
E-mail: info@devexsystems.com.au
Internet: www.devexsystems.com.au

New Zealand

Energy Products Int.
30 Gallagher Drive,
Frankton, Hamilton
Tel.: +64 7 839 2705
Fax: +64 7 834 4212
E-mail: sales@energy-products.co.nz
Internet: www.energy-products.co.nz