

RECESSED HOOK

TEST METHOD 18

NF-60, NF-60D



■ Features

- Hook is spring loaded to retract, 2 models available: Spring-loaded and Soft-closing.
- Clip to prevent hooked items from falling off.

■ Remarks


Please take off the cushion rubber when installing on a wooden panel.

■ Options


NF-50: Bracket for sheet metal applications




■ NF-60

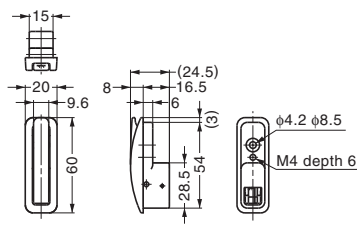


■ NF-60 Cut Out Dimensions

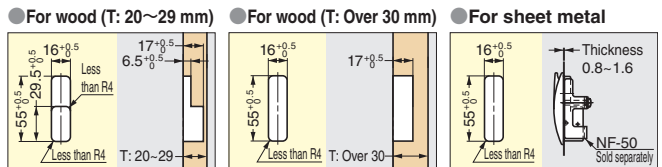

■ NF-60D

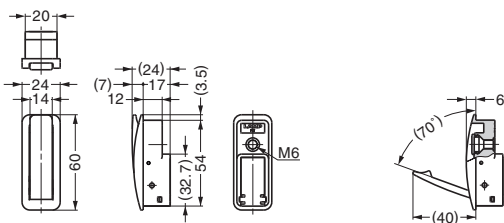

■ NF-60D Cut Out Dimensions

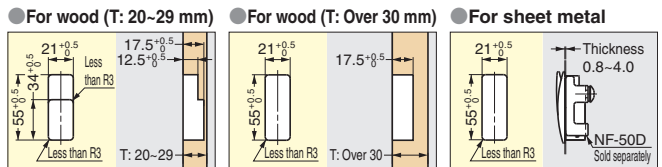

Item Code	Item Name	Damper	Bracket	Material	Finish	Load Capacity	Weight	Box	Carton
110-020-067	NF-60	Without	NF-50	Aluminium Alloy	Dark Grey	196 N 20 kgf	31 g	10 pcs	200 pcs
110-022-191	NF-60D-GR	With	NF-50D	Aluminium Alloy	Dark Grey	294 N 30 kgf	49 g	10 pcs	200 pcs
110-024-598	NF-60D-SL	With	NF-50D	Aluminium Alloy	Silver	294 N 30 kgf	49 g	10 pcs	200 pcs