

Excellence

HETEROGENEOUS VINYL

A full spectrum
of inspiration

CONTENTS

CREATE DISTINCT SPACES FROM FLOORS TO WALL	3
COMPLETE DEDICATION TO WELL-BEING	5
TOTAL DESIGN FREEDOM	7
A CONCENTRATION OF TECHNOLOGY	8
ENGINEERED FOR DURABLE RESISTANCE	9
A FULL SOLUTION FOR ALL SPACES	11
LOOSE LAY SOLUTION FOR RENOVATION: ACCZENT UNIK	13
WHATEVER YOUR NEED, WE HAVE IT COVERED	15
INSTALLING FLOORING TO ENSURE LONG LIFE	16
A METHODOICAL APPROACH TO CLEANING	17
FULL SOLUTION OPTIONS	18
EXCELLENCE TENDER SPECIFICATIONS	22



PROTECTWALL
UNI - MEDIUM GREY
044
UNI - DARK GREY 041

EXCELLENCE
ORIGAMI NUMBERS - DARK GREY 181
UNI - BLACK 939

phthalate-free
100%

CREATE DISTINCT SPACES FROM FLOORS TO WALL

Multiply your creative possibilities when designing spaces that generate energy and well-being while ensuring resistance and durability. Tarkett's premium range of heterogeneous vinyl floor, wall and stair covering collections offers a complete solution.

The heterogeneous collection of floors offers the largest colour and design range on the market. Mix and match among the attractive and innovative hues and patterns and

combine with the Stairs and ProtectWALL collections to create bespoke ambiances from floor to wall in segments such as education, healthcare, aged care, stores and shops, hospitality or offices.

And thanks to the Excellence collection's proven technical performance, floors are long-lasting and deliver environmentally sound quality and design.


DESIGN



250+
flooring
options



MATTE
finish



Full **Floor,**
Wall & Stairs
coordination

PERFORMANCE



**Excellent indentation
to acoustic ratio**

Tapiflex Excellence (Acoustic)
0.08 mm / **19** dB*

Acczent Excellence (Compact)
0.01 mm / **3** dB*

New **Compact Acoustic** Option
(Acczent Platinum)**
0.03 mm / **9** dB*



Traffic resistance
0.80 mm
wearlayer on all sheet products

*Resistance to indentation / sound impact reduction
**Please refer to page 15 of the brochure for conditions



PROTECTWALL
UNI - BRIGHT ICE BLUE 048
UNI - DARK GREY 041
TRANSITION - BLUE GREEN
066

EXCELLENCE
CUBIC - BRIGHT ICE BLUE 135
UNI - DARK GREY 916

COMPLETE DEDICATION TO WELL-BEING

A pillar of Tarkett's sustainability strategy has always been designing and making products that contribute to the health and well-being of occupants.

In 2014, the company therefore decided to take the radical step of eliminating phthalates from its vinyl flooring production in Europe. We replaced it with phthalate-free plasticizers that are approved for food containers and toys for young children.

Today, with the launch of our 100% phthalate-free Excellence collection, we are proactively meeting consumer concerns. For creating healthy spaces where people live, work, play and learn, Tarkett is your partner.

 phthalate-free
100%

Completely Better Air Quality

People spend 90% of their time indoors, so good air quality is crucial. There are no phthalates in the Excellence collection and very low levels of volatile organic compounds (VOCs).

VOCs 10 µg/m³
over 100 times lower than
the EU standard EN-ISO 16000


Completely Comfortable Walking

Tarkett turns its expertise in shock absorption, usually found in sports flooring, to building occupants. Children experience greater comfort while playing on the floor, and any unfortunate falls by the elderly are cushioned.



Complete Attention to In-Room Noise

Tarkett acoustic flooring dampens noise, creating a quieter environment that is conducive to both learning and healing.

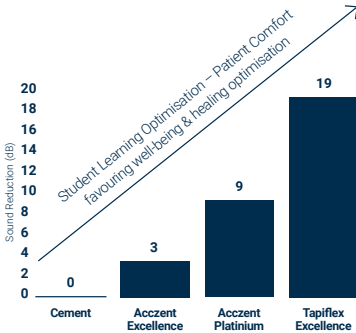



PROTECTWALL
UNI - GREEN CELADON - 038
CONCRETE - COOL GREY - 058
BRUSHED METAL - SILVER
054

EXCELLENCE
FACET - WATER 115
UNI - INTENSE WATER 936
OAK TREE - GREY 202
ALLOVER WOOD - WHITE 714

TOTAL DESIGN FREEDOM

Tarkett's Excellence collection provides a multitude of choices that meet current design trends and complement your requirements.



Total Inspiration

The largest selection of colours and designs on the market. Play with novel ideas.




Total Wood Realism

Unique multicolour welding rods for all wood decor give the most realistic and seamless look when installed.

250+
flooring options


80%
new patterns



Total Harmonisation

Tarkett's Excellence range has been designed to harmonise with four new ranges:

**ProtectWALL, Tapiflex Stairs,
Acczent & Tapiflex Platinum,
and accessory collections**



Total Matte Effect

A high matte finish softens light reflected off flooring for additional occupant comfort and a more realistic look.

100% matte finish

Uni-coloured welding rod




Multi-coloured welding rod



Space through Light and Harmony

Energising and stimulating, light plays a major role in any space. Three types of light, beneficial, natural and smart, inspired our Excellence collection. In any space, generate wellness and warmth, revitalise and infuse energy, and encourage interaction and connection. Play with a myriad of colours, patterns and textures to create unique spaces and enhance well-being.

A CONCENTRATION OF TECHNOLOGY

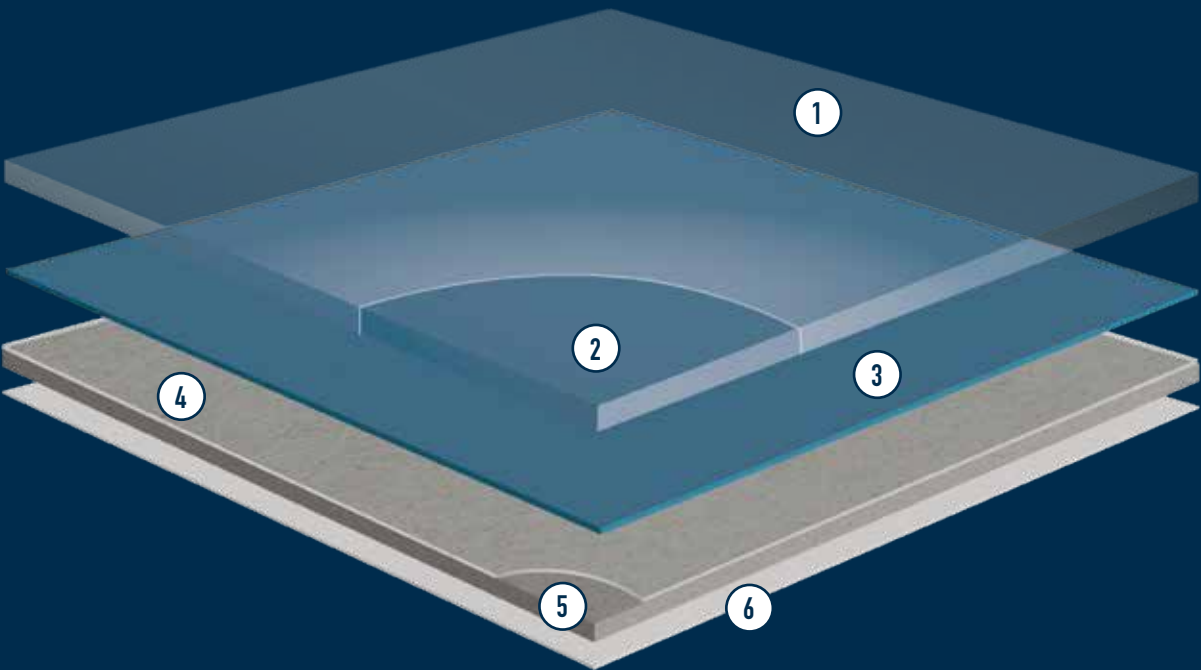

- 1

PUR treatment, a photo-reticulated coating, is highly resistant to abrasion and scratches
- 2

Pure PVC transparent wear layer – 0.80 mm on all profiles – for the best resistance to traffic and wear
- 3

High quality printed designs for a vast selection of colours and patterns
- 4

High density glass fibre non-woven reinforcement for high dimensional stability and resistance to furniture
- 5

Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing
- 6

The Tapiflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

ENGINEERED FOR DURABLE RESISTANCE

Our Excellence collection is built to withstand daily wear in all areas while also lowering the overall life-cycle cost and maintaining the floor’s freshly installed appearance for longer.

Durable Wear on All Products

NEW!
0.80 mm
 on both **acoustic** (Tapiflex) & **compact** (Acczent) options
 In order to adapt to building-specific requirements.

NEW!
0.03 mm / 9 dB
Compact acoustic option (Acczent Platinum)
 For high traffic areas requiring medium acoustic performance, ask about our compact 1mm wear layer compact acoustic flooring.

Durable Resistance to Indentation


Each layer is coated onto the previous one, creating a fused product highly resistant to the wear and tear of daily life. The flooring is impervious to indentation and tearing.

Tapiflex	Acczent
0.08 mm	0.01 mm
Resistance to indentation (best measured value)	

Durable Rolling Capability

Less force is required and it is easier to push trolleys and medical beds*.


*internal testing
29% improved rollability on compact & acoustic profiles
 (vs. former range)

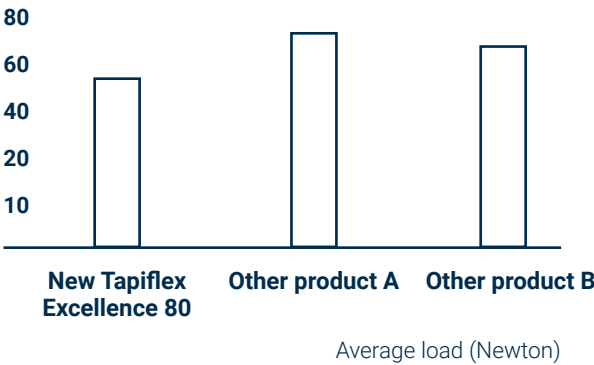

Minimal Maintenance

Resisting stains in numerous environments, floors can be cleaned using a little water and neutral detergents to maintain cleanliness between mechanical buffings.

Up to **25%** reduction in the cost of maintenance and cleaning*
 *Refer to Tarkett Life Cycle Cost (LCC) software

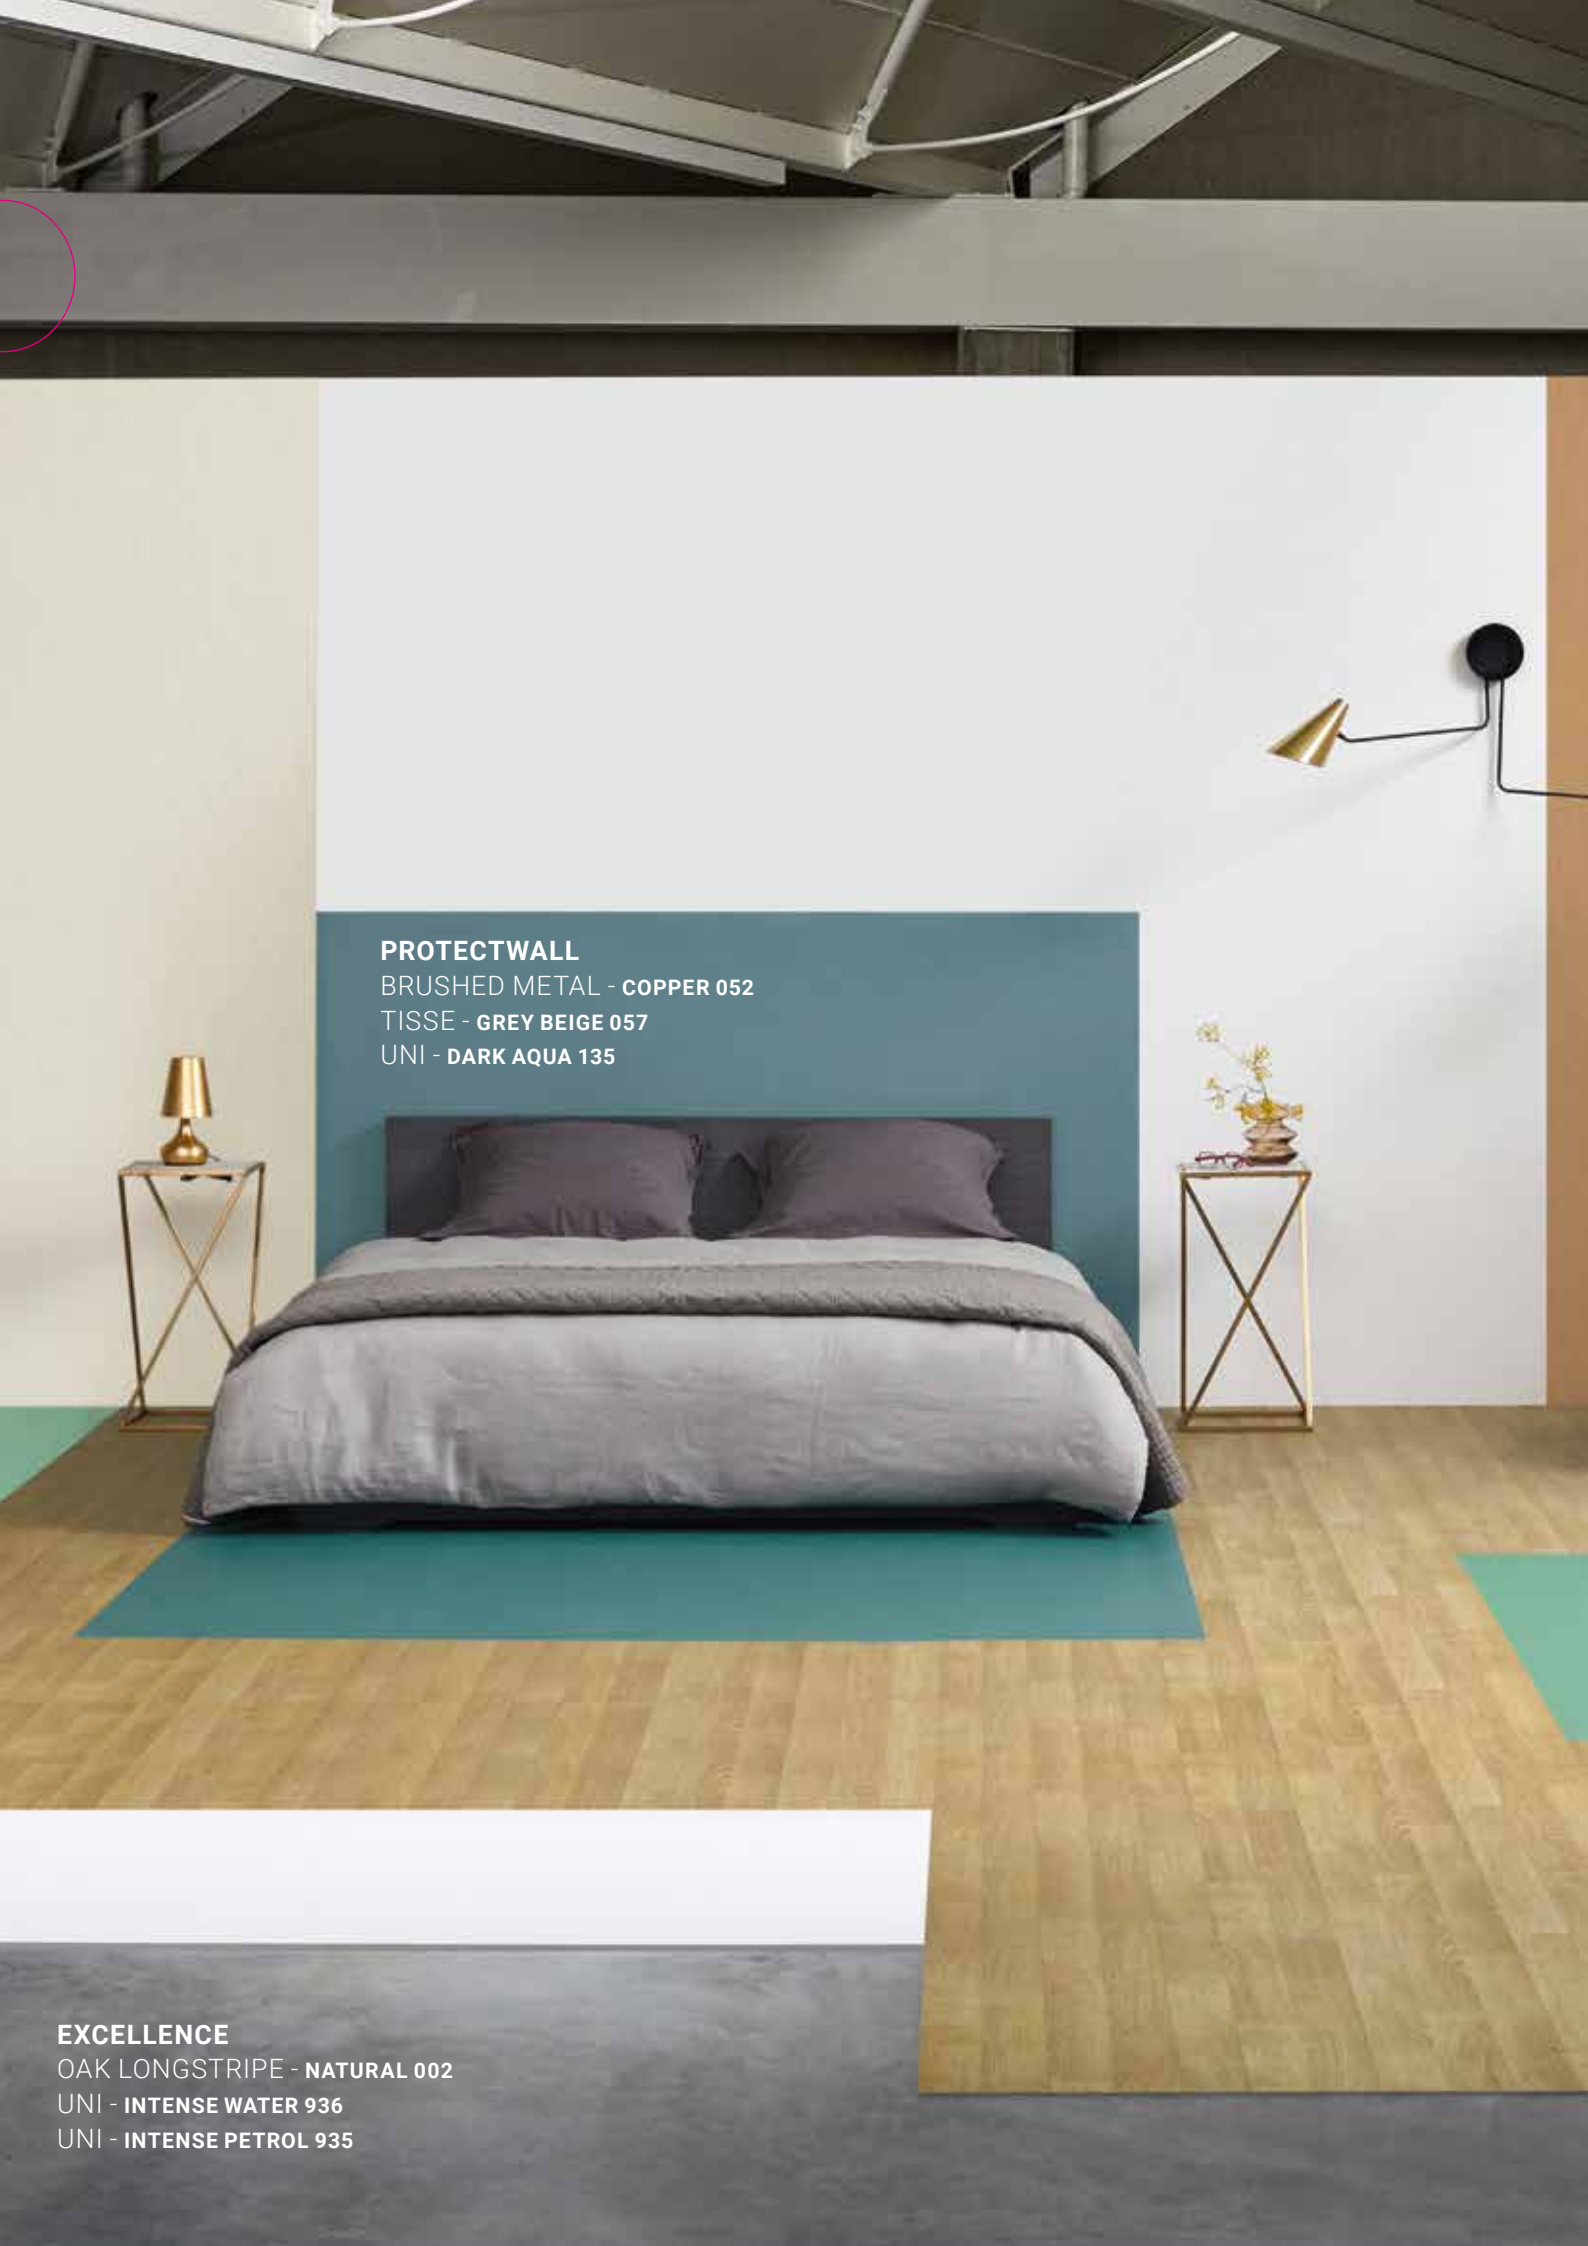

PROTECTWALL
BRUSHED METAL - COPPER 052
TISSE - GREY BEIGE 057
UNI - DARK AQUA 135

EXCELLENCE
OAK LONGSTRIPE - NATURAL 002
UNI - INTENSE WATER 936
UNI - INTENSE PETROL 935

A FULL SOLUTION FOR ALL SPACES

The Excellence collection has been designed to harmonise with ProtectWALL, Acczent & Tapiflex Platinum, Tapiflex Stairs and accessory ranges. We have taken this a step further; patterns that are identical across the range have been developed to help your architectural project benefit from a coordinated design across all areas. Install the full solution!

Wetroom Concept

For a watertight design solution
(Floor: 89 colour options
Wall: 77 colour options)

ProtectWALL

For maximum impact,
stain & scratch resistance
(50 colour options)

Tapiflex Stairs

For increased safety
(22 colour options)

NEW Platinum

For the ideal heavy
traffic solution
(72 colour options)

NEW Excellence


For maximum design possibilities
(127 colour options)

Accessibility Tactile warning strips

To ensure safety and guidance


Accessories for a perfect finish

Optimise building orientation, navigation and safety with our dedicated range of accessories.



WELDING RODS

Secure the junction between two rolls of flooring or wall and floor coverings. Unique multicolour welding rods for wood patterns.



PRE-FORMED SKIRTING

Pre-formed set-in skirting made of PVC flooring, reinforced with polymer on backside. Welded to the floor covering and glued to the wall. 60/80/100 x 100/200 x 2400mm. Available on request in all colours



SET-ON SKIRTING

KS 61: PVC semi-rigid skirting for decorative use.
Article code: 1411 + colour code
(please refer to reference list, page 19)



TRANSITION PROFILE

Used to join different floorings of the same or slightly different heights.
Order code:
Dark grey: 1452 000/Light grey: 1452 001/
White: 1452 002

ALSO AVAILABLE

- Accessibility items: tactile guide strips, tiles, studs
- Expansion joints
- Tarkoprotect

Please also ask for more information from your Tarkett rep.

PROTECTWALL
JUNGLE - TONIC 068
TISSAGE - SOFT LIGHT GREEN 131

EXCELLENCE
TISSAGE - SOFT WATER 134
TISSAGE - SOFT LIGHT GREEN 131
OAK TREE - NATURAL 200

LOOSE LAY SOLUTION FOR RENOVATION: ACCZENT UNIK

Make the most of resources without compromising on quality during renovation work – and new builds – using Tarkett's Acczent Unik compact loose lay rolls. Installing quickly and easily, their durability has been proven through long years of resisting high traffic levels in buildings throughout Europe.

Installation Performance

Acczent Unik is easy to install and remove, saving time and money. Install directly on subfloors, and use the floor immediately after installation.

25 m² fully installed in 2 hours,
40% faster
than glue-down flooring



**Extreme resistance
to traffic**

Resists to 75,000 cycles castor chair test,

25% over European Standard
requirements



Resistance Performance

10 years

of resisting high traffic in areas like entrances and corridors are proof of Acczent Unik's capacity to withstand marks, abrasions and scratches, and indentation.



Design Performance

A widened range includes new, fresh and colourful options for Education and Offices, as well as wood and mineral tones ideal for Aged Care facilities. 100% matching with Acczent and Tapiflex glue-down flooring.

NEW! 15 colours

Extended colours available on demand

0.80 mm wear layer,
suitable for Class 34/43 buildings

Compatible with asbestos subfloors

No need to undertake the costly removal of asbestos tiles. Simply cover them up. Monitor easily throughout the flooring's life.

0.1 mm*
best-in-class resistance to indentation

* best measured value

**Dedicated post-use
recycling programme**

To ensure participation in a circular economy model.

Individualised designs with Floorcraft service

For your projects requiring individually customised designs with logos, brand colours or other visual elements, Tarkett Floorcraft offers unique bespoke designs created by our **FLOORCRAFT design service using sonic cut**. Designs can be tailored to the aesthetic and commercial requirements and shape of any floor area. Floorcraft designs are assembled in the factory and delivered to the site. Detailed layout plans make it fast and simple to install.

For more information: professionals.tarkett.com/content/floorcraft-design-service



WHATEVER YOUR NEED,
WE HAVE IT COVERED

From your specific needs based on building constraints, optimal budget management and design customisation to jobsite waste management, Tarkett accompanies you throughout your design and building process.

Product options

In addition to our standard, permanently available collection, we offer further options to meet specific requirements. All products can be produced with a selection of colours in the full Excellence range as a special arrangement. See conditions below.

PRODUCTS	MINIMUM ORDER QUANTITY	LEADTIME
Accent Platinum (Compact acoustic 9 dB – 1 mm Wear Layer)	600 m²	5 weeks
Accent Unik Loose Lay	1,100 m²	5 weeks
Tapiflex Tiles	1,100 m²	5 weeks

Post-Installation Clean-up

- Get flooring offcuts collected and recycled with Tarkett's comprehensive ReStart programme.
- Job site waste is reduced.
 - Job site waste management is optimised.
 - Guaranteed traceability of collected off-cuts.
 - Sustainable development is integrated, anticipating European regulation requirements.



Reducing the Cost of Flooring during its Full Lifespan

Your project's global budget dedicated to flooring includes not only purchase and installation but must also cover cleaning and maintenance operations performed on the floor during its lifespan.

Tarkett's highly resistant surface treatment, TopClean XP – no polish and no wax for life – facilitates and shortens cleaning operations and lowers consumption of chemicals, water and electricity, generating significant savings and limiting environmental impact at the same time.

Your Tarkett contact is at your disposal to help you the complete a Life Cycle Cost estimate for your facility or project.

LCC Calculation

Purchase & installation	Cleaning & maintenance
8% of total flooring cost*	92% of total flooring cost*

*average

INSTALLING FLOORING TO ENSURE LONG LIFE

Tarkett has a wide variety of techniques and tips to ensure perfect installation and keep your flooring in good condition for years to come.


STEPS IN INSTALLING

1. Subfloor control




- The subfloor must be sound, hard, flat, clean and free from all types of marks, debris & residues, and not exposed to humidity.
- Absorbency must be checked and when needed, treated with a primer to have moderately absorbent subfloor.
- Refer to local standards for detailed rules and control methods.
- Stop underfloor heating for minimum 48h before installation and maintain the temperature in the room with an alternative heating source.

2. Before installation

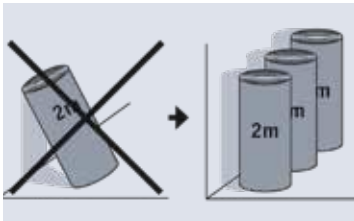


- Store 2m large rolls vertically in storage area. Larger rolls should be stored horizontally.
- Let the flooring acclimatize at least 24h before laying and cut sheets should be relaxed another 24h, both at room temperature.
- Define your layout to ensure whenever possible that joins do not coincide with doorways and main traffic lanes.
- If the room is square, the sheets should run parallel to the incoming light. In long, narrow rooms the sheets can be installed along the length of the room.

3. Rolls installation

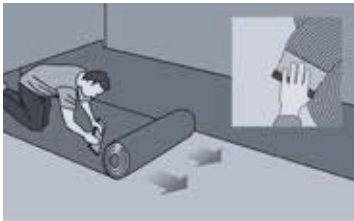

- Butt join when edges are straight, if not, overlap the edges and trim the two sheets simultaneously (double cut method).
- Fold the first half of the sheets.
- Apply acrylic adhesive with a spatula (TKB A1 for compact, TKB A2 for acoustic) - refer to adhesive manufacturer's instruction for waiting time.
- Fold back the first half of the flooring into the adhesive and press.
- Repeat this operation on the other half
- Excess of material close to walls and obstacles can be trimmed/flushed (freehand cut).
- Use a heavy roller on the whole surface to ensure final bonding.

4. Hot welding

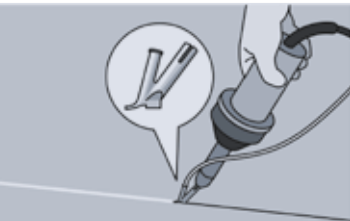

- Wait minimum 24h after installation.
- Hot weld with 4mm PVC welding rod: groove (2/3 of the compact layer) and weld at approx. 400°C with a hot speed nozzle.
- Trim the welding rod in 2 steps (immediately and after 5 minutes) with a Mozart knife.

5. After installation

- Clean working area from all adhesive marks, stains and dust.
- Prevent soiling by protecting the area.
- Open the area to normal traffic 48 hours after installation and move furnitures after 72 hours.

For more detailed explanations, or specific installation methods (cove forming, tiles installation, Acczent Unik loose-lay installation), please refer to full installation notice. Please contact your local representative for any questions. Tarkett accepts no liability for adhesives and levelling compounds used, including those recommended.

A METHODOICAL APPROACH TO CLEANING

Tarkett's PUR surface treatment facilitates cleaning and decreases the need for water and solvents, reducing environmental impact. Regular and attentive cleaning maintains flooring in between periodic deep-clean buffing sessions.

General Advice

- Clean the floorcovering regularly, as this is more cost-effective and hygienic than occasional heavy-duty cleaning.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality floor protectors. Felt pads are not recommended in commercial interiors. Hard plastic is preferred.
- Install doormats at the entrance of the buildings to catch humidity, dirt, dust etc. They must be at least three strides long (approx. 1.5 m).
- Always follow manufacturers' recommendations (detergent, cleaning machine...).

SETTING IN TRAFFIC	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	- Dry mopping. - Vacuum cleaning.
	2. Cleaning	- Mechanical cleaning with scrubbing machine - red pad, medium speed - and water vacuuming, or combined machine. - Use neutral detergent (pH 6/8) or alkaline detergent (pH 8/12) in case of heavy soiling. - If an alkaline detergent (pH 8/12) is used, the flooring should be rinsed with water and water vacuumed.
	3. Stain removal	- A detergent should be used to remove work-site stains (glue, paint...) according to the nature of the stain. - Do not use abrasive pads.
DAILY CLEANING	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	- Dry mopping. - Vacuum cleaning.
	2. Cleaning (if and where it's necessary)	- With flat or micro fibre mop, impregnated or not. or - With a combined machine (red pad, medium speed). - Use neutral detergent (pH 6/8).
	3. Stain removal	- For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.
PERIODICAL CLEANING	ACTIONS	INSTRUCTIONS
	1. Light soiling	- Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed - Use detergent neutral or alkaline (pH 7/9)
	2. Heavy soiling	- Apply a cleaning solution (pH 10-11, after dilution) to the flooring and allow to act for 5-10 min. - Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed. - Vacuum up the soiled water immediately. - Rinse with clean water and allow the floor to dry.
	3. Stain removal	- For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.



				ACCZENT EXCELLENCE/TAPIFLEX EXCELLENCE (ROLLS TO BE GLUED)	ACCZENT UNIK (LOOSE LAY ROLLS)	TAPIFLEX TILES (TO BE GLUED)	TAPIFLEX STAIRS	PROTECTWALL 1.5	MATCHING SKIRTINGS	MATCHING WR		
Design	Colour	NCS	LRV (%)	Acczent (Compact)	Tapiflex (Acoustic)	Unik (Compact)	Tapiflex (Acoustic)			KS 61	Unicolour	Multicolour
BRUSHED ALU	GREY	S 4500-N	26,5	25130100	25135100	–	✓*	ESQUISSE STAIRS light grey 25171018	UNI warm grey 26500043	1411 010	1287006	
BUBBLES	COLD MIX	S 2500-N	39	25130143	25135143	–	✓*	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 011	1287412	
	WARM MIX	S 2500-N	44,3	25130142	25135142	–	✓*	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 011	1287412	
CARPET	INTENSE JEAN	S 6005-R80B	19	25128107	25133107	✓*	✓*	UNI STAIRS medium alu 25172118	UNI warm grey 26500043	1411 009	1292450	
	INTENSE OLIVE	S 4010-G90Y	27,6	25128106	25133106	✓*	✓*	CONCRETE STAIRS cool grey 25171000	UNI intense olive 26500047	1411 009	1287330	
	WHITE GREY	S 2502-Y	41,5	25128108	25133108	✓*	✓*	TISSAGE STAIRS soft grege 25171032	UNI white grey 26500132	1411 012	1287716	
CONCRETE	CHALK	S 2502-Y	46,3	25128502	25133502	25070502	25185502	TISSAGE STAIRS soft grege 25171032	CONCRETE chalk 26500059	1411 012	1287572	
	COOL GREY	S 3500-N	36,3	25128500	25133500	25070500	25185500	CONCRETE STAIRS cool grey 25171000	CONCRETE cool grey 26500058	1411 011	1287524	
	DARK GREY	S 6502-Y	12,6	25128501	25133501	25070501	✓*	UNI STAIRS medium alu 25172118	UNI warm grey 26500043	1411 008	1287585	
	GREY BEIGE	S 3005-Y20R	33,4	25128503	25133503	✓*	✓*	TISSAGE STAIRS soft grege 25171032	CONCRETE chalk 26500059	1411 012	1287713	
	STEEL BLUE	S 6500-N	13,2	25128507	25133507	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI dark grey 26500041	1411 009	1287836	
	WARM GREY	S 6005-Y20R	18,8	25128504	25133504	✓*	✓*	ESQUISSE STAIRS light grey 25171018	CONCRETE chalk 26500059	1411 013	1287870	
CUBIC	BRIGHT ANIS	S 5020-B50G	31,7	25130164	25135164	–	–	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 009	1294073	
	BRIGHT ICE BLUE	S 2020-B60G	32,7	25130165	25135165	–	–	UNI STAIRS bright ice blue 25172122	UNI bright ice blue 26500048	1411 009	1294073	
	BRIGHT ORANGE	S 1070-Y70R	25,1	25130162	25135162	–	–	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 009	1294073	
	BRIGHT YELLOW	S 2050-Y	31,4	25130163	25135163	–	–	UNI STAIRS bright yellow 25172120	UNI bright yellow 26500037	1411 009	1294073	
	INTENSE PETROLE	S 5020-B30G	22,5	25130166	25135166	–	–	UNI STAIRS grey 25172117	UNI dark aqua 26500135	1411 009	1294073	
	DARK BEIGE	S 4005-Y20R	26,2	25130167	25135167	–	–	UNI STAIRS dark beige 25172116	UNI dark grey 26500041	1411 009	1294073	
DIAMOND	BLUE	S 5030-R90B	11,6	25128123	25133123	✓*	–	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 038	1287515	
	BLUE GREEN	S 5030-B30G	12,5	25128124	25133124	✓*	–	UNI STAIRS bright ice blue 25172122	UNI green celadon 26500038	1411 035	1287461	
	GREY	S 6500-N	15,5	25128125	25133125	✓*	–	UNI STAIRS medium alu 25172118	UNI medium grey 26500044	1411 008	1287753	
	ORANGE	S 2060-Y70R	20,9	25128122	25133122	✓*	–	NEON STAIRS bright orange 25172026	UNI medium grey 26500044	1411 011	1287517	
DIGITAL WAVE	GREY	S 3502-B	40	25130183	25135183	–	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 011	1287845	
	GREY ANIS	S 6502-Y	14,5	25130184	25135184	–	✓*	NEON STAIRS bright anis 25172028	UNI bright anis 26500039	1411 008	1287647	
	GREY ICE BLUE	S 6500-N	14,4	25130182	25135182	–	✓*	NEON STAIRS bright ice blue 25172029	UNI bright ice blue 26500048	1411 008	1287836	
ENCRYPTION	BLACK & WHITE	S 7500-N	9	25128189	25133189	✓*	✓*	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 007	1287529	
ESQUISSE	DARK GREY	S 6500-N	14,9	25128015	25133015	✓*	25185015	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 008	1287375	
	GREY BEIGE	S 2502-Y	47,3	25128012	25133012	✓*	✓*	ESQUISSE STAIRS light grey 25171018	CONCRETE chalk 26500059	1411 012	1287572	
	LIGHT CHOCOLATE	S 6005-Y50R	20	25128017	25133017	✓*	✓*	ESQUISSE STAIRS light grey 25171018	TISSE grey 26500004	1411 013	1287458	
	LIGHT GREY	S 4502-Y	30,6	25128013	25133013	✓*	25185013	ESQUISSE STAIRS light grey 25171018	CONCRETE cool grey 26500058	1411 010	1287854	
	MEDIUM GREY	S 6000-N	19	25128014	25133014	✓*	25185014	ESQUISSE STAIRS dark grey 25171015	UNI medium grey 26500044	1411 009	1287832	
FACET	ANIS	S 2050-G90Y	39,4	25128114	25133114	✓*	25185114	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 036	1287137	
	BEIGE	S 5010-Y10R	28,6	25128119	25133119	✓*	✓*	UNI STAIRS dark beige 25172116	TISSE grey beige 26500057	1411 027	1287830	
	BLACK & WHITE	S 5500-N	21,8	25128118	25133118	✓*	✓*	ESQUISSE STAIRS light grey 25171018	UNI super white 26500221	1411 012	1287840	
	BLUE	S 5030-R80B	8	25128120	25133120	✓*	✓*	UNI STAIRS medium grey 25172123	UNI bright extreme blue 26500042	1411 039	1287580	
	FONTE	S 5502-B	12,5	25128117	25133117	✓*	✓*	UNI STAIRS grey 25172117	UNI dark grey 26500041	1411 009	1287392	
	MID GREY	S 4000-N	32,2	25128116	25133116	✓*	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 011	1287831	
	ORANGE	S 2060-Y70R	25,1	25128112	25133112	✓*	25185112	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 020	1287158	
	PRUNE	S 6020-R10B	9,3	25128121	25133121	✓*	✓*	UNI STAIRS dark beige 25172116	UNI intense plum 26500051	1411 029	1287649	
	WATER	S 4020-B70G	25,3	25128115	25133115	✓*	25185115	UNI STAIRS bright ice blue 25172122	UNI green celadon 26500038	1411 035	1288311	
	YELLOW	S 2050-Y10R	39,9	25128113	25133113	✓*	✓*	UNI STAIRS bright yellow 25172120	UNI bright yellow 26500037	1411 028	1287653	
FLOCONS²	RAINBOW	S 2000-N	48,1	25128170	25133170	✓*	✓*	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 012	1287837	
	RED	S 2050-Y90R	25,2	25128169	25133169	✓*	✓*	UNI STAIRS medium alu 25172118	UNI bright red 26500045	1411 019	1287868	
FUSION LINES	BEIGE	S 3005-Y20R	36,3	25130173	25135173	–	✓*	TISSAGE STAIRS soft grege 25171032	UNI light beige 26500122	1411 027	1287707	
	BRIGHT ORANGE	S 2060-Y70R	25,4	25130178	25135178	–	✓*	UNI STAIRS bright orange 25172119	UNI bright orange 26500036	1411 020	1287154	
	BRIGHT VIOLET	S 4040-R30B	14,2	25130177	25135177	–	✓*	NEON STAIRS bright orange 25172026	UNI bright orange 26500036	1411 020	1287823	
	DARK GREY	S 6000-N	16,6	25130172	25135172	–	✓*	FUSION LINES STAIRS dark grey 25172025	UNI warm grey 26500043	1411 008	1287842	
	INTENSE OLIVE	S 3030-G90Y	32,9	25130175	25135175	–	✓*	NEON STAIRS bright anis 25172028	TRANSITION yellow green 26500067	1411 008	1287878	
	INTENSE PETROLE	S 5020-B30G	14,2	25130174	25135174	–	✓*	NEON STAIRS bright ice blue 25172029	UNI dark aqua 26500135	1411 044	1287201	
	PHOSPHO	S 4500-N	28,7	25130171	25135171	–	✓*	FUSION LINES STAIRS phospho 25172024	TRANSITION grey 26500065	1411 011	1287861	
	TURQUOISE	S 4040-B10G	16,3	25130176	25135176	–	✓*	NEON STAIRS bright ice blue 25172029	UNI bright dark turquoise 26500040	1411 044	1287564	
GRANITO	COOL GREY	S 3000-N	40,8	25128111	25133111	✓*	✓*	CONCRETE STAIRS cool grey 25171000	CONCRETE cool grey 26500058	1411 013	1287027	
	LIGHT BEIGE	S 2005-Y30R	50,4	25128109	25133109	✓*	✓*	GRANITO STAIRS beige 25171013	CONCRETE chalk 26500059	1411 012	1287069	
	WARM GREY	S 3005-Y50R	37,3	25128110	25133110	✓*	✓*	GRANITO STAIRS grey 25171012	TISSE warm grey 26500005	1411 010</		

* possible on demand (MOQ & leadtime page 15)

					ACCZENT EXCELLENCE/TAPIFLEX EXCELLENCE (ROLLS TO BE GLUED)	ACCZENT UNIK (LOOSE LAY ROLLS)	TAPIFLEX TILES (TO BE GLUED)	TAPIFLEX STAIRS	PROTECTWALL 1.5	MATCHING SKIRTINGS	MATCHING WR		
	Design	Colour	NCS	LRV (%)	Acczent (Compact)	Tapiflex (Acoustic)	Unik (Compact)	Tapiflex (Acoustic)			KS 61	Unicolour	Multicolour
	STEEL	 GREY	S 5000-N	22,7	25128601	25133601	25070601	25185601	ESQUISSE STAIRS light grey 25171018	UNI warm grey 26500043	1411 010	 1287454	
	TAPPED METAL	 GREY	S 5500-N	18,8	25128126	25133126	✓*	✓*	ESQUISSE STAIRS light grey 25171018	UNI warm grey 26500043	1411 010	 1287842	
	TERRAZZO	 BLUE	S 2502-Y	43,2	25128105	25133105	✓	25185105	CONCRETE STAIRS cool grey 25171000	CONCRETE cool grey 265000058	1411 013	 1292770	
		 GREEN	S 2502-Y	39,6	25128103	25133103	✓	✓*	GRANITO STAIRS grey 25171012	UNI green celadon 26500038	1411 035	 1292770	
		 TERRACOTTA	S 2502-Y	47,7	25128104	25133104	✓	25185104	GRANITO STAIRS beige 25171013	CONCRETE chalk 265000059	1411 012	 1292770	
	TISSAGE	 SOFT BEIGE	S 2005-Y40R	46,3	25128129	25133129	✓*	✓*	OAK TREE STAIRS beige 25171030	UNI light beige 26500122	1411 027	 1287707	
		 SOFT GREGE	S 3005-Y20R	42,5	25128128	25133128	25070128	✓*	TISSAGE STAIRS soft grege 25171032	TISSE grey beige 265000057	1411 027	 1287572	
		 SOFT GREY	S 3500-N	37,9	25128127	25133127	✓*	✓*	UNI STAIRS medium grey 25172123	UNI medium grey 26500044	1411 011	 1287459	
		 SOFT LIGHT BLUE	S 3010-B10G	32,8	25128130	25133130	25070130	✓*	UNI STAIRS medium grey 25172123	UNI white blue 26500049	1411 042	 1291817	
		 SOFT LIGHT GREEN	S 2020-G90Y	52,8	25128131	25133131	25070131	✓*	UNI STAIRS bright anis 25172121	UNI super white 26500221	1411 012	 1287639	
		 SOFT ORANGE	S 2030-Y60R	41,3	25128132	25133132	25070132	✓*	UNI STAIRS bright orange 25172119	UNI super white 26500221	1411 012	 1287877	
		 SOFT PINK	S 1030-R20B	40,4	25128135	25133135	✓*	✓*	UNI STAIRS medium grey 25172123	UNI super white 26500221	1411 012	 1287190	
		 SOFT WATER	S 2010-G	49,3	25128134	25133134	25070134	✓*	OAK TREE STAIRS grey 25171031	UNI green celadon 26500038	1411 035	 1287875	
		 SOFT YELLOW	S 1030-Y	55,1	25128133	25133133	25070133	✓*	UNI STAIRS bright yellow 25172120	TISSE light yellow 265000055	1411 012	 1287596	
	TWINE	 DARK GREY	S 5500-N	19,3	25128138	25133138	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 009	 1287183	
		 TURQUOISE	S 5005-B80G	19	25128139	25133139	✓*	25185139	NEON STAIRS bright ice blue 25172029	UNI green celadon 26500038	1411 035	 1287362	
		 INDIGO	S 6010-R70B	13,5	25128140	25133140	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	UNI warm grey 26500043	1411 009	 1287409	
	UNI	 BLACK	S 8502-B	5,4	25131939	25136939	–	–	UNI STAIRS medium alu 25172118	UNI super white 26500221	1411 007	 1287314	
		 BRIGHT ANIS	S 2050-G90Y	41,8	25131931	25136931	–	–	UNI STAIRS bright anis 25172121	UNI bright anis 26500039	1411 036	 1287598	
		 BRIGHT DARK TURQUOISE	S 4040-B30G	15,9	25131933	25136933	–	–	UNI STAIRS bright ice blue 25172122	UNI bright dark turquoise 265000040	1411 044	 1287564	
		 BRIGHT EXTREME BLUE	S 4050-R80B	9,3	25131941	25136941	–	–	UNI STAIRS medium grey 25172123	UNI bright extreme blue 265000042	1411 039	 1287873	
		 BRIGHT ICE BLUE	S 2020-B50G	40,3	25131932	25136932	–	–	UNI STAIRS bright ice blue 25172122	UNI bright ice blue 26500048	1411 044	 1287188	
		 BRIGHT ORANGE	S 2060-Y70R	23,4	25131929	25136929	–	–	UNI STAIRS bright orange 25172119	UNI bright orange 265000036	1411 020	 1287646	
		 BRIGHT PINK	S 3050-R20B	17,5	25131927	25136927	–	–	UNI STAIRS medium grey 25172123	UNI super white 26500221	1411 012	 1287874	
		 BRIGHT RED	S 2070-Y90R	15,1	25131928	25136928	–	–	UNI STAIRS medium grey 25172123	UNI bright red 265000045	1411 019	 1287463	
		 BRIGHT TURQUOISE	S 3040-B40G	27,5	25131926	25136926	–	–	UNI STAIRS bright ice blue 25172122	UNI bright turquoise 265000046	1411 044	 1287871	
		 BRIGHT YELLOW	S 2050-Y10R	43,7	25131930	25136930	–	–	UNI STAIRS bright yellow 25172120	UNI bright yellow 265000037	1411- 008	 1287595	
		 DARK BEIGE	S 4005-Y20R	27,5	25131918	25136918	–	–	UNI STAIRS dark beige 25172116	TISSE grey beige 265000057	1411 009	 1287830	
		 DARK GREY	S 6502-B	13,9	25131916	25136916	–	–	UNI STAIRS grey 25172117	UNI dark grey 265000041	1411 009	 1287836	
		 INTENSE JEAN	S 5020-B	15,5	25131943	25136943	–	–	UNI STAIRS medium alu 25172118	TISSE blue 265000010	1411 041 ou gris 011	 1287876	
		 INTENSE KAKI	S 5005-G50Y	24,7	25131934	25136934	–	–	UNI STAIRS medium alu 25172118	BRUSHED METAL silver 265000054	1411 011	 1287330	
		 INTENSE OLIVE	S 3030-G90Y	38	25131938	25136938	–	–	UNI STAIRS medium alu 25172118	UNI intense olive 265000047	1411 009	 1287869	
		 INTENSE PETROLE	S 5020-B30G	15,7	25131935	25136935	–	–	UNI STAIRS bright ice blue 25172122	UNI dark aqua 26500135	1411 044	 1287201	
		 INTENSE PLUM	S 6020-R10B	8,7	25131937	25136937	–	–	UNI STAIRS dark beige 25172116	UNI intense plum 265000051	1411 029	 1287872	
		 INTENSE TERRACOTTA	S 3040-Y70R	23,2	25131942	25136942	–	–	TISSAGE				

EXCELLENCE
TENDER SPECIFICATIONS

Tapiflex Excellence 80

The selected flooring similar to Tapiflex Excellence 80 belongs to the acoustic vinyl floors category under EN standard 649, available in 2m wide sheet with a Group T wear rating.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The product is built with a high density foam backing reinforced with glass fibre and a high quality printed design. The wear layer of 0.80 mm is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations.

It has an acoustic performance of 19 dB and a static indentation resistance ≤ 0.10 mm.

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below 10 µg/m³.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme.

Tapiflex Excellence comes with a 10 Year Warranty.

Acczent Excellence 80

The selected flooring similar to Acczent Excellence 80 belongs to the compact vinyl floors category under ISO standard 10582, available in 2m wide sheet with a Type I binder content.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The wear layer of 0.80 mm is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance ≤ 0.03 mm.

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below 10 µg/m³.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme..

Acczent Excellence comes with a 10 Year Warranty.

More excellent reasons to choose Tarkett Excellence

- ✓ 100% Phthalate Free
- ✓ No formaldehyde
- ✓ 100% recyclable
- ✓ Test reports and certificates available upon request
- ✓ Optimal indoor air quality
- ✓ TVOC≤10 µg/m³ after 28 days
- ✓ FloorScore® certified
- ✓ ISO 14001 certified production site
- ✓ REACH Compliant and CE Marking

SPECIFICATION DATA

The Excellence range, with its 127 decors offers one of the most highly creative heavy-traffic heterogeneous vinyl solutions on the market. The range is 100% phthalate free and the VOC in air emission rate is very low; less than 10 µg/m³. The range includes acoustic solutions (19dB) roll and tile formats and a compact and a loose-lay option, all with a 10 year product warranty.

Table with 6 columns: TECHNICAL DATA, STANDARD, TAPIFLEX EXCELLENCE 80 (SHEET), TAPIFLEX TILES 65, ACCZENT EXCELLENCE 80 (SHEET), ACCZENT UNIK (SHEET) Loose Lay Offer. Rows include Classification, Wear group, Wear layer binder content, TECHNICAL CHARACTERISTICS, PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041), TECHNICAL PERFORMANCES, ENVIRONMENTAL PERFORMANCES, and COLOURS.

The above information is subject to modification for the benefit of further improvement. (12/17).

CUSTOMS TARIFF : 4820 5000 00

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



*For information - not binding. **Long Modern Oak, Oak Tree, Scandinavian Oak.

(1)Please note that slip resistance may be impacted by usage and cleaning operations.

(2)For Acczent Unik, please contact your sales representative.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com



Disclaimer : Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

