


COMPACT HETEROGENEOUS
VINYL FLOORCOVERING

Topaz Wood

- Heavy traffic flooring ideal for commercial and residential areas
- High comfort flooring with outstanding hygiene performance
- Excellent resistance to indentation and abrasion (0.7mm wear layer)
- Total thickness 2.5 mm
- Classic wood designs
- TopClean PUR surface treatment for easy, low cost maintenance

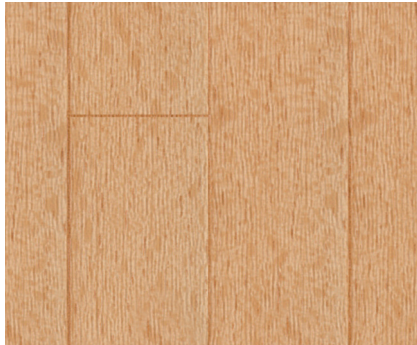


006 Beech Light Brown



025 Beech Beige Brown



030 Arcadia Brown Natural

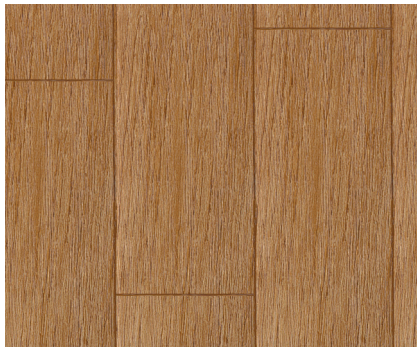

005 Antik Oak Light Brown



028 Soft Elm Natural



029 Arcadia Middle Natural



031 Arcadia Light Grege



027 Antik Oak Light Natural



032 Arcadia Light Yellow



001 Soft Elm Brown

COMPACT HETEROGENEOUS
VINYL FLOORCOVERING

Topaz Wood

Specification

With a 0.7mm PVC wear layer, the Topaz wood range is a competitively priced compact heterogeneous vinyl floorings with good resistance to indentation and abrasion. A coordinated pallet of wood designs makes this a good choice for heavy traffic area such as Education Healthcare and Retail as well as Residential applications.

The surface benefits from TOPCLEAN reinforcement which means no wax and no polish and good cleaning and maintenance properties.

Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions.



Choose to use better materials – natural and renewable where possible



Select flooring produced with fewer resources



Ensure safer, healthier products that contribute to wellbeing in people friendly spaces



Reuse and recycle materials through participating in recycling

Tarkett's commitments to VOC* emissions

Currently, all floorings that Tarkett manufactures have VOC emissions of less than 100µg/m³ (TVOC after 28 days) contributing to better interior air quality. This makes Tarkett an industry reference for VOC reduction with floorings that have 10 times less VOC emissions than current European standards. Our commitment to better air quality in buildings and homes is a key part of our new Balanced Choice Tag. It gives information about the content of our products and how they contribute to sustainable development enabling customers to make their balanced choice.

* VOC: Volatile Organic Compound



Technical data	Standards	Topaz
Type of floorcovering	EN 649	PVC floorcovering
Classification	EN 685	Commercial 34 Industrial 43 ESf

Technical Characteristics	Standards	Topaz
Total Thickness	EN 428	2.50 mm
Wear layer thickness	EN 428	0.70 mm
Total Weight	EN 430	2900g/m ²
Form of delivery	EN 426	Rolls: 23 lm x 2 m 5626 _ _ _ (3 digit colour no.)

Technical Performance	Standards	Topaz
Polyurethane reinforcement (PUR)		TopClean
Abrasion	EN 660-2	Group T: ≤ 2mm
Residual indentation	EN 433	≤ 0.10 mm
Furniture leg	EN 424	No damage
Castor chair	EN 425	No damage
Dimensional stability	EN 434	≤ 0.10%
Curl resulant to heat	EN 434	≤ 8mm
Reaction to fire	EN 13501-1	C _{fl} - S1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1 >10 ¹⁰ ohms
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN 423	High resistance
Resistance to bacteria	EN ISO 846	High fungi effect - Grade 0 Bacteriostatic effect
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Underfloor heating	DIN 56212	Suitable
Colours		Wood: 10

The above information is subject to modifications for the benefit of further improvement. (05/12). For more detailed technical information, please contact Tarkett. Follow Tarkett's installation and maintenance instructions carefully. These instructions are available on request.

53% Natural

15% Recyclable Recycled content

<100µg/m³
Better Indoor Air Quality
*TVOC AT 28 DAYS

Top Clean
PUR REINFORCED

NO WAX
NO POLISH

A+ BRE
GENERIC ENVIRONMENTAL RATING

Heterogeneous floors to EN649 have a generic A+ environmental rating in major use areas such as healthcare and education. www.br.co.uk/greenguide

EN 14841:2004

Manufactured by:
Tarkett Luxembourg SA
L-9879 Lœwenwer
LUXEMBOURG

EN 649
Topaz

According to European Classification EN 685

Plank width table

Colour Number	Colour Name	Plank Size (L x W) mm
006	Beech Light Brown	Variable
025	Beech Beige Brown	Variable
030	Arcadia Brown Natural	16.6 x 100
005	Antik Oak Light Brown	10 x 100
028	Soft Elm Natural	14.3 x 100
029	Arcadia Middle Natural	16.66 x 100
031	Arcadia Light Grege	16.66 x 100
027	Antik Oak Light Natural	10 x 100
032	Arcadia Light Yellow	16.66 x 100
001	Soft Elm Brown	14.3 x 100

Welding rod table

Colour No.	Welding Rod No.	Colour No.	Welding Rod No.
5626001	1287344	5626028	1292387
5626005	1287153	5626029	1291451
5626006	1294316	5626030	1287475
5626025	1287318	5626031	1289803
5626027	1289538	5626032	1287378

Tarkett Limited Lenham, Maidstone, Kent ME17 2QX, United Kingdom. Tel 01622 854040 Fax 01622 854520 www.tarkett.co.uk Email: uksales@tarkett.com



www.tarkett.co.uk