



flexplus
tenon

Quality | Style | Choice

www.tenonpartitions.co.uk

flexplus



flexplus
at a glance

General Office

Durable Surfaces

Areas of use



Acoustic performance

- Solid modules - standard construction - up to 29dB (Rw).
- Glazed modules - standard construction - up to 29dB (Rw).
- Door modules - standard cellular core - up to 20dB (Rw).

Construction Options

- Solid modules - standard construction from plasterboard honeycomb panels or hardboard faced flaxcore panels. Many other finishes available.
- Glazed modules - all elevation types incorporating single centre, single offset and double glazing and venetian blinds.
- Door modules - standard frames are fitted with 1981 x 838 x 44mm doors. Frames will also accept most door types including glass.

Max Construction Heights

- Solid modules - standard construction - up to 3600mm. Specialist sections can be used to achieve heights of 6000mm.
- Glazed modules - maximum recommended height using standard sections - 3000mm. Specialist sections can be used to construct heights of 6000mm.



Versatility

Tenon Flexplus is a fully demountable and re-locatable multi-purpose aluminium partition system that is simple and quick to install.

Flexplus is based on a module width of 1200mm, offering the flexibility to allow changes in layout whilst minimising wastage.

The options available, not only in construction methods but also with section, panel, door type and joint details, make it ideal for a variety of locations.

The system is constructed using aluminium channel and upright sections, together with aluminium or plastic glazing beads and a choice of three door frame profiles.

Solid construction is achieved with the use of plasterboard faced honeycomb or hardboard/laminate faced flaxcore panels.

All Flexplus components are readily available throughout SIG Interiors stockists offering a practical partition system that combines fastrack construction with aesthetics and flexibility.





Flexibility

Tenon Flexplus offers a choice of glazing details. Single, single offset and double glazing sections are available to provide options to suit both design and cost constraints. 25mm and 15mm venetian blinds are available in a wide range of colours and are easily accommodated within the system with the use of switch posts.

Hollow core doors are available in natural wood finishes, including Ash, Koto, Oak, Cherry, Maple, Beech and Sapele and can accommodate any shape or size of vision panel or lipping.

To complement Flexplus, the Tenon range of ironmongery offers a wide choice of door furniture in a variety of finishes.





Adaptability

The Flexplus system allows construction of partitions from barrier height up to 6000mm. All aluminium sections are available in the standard range of RAL and BS colours, to complement any corporate colour scheme.

Base section detailing can include traditional laminate face fixed skirting or aluminium base and clip-in skirting for cable management.

For more information or advice on this system's performance please contact the Tenon Technical Department.



Flexplus is durable and flexible in application. Designed for use in general office areas.





flexplus
tenon

Tenon Flexplus is a demountable and re-locatable modular partition system that is ideal for general office areas. Quick and easy to install, it provides a cost effective solution for locations where acoustic and fire performance are not required.

A number of construction methods are possible and by using the full range of panels available, the system is also suitable for both light industrial and basic 'cleanroom' installations.

Components

The major components of the system are an aluminium reversible head channel, upright and junction posts together with a choice of base details.

Size


Tenon Flexplus is based on a module size of 1200mm wide by 54mm thick. With the use of specialist sections, the system can be constructed up to heights of 6000mm.

Panels

Flexplus may be fitted with various panel types to suit the chosen specification. Honeycomb and flaxcore panels are supplied with square edges and are fitted within the system's upright posts. In addition to laminate facings, steel and aluminium can be bonded to a variety of cores for use in light industrial or heavy traffic areas.

If monobloc construction is specified, panels are supplied with bevelled and rebated edges.

If cable management is required at the base of the partition, aluminium base section P97 is recommended for use in conjunction with clip in skirting profile P98.

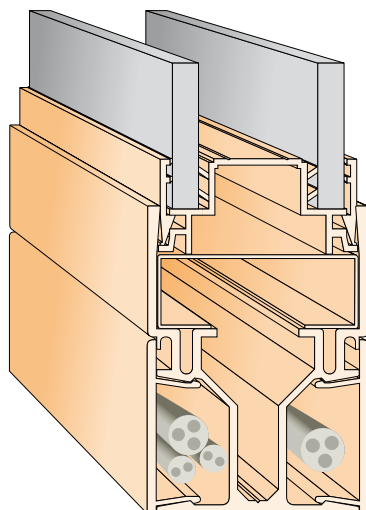

Appearance

Aluminium profiles are supplied from stock in a silver anodised finish, Grade AA5, but may be powder coated in a range of seventeen standard colours:

RAL 5003 Dark Sapphire Blue	BS:00 A 01 Ash Grey
RAL 5010 Gentian Blue	BS:00 A 05 Goose Grey
RAL 5012 Light Blue	BS:04 E 53 Poppy Red
RAL 5014 Pigeon Blue	BS:08 B 15 Magnolia
RAL 6005 Moss Green	BS:08 B 29 Van Dyke Brown
RAL 7011 Iron Grey	
RAL 7016 Anthracite Grey	
RAL 7035 Pale Grey	
RAL 9005 Jet Black	
RAL 9006 Silver	
RAL 9010 Pure White	
RAL9016 Traffic White	

Standard BS 4800 and RAL colours not included in the above list are available. However, these may be subject to longer lead times and additional costs.

Plasterboard faced honeycomb and hardboard faced flaxcore panels can be supplied unfinished for decoration on site or be factory finished with the vinyl or laminate or your choice.

Glazing is carried out with the use of pre-bracketed transoms and a choice of plastic or aluminium glazing sections, allowing for centre single, single offset and double glazing. Glass between a thickness of 6mm and 6.4mm can be accommodated within the system.

All glass fitted within the system should comply with Approved Document N of The Building Regulations 1993. Part N1 covers glazed areas of critical locations with regard to safety. This includes all full height partitions, half glazed partitions adjacent to doors and vision panels in doors. Part N2 covers manifestation of glazing in critical locations where people may collide with it.

A full glazing supply service is available for all Flexplus partitions. Please contact your local Tenon stockist for details.

Venetian Blinds


Flexplus double and single offset glazing sections allow 15mm and 25mm venetian blinds to be fitted within the system. Where blinds are specified, it is recommended that a demountable blind post is used to allow the remote control knob to be fitted.

Please contact your local branch for details of the service provided.

Door Modules

Standard door frames are supplied in universal frame packs (i.e. left or right handed), with a choice of frame profile (see below), and come pre-mitred complete with pre-cut aluminium transom, factory fitted hinges, Tenon lock box and door seal. The door seal has been tested as a smoke seal and complies with the requirements of BS 476 part 31.1.


Three door frame profile choices:

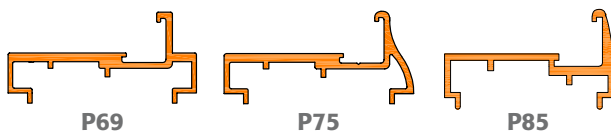

Doors

Doors are available with veneered or laminate facings with a choice of hardwood or laminate lippings. Cellular core doors can be supplied in standard sizes. Veneers available include Sapele, Cherry, Oak, Ash, Koto, Maple and Beech.

The full range of Tenon joinery options are available including vision panels, relipping etc.

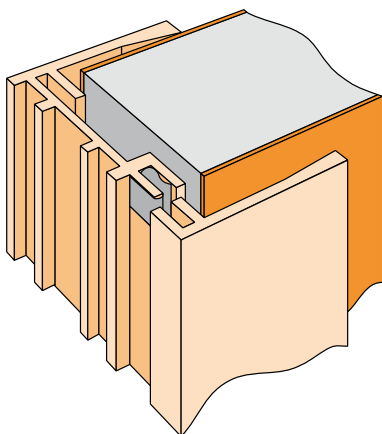

Wherever solid or part glazed modules abut a wall, the use of clip fit wall abutment section P92/P93 is recommended to allow the fitting of the last panel.

Sound

Tenon Flexplus has been tested at the Building Test Centre in accordance with B.S. 2750: Part 3 1980 :ISO 140/111 - 1978 in accordance with BS821: part 1: 1984: ISO 717/1 - 1982(Rw)

Weighted Sound Reduction Index Rw

- | | | |
|---------------|---|-----------|
| Test 1 | Solid partition constructed with 46mm plasterboard faced honeycomb panels. | 29dB (Rw) |
| Test 2 | Solid partition constructed with 46mm hardboard faced flaxcore panels. | 27dB (Rw) |
| Test 3 | Half Glazed partition constructed using 46mm hardwood faced flaxcore panels and two panes of 6.4mm laminated glass. | 28dB (Rw) |

It should be noted that all the above results were obtained under laboratory test conditions. The expected level of performance should take into account the type of ceiling, ducting, flooring etc present. The leakage of sound through poorly insulated parts of the partition will have a significant effect on the level of sound attenuation achieved.


Product Maintenance

All elements of the Flexplus system may be cleaned using a solution of mild detergent in warm water and a soft cloth or sponge. The frequency of cleaning will depend on the environment the partition is situated in and the level to which the surface has been soiled.


When cleaning vinyl faced plasterboard, avoid an accumulation of water of skirting level as this may lead to delamination of the vinyl covering.




flexplus - elevations

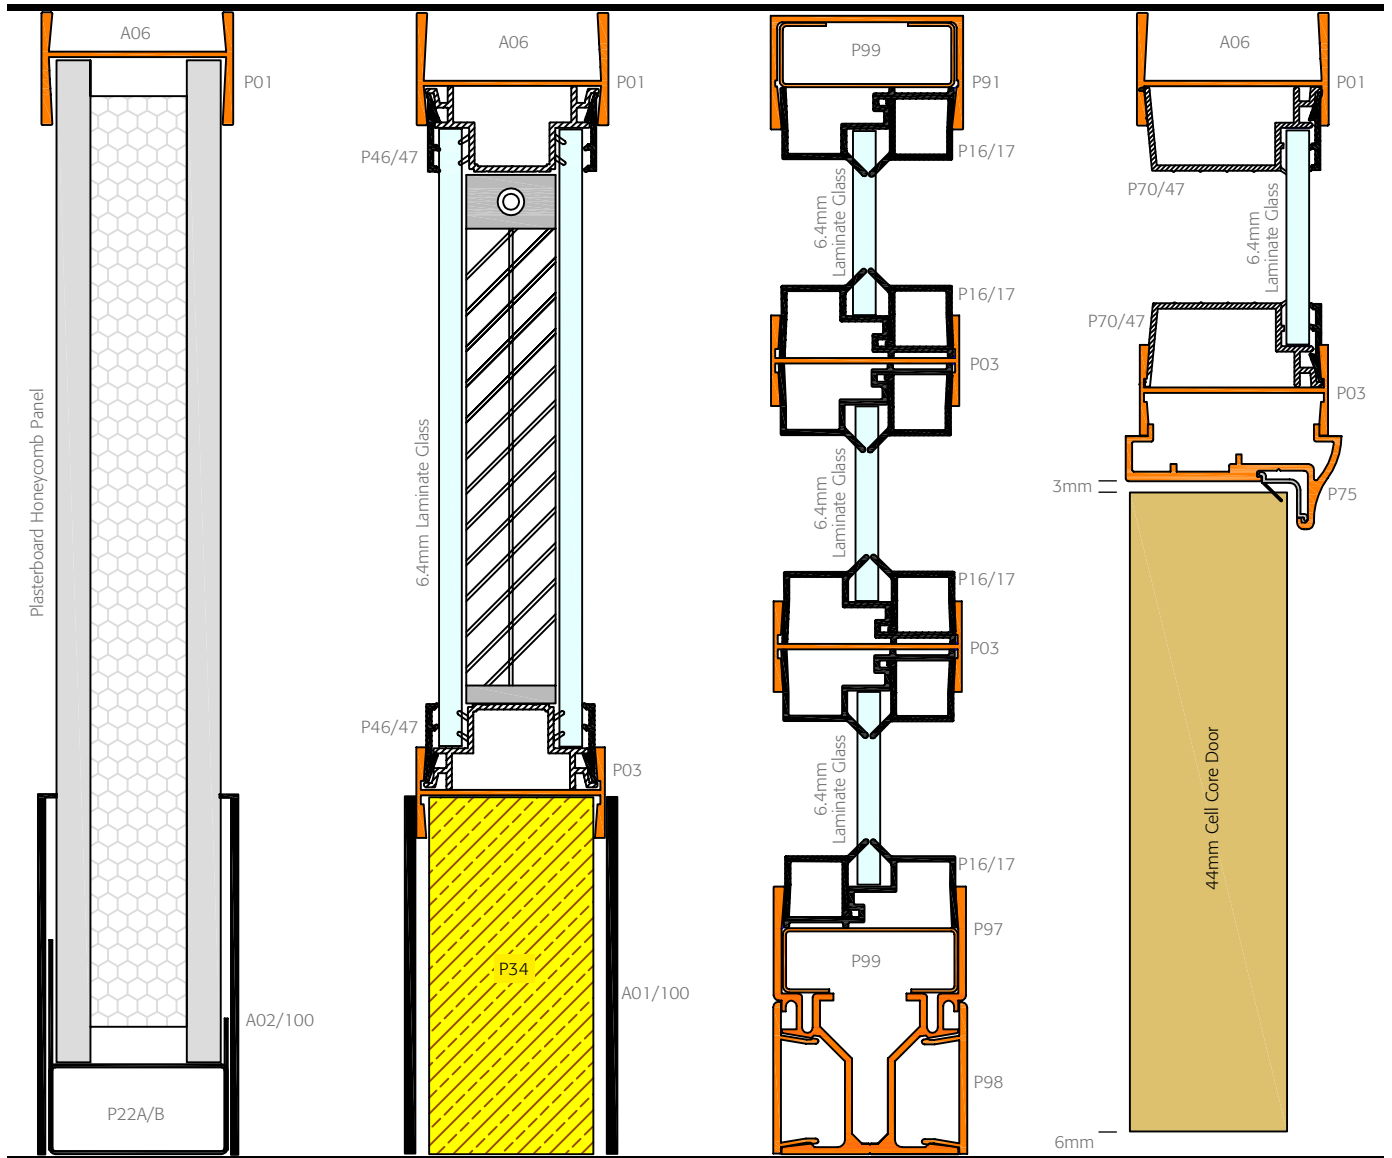


flexplus - plan details

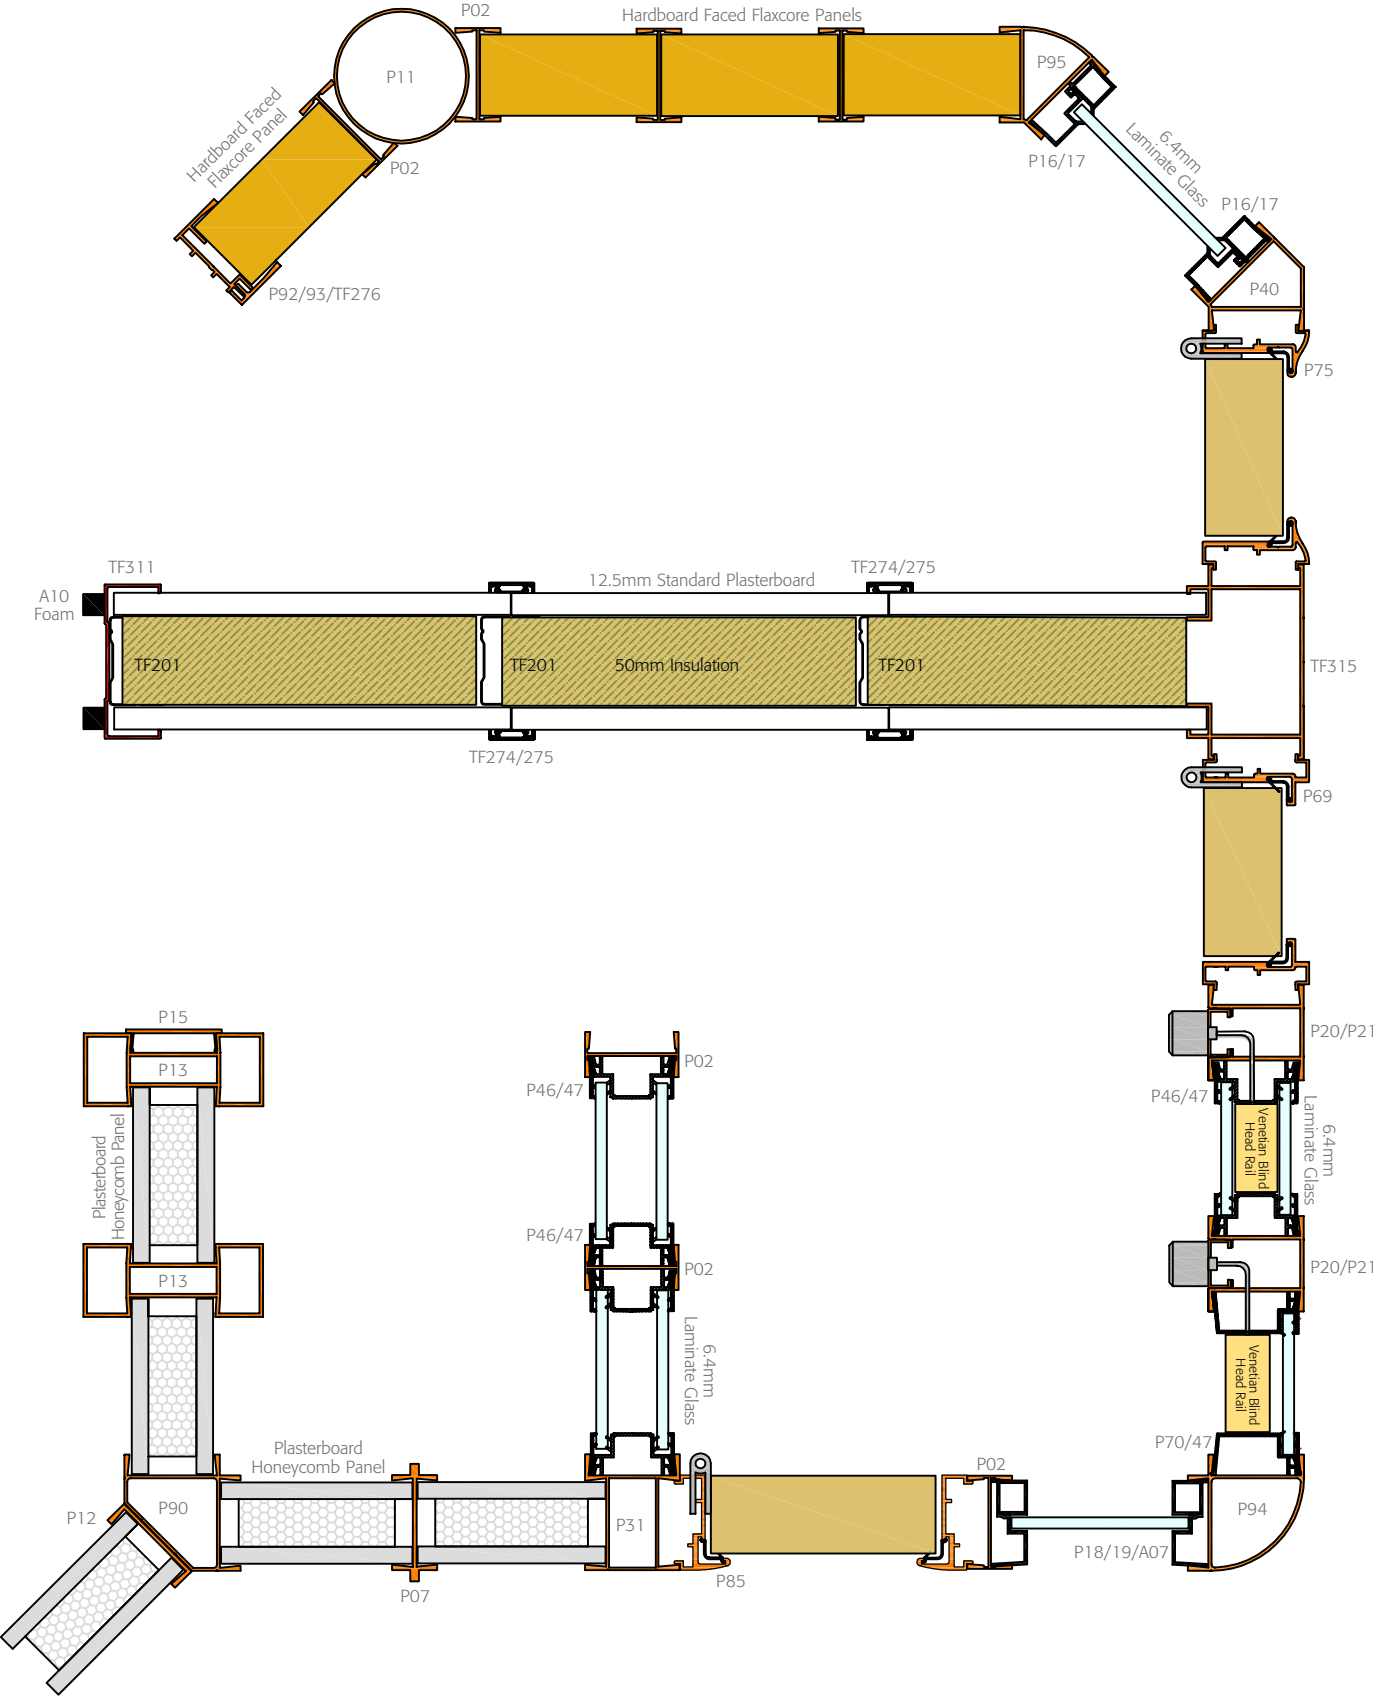


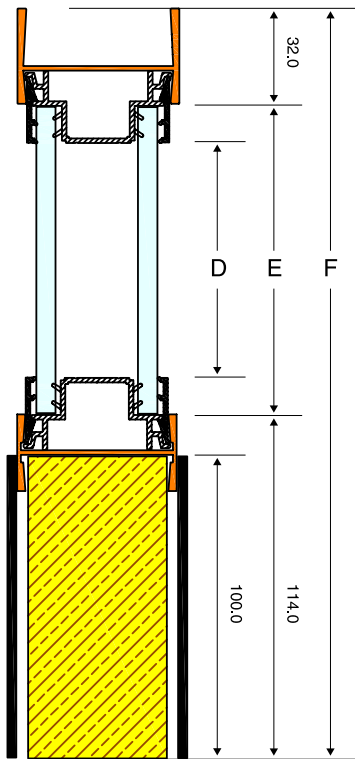


flexplus - glazing setting out details

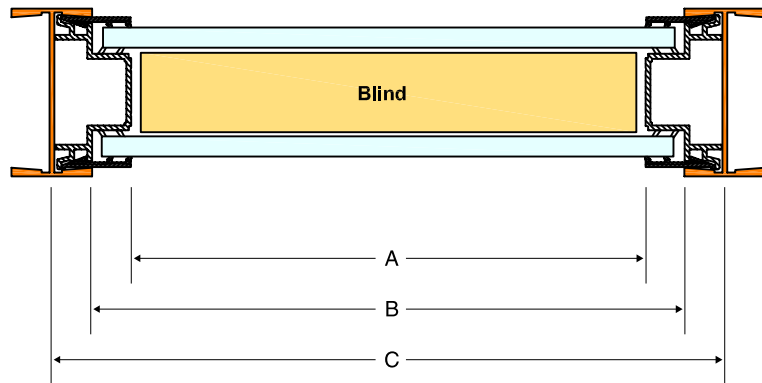

	WIDTH			HEIGHT
	METRIC			METRIC
DIM A	1155mm	BLIND APERTURE DIMENSIONS	DIM D	2529mm
DIM B	1180mm	GLASS APERTURE DIMENSIONS	DIM E	2554mm
DIM C	1204mm	STUD CENTRE DIMENSIONS	DIM F	2700mm

flexplus - door frame setting out details

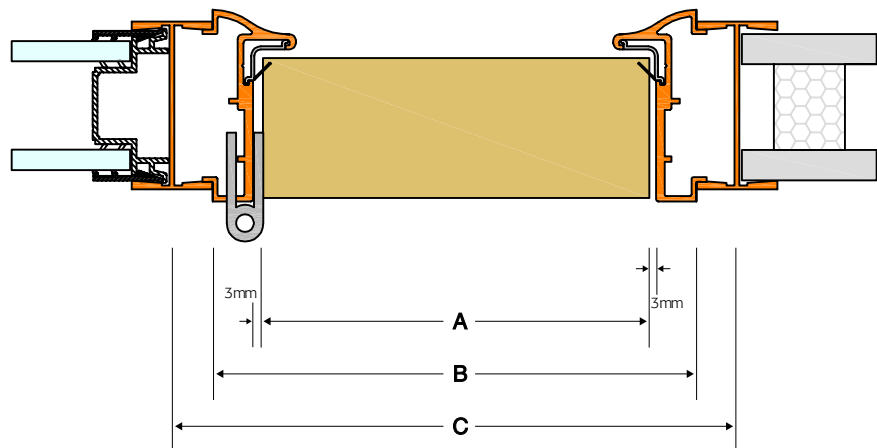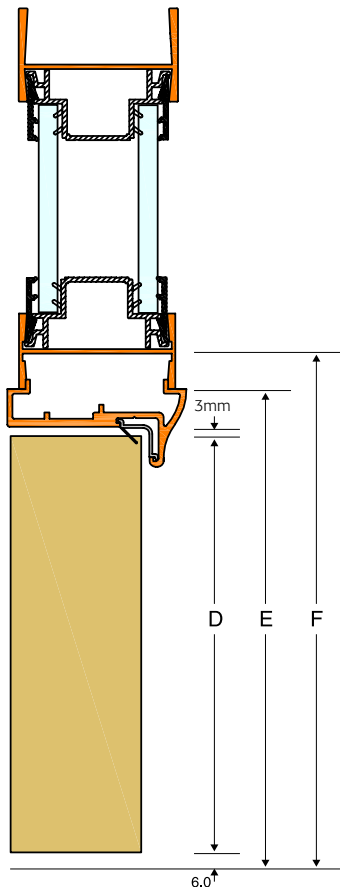

	SINGLE		DOUBLE	
	METRIC	IMPERIAL	METRIC	IMPERIAL
DIM A	826mm	838mm	1652mm	1676mm
DIM B	856mm	868mm	1684mm	1708mm
DIM C	881mm	893mm	1709mm	1733mm
DIM D	2040mm	1981mm	2040mm	1981mm
DIM E	2061mm	2002mm	2016mm	2002mm
DIM F	2074mm	2015mm	2074mm	2015mm

Section Details



P01 ALUMINIUM REVERSIBLE HEAD CHANNEL
Accepts glazed or solid panels at partition head.



P91 ALUMINIUM DEEP HEAD CHANNEL
Accepts solid panels or glazing with the inclusion of steel base and head platform (P99). Used primarily for 'monobloc' construction.



P99 STEEL BASE AND HEAD PLATFORM
Used to support solid panels and glazing details at both head and base partition. Use with deep head channel (P91).




P02 ALUMINIUM UPRIGHT POST
Equal leg section used vertically to accept solid or glazed panels. Also used as pre-cut transom (P03) for use horizontally. Use with steel angle bracket (A11).



P04/05 ALUMINIUM SCREW FIX WALL ABUTMENT POST
Upright post (P05) used in conjunction with screw fix flat section (P04) to enable fitting of the last panel at wall abutments.




P92/93 ALUMINIUM CLIP FIT WALL ABUTMENT POST
Upright post (P92) used in conjunction with clip fit section (P93) and steel clip (TF276) to enable fitting of the last panel at wall abutments. Clips should be fitted at either end and at 600mm centres between.



P06 ALUMINIUM SQUARE PROFILE 90° CORNER POST
Square profile 90° boxed corner post. Used in conjunction with two steel angle brackets (A11).




P07 ALUMINIUM NIBBED UPRIGHT POST
Strengthened upright post for use in partitions over 3600mm high and up to 4200mm.



P11 ALUMINIUM CIRCULAR UPRIGHT POST
Used in conjunction with upright post (P02) at intersections where non standard angles are required.




P12 ALUMINIUM SHALLOW CHANNEL OR 'HALF POST'
Used in conjunction with three way section (P31) to form a four way post or angled corner post (P40) to form a 'Y' post.



P13 ALUMINIUM HEAVY DUTY POST
Used as an upright post and head section for heights up to 6000mm or when stability is required within the system.




P15 ALUMINIUM INFILL SECTION
Used to cover any open face on sections within the system.




P16/17 PLASTIC SINGLE GLAZING CHAIR & BEAD
Accepts glass with a thickness of between 6 and 6.4 mm. Available in black, grey or white.



P18/19 ALUMINIUM SINGLE GLAZING CHAIR & BEAD
Used to match silver anodised or powder coated finishes. Will accept glass of various thicknesses depending on the size of the glazing foam used.




P20/21 ALUMINIUM DEMOUNTABLE BLIND POST
Comprising upright post (P20) and, infill section (P21). Used for the housing of venetian blind control cables and for general cable management. Use with steel clip (A24), one at each end and at 600mm centres in between.




P31 ALUMINIUM THREE WAY POST
Allows for three way intersections of solid/glazed or doorframe construction. Used in conjunction with two steel angle brackets (A11).



P34 FULL HEIGHT FLAXCORE GLAZING PACKER
Used at the base of the partition in full height glazed modules to support transom sections (P03) in lieu of pan & shoe set (P22A/B).



P40 ALUMINIUM SQUARE 135° CORNER POST
Used to allow for solid, glazed or doorframe construction at 45° adjacent to a straight run. Used in conjunction with two steel angle brackets (A11).



P46/47 PLASTIC DOUBLE GLAZING CHAIR & BEAD
Accepts glass with a thickness of between 6 and 6.4mm. Available in black, grey and white.




P70/47 PLASTIC SINGLE OFFSET GLAZING CHAIR & BEAD
Accepts glass with a thickness of between 6 and 6.4mm. Available in black, grey and white.




P65 ALUMINIUM UNIVERSAL SINGLE DOOR FRAME PACK
Universal (non handed) door frame pack comprising pre-cut sections milled for lock box and hinges, plastic seal, lockbox, 75mm steel hinges and pre-cut/ bracketed transom.




P75 ALUMINIUM UNIVERSAL CURVED PROFILE SINGLE DOOR FRAME PACK
Contents as above.




P85 ALUMINIUM UNIVERSAL RADIUSED PROFILE SINGLE DOOR FRAME PACK
Contents as above.




P90 ALUMINIUM ANGLED 90° CORNER POST
Corner post used as an alternative to P06/P94 or in conjunction with Shallow channel P12 to create a 'Y' post. Use with two steel angle brackets (A11).




P94 ALUMINIUM RADIUS 90° CORNER POST
Corner post used as an alternative to P06/P90. Used in conjunction with two steel angle brackets (A11).



P95 ALUMINIUM RADIUS 135° CORNER POST
Corner post used as an alternative to P40. Used in conjunction with two steel angle brackets (A11).



P97/98/99 ALUMINIUM BASE SECTION & CLIP IN SKIRTING
Used at the base of the partition and fitted with steel platform (P99) for the support of solid panels and glazing sections. Cable management is accommodated with the use of clip fit skirting section (P98). Key component when specifying 'monobloc' construction.



P22A/B STEEL TWO PART FLOOR PAN & SHOE SET
Used at the base of the partition on solid or part glazed modules. Two pans & shoes should be used for each 1200mm module. Provides room for cable management at floor level.



A01 LAMINATE SKIRTING
Face fixed skirting 75 / 100 / 150mm high. Use with 6 x 3mm black skirting foam (A07).




A02 ALUMINIUM SKIRTING
Face fixed skirting 75 / 100mm high. Use with 6 x 3mm black skirting foam (A07).



A06 HEAD CHANNEL / ABUTMENT FOAM
Used within head section (P01) and abutment section (P92/93) on uneven ceilings and walls.



A07 SKIRTING FOAM
6 x 3mm black self adhesive foam, fitted to the top edge of laminate skirting to create a shadow gap between upright posts.



D05 PLASTERBOARD HONEYCOMB PANEL
Comprising 9.5mm plasterboard bonded either side of a cardboard honeycomb core to create a 46mm thick finished panel.

Exclusive stockists of Tenon Partition Systems:



Scotland

Glasgow
21 Dava Street,
Glasgow,
G51 2JA
Tel: 0141 440 6960
Fax: 0141 440 6961

Tyneside

Gateshead
Unit A389,
Western Avenue,
Team Valley Trading Estate,
Gateshead, Tyne & Wear,
NE11 0SZ
Tel: 0191 482 4211
Fax: 0191 482 3500

North West

Liverpool
Horn House Lane,
Knowsley Industrial Park,
Liverpool, L33 7YQ
Tel: 0151 547 5288
Fax: 0151 547 5299

Manchester
8 Commerce Way,
Kiwi Park, Trafford Park,
Manchester, M17 1HW
Tel: 0161 874 5311
Fax: 0161 874 5312

North East

Leeds
Unit 3,
Elland Road Industrial Park,
Elland Way, Elland Road,
Leeds, LS11 0EY
Tel: 0113 270 0333
Fax: 0113 270 2839

Sheffield
Nunnery Drive,
Sheffield, S2 1TA
Tel: 0114 2317 317
Fax: 0114 2317 318

Midlands

Birmingham
85 Chester Street,
Aston, Birmingham, B6 4AE
Tel: 0121 380 1600
Fax: 0121 380 1616

Leicester
Unit E, Braunstone Industrial Estate,
139 Scudamore Road,
Leicester, LE3 1UQ
Tel: 0116 255 1585
Fax: 0116 255 1745

Nottingham
Unit 3,
Cossall Industrial Estate,
Coronation Road,
Ilkeston, DE7 5UA
Tel: 0115 944 1359
Fax: 0115 930 9249

Birmingham
(West Bromwich),
Unit A, Halfords Park,
Halfords Lane, Smethwick,
Birmingham, B66 1EL
Tel: 0121 565 5700
Fax: 0121 558 3233

Anglia

Bedford
Telford Way, Bedford,
MK42 0PQ
Tel: 01234 761112
Fax: 01234 343584

Luton
Units 11-12,
Stadium Industrial Estate,
Cradock Road,
Luton, LU4 0JF
Tel: 01582 594222
Fax: 01582 595222

Norwich
Unit 27,
White Lodge Business Park,
Hall Road,
Norwich, NR4 6DG
Tel: 01603 766471
Fax: 01603 764685

London

London South - Croydon
Unit 1 Beddington Lane
Industrial Estate,
115-135 Beddington Lane,
Croydon, CR0 4TS
Tel: 020 8684 7775
Fax: 020 8684 0982

London North - Edmonton
Unit 14A,
Banksia Road,
Edmonton, London,
N18 3BF
Tel: 020 8884 3444
Fax: 020 8884 5471

London Central - Southwark
Unit 6,
Bricklayers Arms,
Distribution Centre,
Mandela Way,
London, SE1 5SR
Tel: 020 7064 4900
Fax: 020 7064 4919

London East - Barking
Unit 1, New England Estate,
Gascoigne Road, Barking,
London, IG11 7NZ
Tel: 020 8477 9499
Fax: 020 8591 0351

London West - Twickenham
Twickenham Trading Estate,
Rugby Road, Twickenham,
TW1 1DQ
Tel: 020 8891 5971
Fax: 020 8892 5218

South West

Bristol
Unit 200, North Bristol Park,
North Way, Filton,
Bristol, BS34 7QH
Tel: 0117 931 3432
Fax: 0117 931 3433

Cardiff
Units H&J, Southpoint Ind Est,
Clos Marian,
Cardiff, CF10 4SP
Tel: 029 2047 4787
Fax: 029 2047 4797

Plymouth
87 St Modwen Road,
Parkway Industrial Estate,
Marsh Mills, Plymouth
Devon, PL6 8LH
Tel: 01752 675414
Fax: 01752 675413

South East

Brighton
Lancing Unit 1,
Lancing Business Park,
Chartwell Road,
Lancing, West Sussex,
BN15 8TU
Tel: 01903 218115
Fax: 01903 823298

Heathrow
Blackthorne Road,
Poyle Trading Estate,
Colnbrook,
Slough, SL3 0DU
Tel: 01753 691818
Fax: 01753 694485

Maidstone
Unit 5 Larkfield Mill,
Bellingham Way,
Larkfield, Aylesford,
Kent, ME20 6SQ
Tel: 01622 791100
Fax: 01622 791375

Oxford
Unit 5 Curbridge Business
Park, Downs Road,
Witney, Oxon,
OX29 7WJ
Tel: 01993 700993
Fax: 01993 708993

Portsmouth
Unit 2 Quadra,
Sharps Close,
Portsmouth
PO3 5PS
Tel: 02392 696733
Fax: 02392 661406

Southampton
Unit 41a Oriana Way,
Nursling Industrial Estate,
Southampton,
SO16 0YU
Tel: 023 8074 3799
Fax: 023 8074 3948



tenon

Quality | Style | Choice

www.tenonpartitions.co.uk

Hillsborough Works, Langsett Road, Sheffield, S6 2LW
Tel: 0114 231 8030 Fax: 0114 231 8031



© Tenon Partitions. A product of

