

Plastic Access Panels


Plastic Access Panels provide a high quality low cost solution for access to building services in ceilings and walls. Primarily used in domestic situations for access to rodding eyes and stop cocks the panels are very simple to fit. The narrow 17.5mm profile produces a lightweight solution that can be used in all types of wall or ceiling construction. The panels are manufactured in the UK from UV stabilized ABS with a lightly textured surface that will not discolour and can be over painted.

Fitting using proprietary building adhesives or screws, the hinged removable door snaps in to place and has a positive quality action. Open with a screwdriver or coin in the visible slot opposite the hinge edge or use the key where the optional key lock has been specified.

Use as a repair panel to cover a hole in the back of a kitchen cupboard for access to a stop tap or as a visible designed detail to a rodding eye. The panel finishes an access point professionally and economically.




Example of surrounding construction

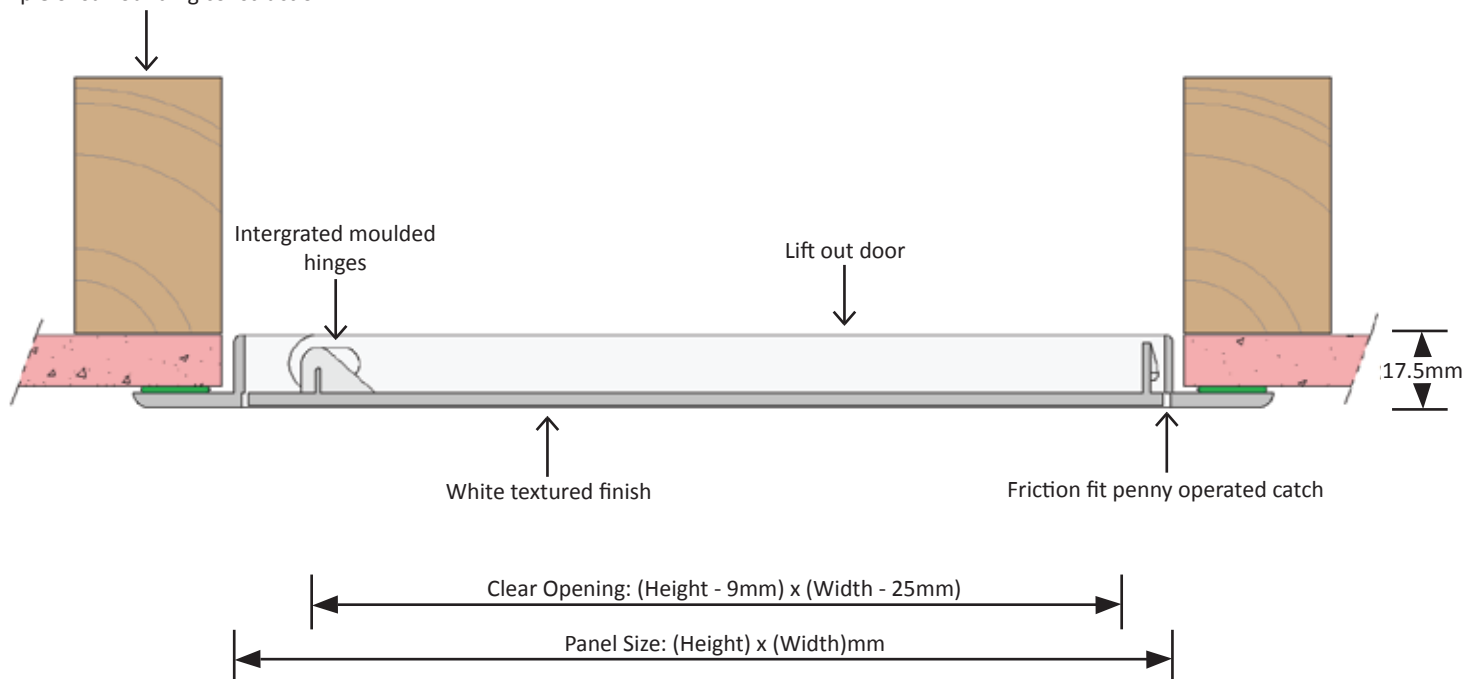

Our design office will be pleased to tailor a drawing to your exact requirements in your preferred format from 3D rendered images to line drawn DXF, DWG or other CAD formats.

For Walls & Ceilings

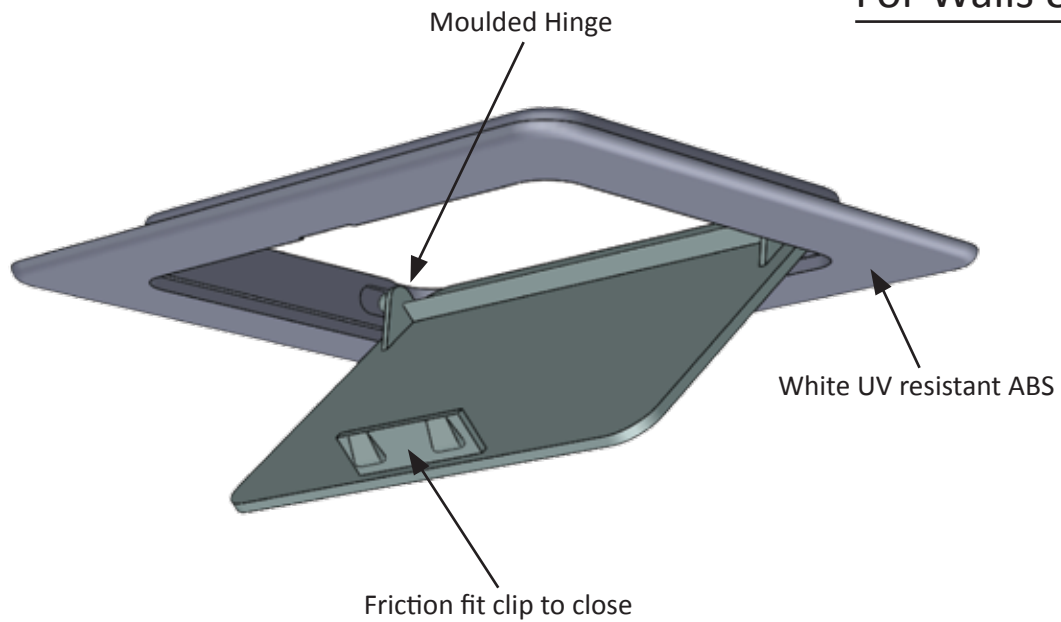

Technical & Fitting Details

NS Plus

Door tray & frame - Moulded from UV stabilised ABS plastic with a 25mm wide picture frame to cover the cut edge of the aperture. Colour approximates to matt white RAL 9010 20% Gloss.

Hinge & lock mechanism - Moulded clip shut friction lock with integral pivot hinge locating into grooves in the frame.

Fire Rating - Not available to this range of panels.

Further Information - CAD DXF cross-section drawings and full technical specifications are available on request. Please call or email a member of our technical team for further information.

Availability - Stock sizes (as below) available with next day delivery if ordered before 2pm.

Fitting Preparation - Prepare a clear trimmed and protected opening in the structure 5mm larger than the ordered panel.

Fitting - Use proprietary silicone or No Nails type adhesive to fix the panel in place. For ceiling applications it is recommended to drill through the internal frame section to achieve a mechanical fixing.

Air Tightness - 100% airtight options available. Please call our technical team for information

Acoustic Rating - Not available for this range at the moment. Other panels available to a maximum reduction of 63 dB Rw. Testing carried out under laboratory conditions to BS EN ISO140-3: 1995 by an independent test center. See Premium range Acoustic panels.

Operation & Maintenance

Operation - Use a coin or flat head screwdriver in the slot provided to prise open the door.

Maintenance - Avoid abrasive cleaning materials. Annually or more frequently if used very regularly check the operation.

Stock Sizes

110 x 160 mm

150 x 150 mm

200 x 200 mm

300 x 300 mm

