


To achieve an airtight seal between the panels  
..... After fixing a panel into position, a  
"low expansion" - "adhesive" foam should be  
applied into the groove (as indicated), before  
fitting next panel. allow no more than 2-3 mins  
for foam to settle before joining panels.

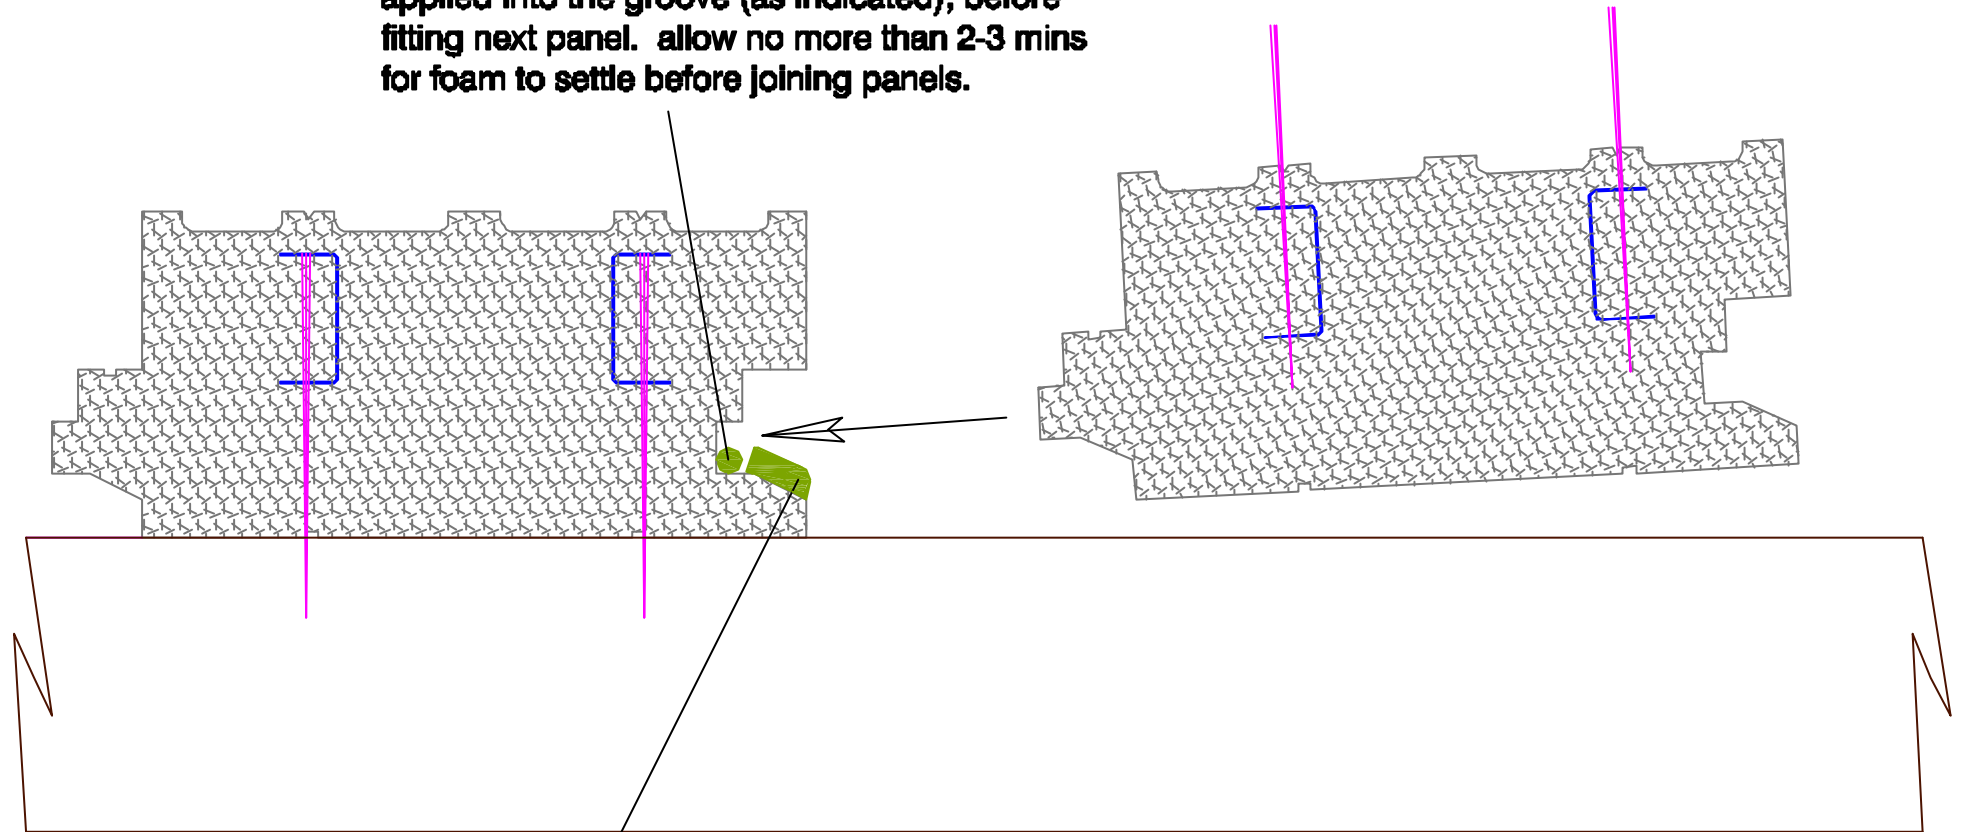

To complete the seal, ensure that the bead is  
continued down to the edge of the groove at  
both ends of each panel as indicated.

<b>thermo</b> house Insulated Concrete Formwork Killarney, Co. Kerry		
<b>Roofing Panel - 250</b> <b>Airtight Details</b>		
Scale -	NTS	Date:
		June 2011
Detail	Rev No.	Rev Date: