





PHOTOMETRIC GUIDE




15/23W LED - PLAIN VERSION

Luminaire Lumen Output:
15W = 1070lm
23W = 1450lm



18W LED - HOOD VERSION


Luminaire Lumen Output:
18W = 720lm



38W 2D LAMP (Ceiling mounted)

D.L.O.R. 59% / U.L.O.R. 0%
Factor:
28W 2D OPAL = 0.75
38W 2D OPAL = 0.75
28W 2D SATIN = 1.03

DIMENSIONS

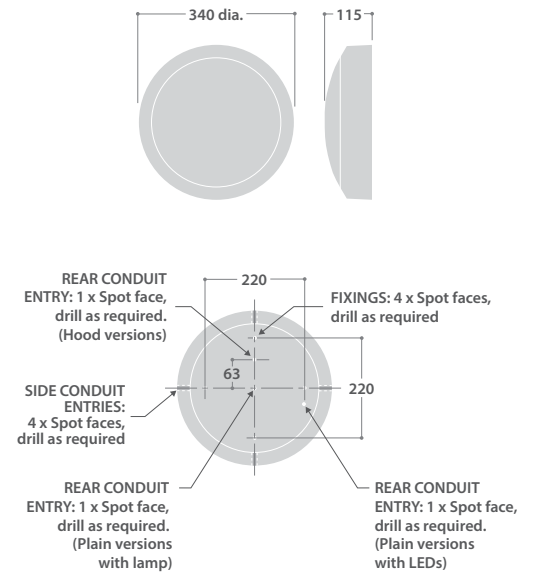

OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell ▲	PC	CT 14441LPC

▲ Hood / hood & grill versions only

ACCESSORIES

DESCRIPTION	CAT. No.
Tamper-resistant screw kit including key	CT 11699



Plain



Hood



Plain & Grill



Hood & Grill

IP66 CIRCULAR LED AND COMPACT FLUORESCENT LUMINAIRES

IP66 IK10 CE TC-T 2D LED

SPECIFICATION

- Strong die-cast LM2 aluminium body and cover frame. Graphite, full polyester powder finish as standard
- Silver or white finish options
- Two diffuser options - opal or high efficiency satin polycarbonate
- Choice of cover styles
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- Photocell option
- Fitted with lamp or 5000K/5700K LEDs

LED CHARACTERISTICS

Ra		LL/CW
15/23W - 70+	18W - 65	
°K		15W Plain & Grill 39.7
15/23W - 5700	18W - 5000	23W Plain 58.0
L70/B10		23W Plain & Grill 38.4
60K		18W Hood 32.7
P/U	%	18W Hood & Grill 35.0
P	>90	
R/Rx	PF	
R	>0.95	

For LED characteristics explanation see www.thorlux.com/led-characteristics

RANGE

	LAMP	PLAIN VERSION	HOOD VERSION	APPROX. kg	PLAIN & GRILL VERSION	HOOD & GRILL VERSION	APPROX. kg
HIGH EFFICIENCY SATIN DIFFUSER	15W LED	CT 14538L		3.0	CT 14540L		3.2
	18W LED		CT 14441L ♦	3.0		CT 14504L ♦	3.2
	23W LED	CT 14542L		3.0	CT 14544L		3.2
	26W TC-T ■		CT 11572J ♦	3.3		CT 11581J ♦	3.5
	28W 2D ▲	CT 11573J		3.7	CT 11574J		3.9
	38W 2D ▲	CT 11575J		3.7	CT 11576J		3.9
OPAL DIFFUSER	26W TC-T ■		CT 11460J ♦	3.1		CT 11461J ♦	3.3
	28W 2D ▲	CT 11462J		3.5			
	38W 2D ▲	CT 11464J		3.5			

- ▲ 3500K lamp fitted
- 4000K lamp fitted
- ♦ Photocell option

CIRCUIT TYPE - J - non-dimming (HF fluorescent) / L - non-dimming (LED)

COLOUR OPTIONS - add suffix: **SV3** - Silver / **W9** - White e.g. **CT 14538LSV3** etc.

EMERGENCY VERSION - prefix catalogue number with:

ECT - Emergency / **TCT** - AutoTest / **DCT** - Scanlight AT (LED versions only) e.g. **ECT 14538L** etc. Emergency, AutoTest and Scanlight AT versions add 0.7kg to weights listed or 0.3kg for LED versions

NOTE: Lamp more visible with High Efficiency Satin Diffuser than Opal Diffuser when lit



High efficiency satin diffuser



Opal diffuser

Web link: [Smart External System](#) >