



Chalk

Striking LED luminaire with innovative touch button control and excellent efficiency for classrooms and conference rooms

- Unobtrusive yet striking design to enhance and personalise any space
- Innovative touch button for user-control and adaptability
- Provides a stimulating and uplifting environment through direct and indirect illumination, whilst maintaining excellent efficacy of up to 92 Llm/W
- Available in dedicated asymmetric distribution for specialist whiteboard illumination



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

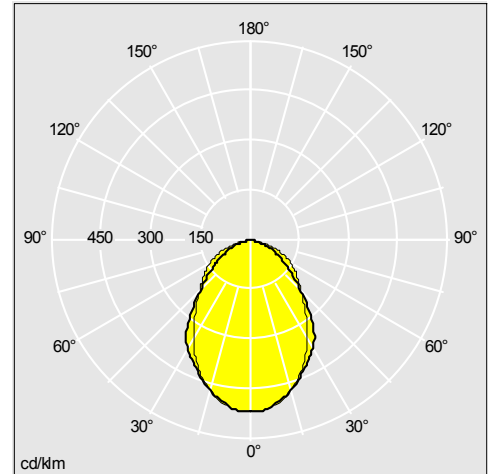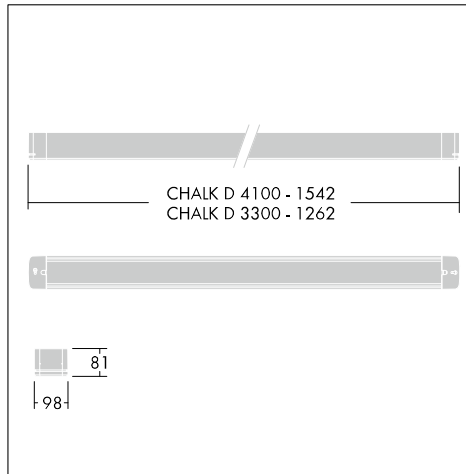

96221555

Material/Finish

Body: extruded aluminium, powder coated white
 End caps: die-cast aluminium, painted white
 Diffuser: opal microprismatic

Installation/Mounting

Suitable for surface mounting. Rear BESA mounting provision with cable and suspended entry into 3 way terminal block suitable to accept 2x2.5mm². Suspended version mounting kit supplied. Asymmetric version mounting bracket to be ordered separately (see ordering guide).

Specification

To specify state:

For direct/indirect versions: Wire suspended, powder coated aluminium, direct and indirect DALI dimmable LED luminaire, available with touch button control and/or integral sensor, with 5100lm or 6800lm outputs.

As Thorn Chalk (Direct/Indirect)

For direct and asymmetric versions: Surface mounted, powder coated aluminium LED luminaire, available with direct distribution or dedicated asymmetric distribution, with 3300lm, 3500lm, 4100lm or 4400lm outputs.

As Thorn Chalk (Direct/Asymmetric)

Chalk

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Chalk Direct				
CHALK D LED 3300 HFIX L840	LED		4,5	96221555
CHALK D LED 4100 HFIX L840	LED		5,3	96221556
Chalk Direct/Indirect				
CHALK DI LED 5100 HFIX L840	LED		4,5	96221560
CHALK DI LED 6800 HFIX L840	LED		6,5	96221562
CHALK DI LED 5100 HFSX L840	LED		5,7	96221563
CHALK DI LED 6800 HFSX L840	LED		6,5	96221564
CHALK DI LED 5100 HFIX SWD L840	LED		5,7	96221566
CHALK DI LED 6800 HFIX SWD L840	LED		6,5	96221567
CHALK DI LED 5100 HFSX SWD L840	LED		5,8	96221568
CHALK DI LED 6800 HFSX SWD L840	LED		6,5	96221569
Chalk Asymmetric				
CHALK A/S LED 3500 HFIX L840	LED		4,5	96221557
CHALK A/S LED 4400 HFIX L840	LED		5,3	96221559
CHALK A/S BRACKET			0,5	96221728